




## HIGH VOLTAGE FAST RECOVERY RECTIFIER


RoHS  
COMPLIANTFeatures

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375"(9.5mm) lead length, 5 lbs. (2.3kg) tension

DO-41

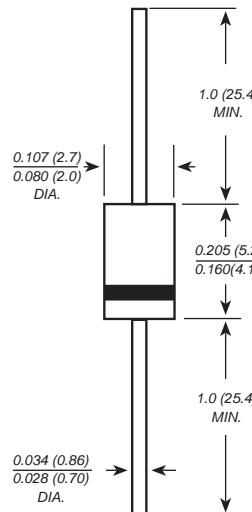

DO-15

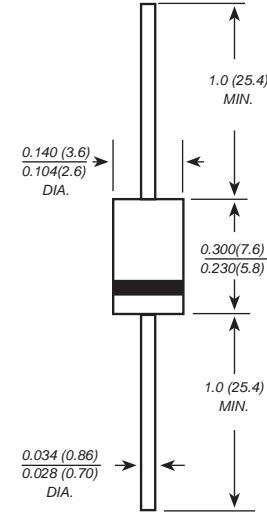Mechanical Data

Case : JEDEC DO-41/DO-15 Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.012 ounce, 0.33 grams(DO-41)

0.014 ounce, 0.40 grams(DO-15)

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	R1200F	R1500F	R1800F	R2000F	UNITS
		MDD R1200F	MDD R1500F	MD R1800F	MDD R2000F	
Marking Code						
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	1200	1500	1800	2000	V
Maximum RMS voltage	V <sub>RMS</sub>	840	1050	1260	1400	V
Maximum DC blocking voltage	V <sub>DC</sub>	1200	1500	1800	2000	V
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I <sub>(AV)</sub>		0.5		0.2	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>		30.0			A
Maximum instantaneous forward voltage at 0.5/0.2A	V <sub>F</sub>		2.0	4.0		V
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =100°C	I <sub>R</sub>		5.0	50.0		µA
Maximum reverse recovery time (NOTE 1)	t <sub>rr</sub>		500			ns
Typical junction capacitance (NOTE 1)	C <sub>J</sub>		15.0			pF
Typical thermal resistance (NOTE 2)	R <sub>θ JA</sub>		50.0			°C/W
Operating junction and storage temperature range	T <sub>J</sub> ,T <sub>STG</sub>		-65 to +150			°C

Note:1.Reverse recovery condition IF=0.5A,I<sub>R</sub>=1.0A,I<sub>rr</sub>=0.25A


2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.Thermal resistance from junction to ambient at 0.375"(9.5mm)lead length,P.C.B. mounted

## Ratings And Characteristic Curves


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

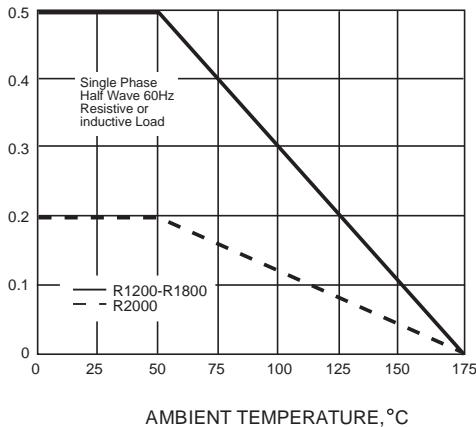


PEAK FORWARD SURGE CURRENT,  
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

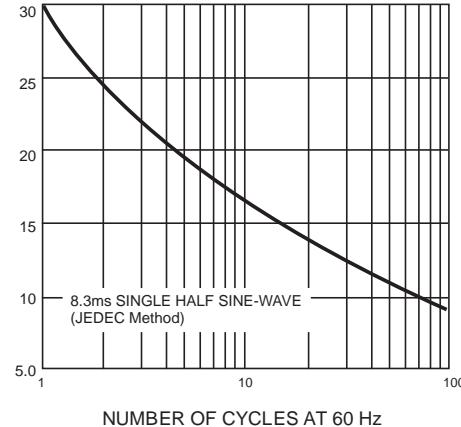


INSTANTANEOUS FORWARD  
CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

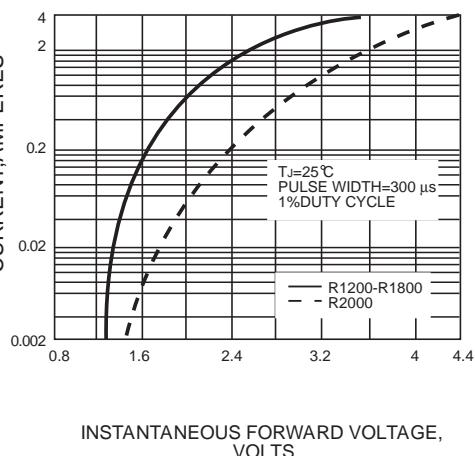


INSTANTANEOUS REVERSE CURRENT,  
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

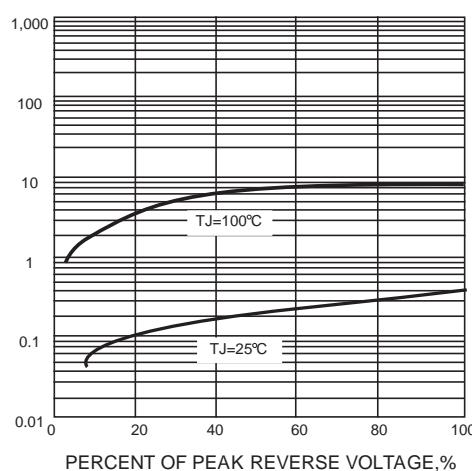


JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

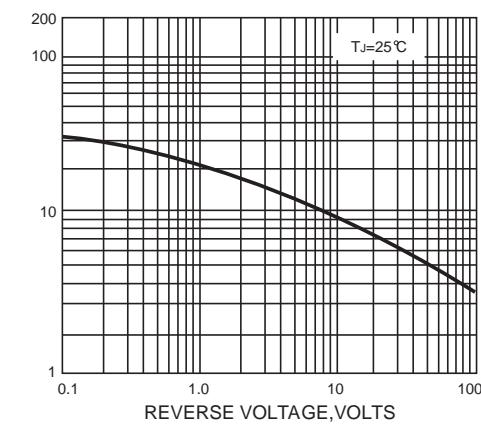

TRANSIENT THERMAL IMPEDANCE,  
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

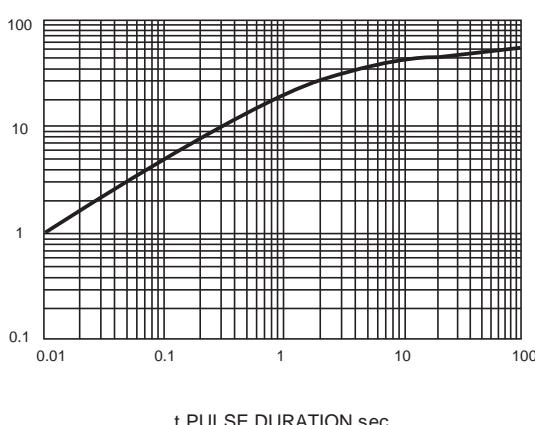

t, PULSE DURATION, sec.

The curve above is for reference only.