

55505 Hall Effect Flange Mount Geartooth Sensor



Features

- Ferrous target sensing
- Internal circuit protection
- Protection against severe and automotive environments
- Self adjusting magnetic range
- Automotive grade circuit protection
- High speed operation
- Short circuit and reverse voltage protection
- On board 10 bit A/D convertor

Benefits

- No chopper delay
- Rotational alignment to target not critical
- Immune to target run out

Benefits

- Wheel, transmission and camshaft speed sensing
- Geartooth sensor
- Rotary encoders
- Industrial
- Commercial
- Automotive

DIMENSIONS (in) mm



SPECIFICATIONS

Hall Type		Digital Switch 3 Wire (Voltage Output)	
Supply Voltage	Operate	Vdc	4.75 to 24
Supply Voltage	Overvoltage Protection	Vdc - max.	27
Supply Voltage	Reverse Voltage Protection	Vdc - max.	-25
Output High Voltage		Vdc	VDD -2 (-2 sinking output with internal pull-up)
Output Low Voltage		Vdc - max.	0.6 @ 20mA
Output Current (continuously on)		mA - max.	20
Current Consumption		mA - max.	1
Current Consumption		mA - max.	10.5
Switching Speed		kHz - max.	15
Temperature	Operate	°C	-40 to +125
Temperature	Storage	°C	-65 to +125

APPLICATION EXAMPLE - Geartooth Sensor




CUSTOMER OPTIONS - Cable Length and Termination

TABLE 1	
Cable Length:- (Cable Type 20AWG Type TXL per SAE J-1128)	
Standard Lengths	
SELECT OPTION	CABLE LENGTH (in) mm
01	(3.94) 100
02	(11.81) 300
03	(19.69) 500
04	(29.53) 750
05	(39.37) 1000

TABLE 2		
Termination Options:-		
SELECT OPTION	DESCRIPTION	
A	Tinned Leads	
B	Deutsch DTM04-3P	
C	Molex MX 150	

ORDERING INFORMATION

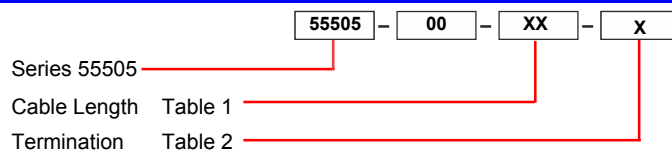

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin Europe Tel: +44 (0)1603 257700 • Fax: +44 (0)1603 257702 • Email: sales.uk@hamlin.com
Hamlin China Tel: +86 (0) 512 69365 800 • Fax: +86 (0) 512 69365 811 • Email: sales.cn@hamlin.com