

SAW Components

Data Sheet B3835





Features

- Low-loss RF filter for iDEN mobile telephone, transmit path
- Low amplitude ripple
- No matching network required for operation at 50 Ω
- Ceramic Package for Surface Mounted Technology (SMT)

06 .8 3.0


Terminals

Gold-plated Ni

Dimensions in mm, approx. weight 0,037g

Pin configuration

2	Input	
5	Output	
1, 3, 4, 6	Case ground	



Туре	Ordering code	Marking and Package according to	Packing according to
B3835	B39901-B3835-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	Т	- 20 / + 70	°C	
Storage temperature range	T _{stg}	- 40 / + 85	°C	
DC voltage	V _{DC}	0	V	
Input power max.	PIN	7	dBm	source impedance 50 Ω
				continuous wave



SAW Components					B3835
Low-Loss Filter for Mobile Communication				899,0	0 MHz
Data Sheet 🔤 🖬					
Characteristics					
	= 25 ± = 50 Ω = 50 Ω	-			
		min.	typ.	max.	
Center frequency	f _c	—	899,00	—	MHz
Maximum insertion attenuation 896,000 902,000 MHz	α_{max}	_	2,4	3,0	dB
Amplitude ripple (p-p) 896,000 902,000 MHz	Δα	_	0,5	1,0	dB
Group delay ripple (p-p) 896,000 902,000 MHz	Δτ	_	10	50	ns
Attenuation 851,000 870,000 MHz 935,000 940,000 MHz 1050,650 1055,650MHz 1205,300 1210,300MHz 1359,9501364,950MHz 1792,0001802,000 MHz 1802,0003000,000 MHz		42 43 42 40 35 25 15	48 46 54 50 46 42 36	 	dB dB dB dB dB dB dB
Input return loss 896,000 902,000 MHz		10	16	_	dB
Output return loss 896,000 902,000 MHz		10	15	_	dB




SAW Components					B3835
Low-Loss Filter for Mobile Communication			899,0	0 MHz	
Data Sheet					
Characteristics					
	= -20 to = 50 Ω = 50 Ω				
		min.	typ.	max.	
Center frequency	f _c	—	899,00	—	MHz
Maximum insertion attenuation 896,000 902,000 MHz	α_{max}	_	2,7	3,7	dB
Amplitude ripple (p-p) 896,000 902,000 MHz	Δα	_	0,8	1,2	dB
Group delay ripple (p-p) 896,000 902,000 MHz	Δτ	_	10	50	ns
Attenuation 851,000 870,000 MHz 935,000 940,000 MHz 1050,650 1055,650 MHz 1205,300 1210,300 MHz 1359,9501364,950 MHz 1792,0001802,000 MHz 1802,0003000,000 MHz		42 43 42 40 35 25 15	46 46 54 50 46 42 36	 	dB dB dB dB dB dB dB
Input return loss 896,000 902,000 MHz		10	16	_	dB
Output return loss 896,000 902,000 MHz		10	15	_	dB




SAW Components		B3835
Low-Loss Filter for Mob	ile Communication	899,00 MHz
Data Sheet		

Transfer function (25+/-2 °C)

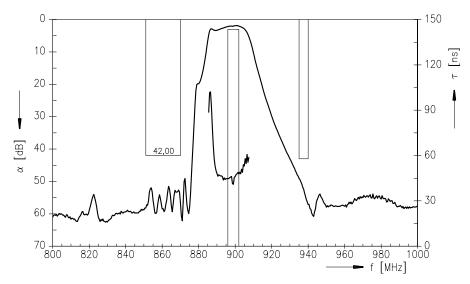

Transfer function (25+/-2 °C, Wideband)

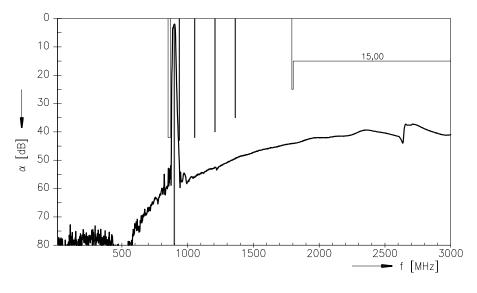



SAW Components		B3835
Low-Loss Filter for Mob	ile Communication	899,00 MHz
Data Sheet		

Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC WT P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.