

# HD29026A/HD29027/HD29028

Dual CCD Drivers

# HITACHI

ADE-205-001 (Z)  
1st. Edition  
Jul. 1990

## Description

HD29026A, HD29027 and HD29028 include two on-chip drivers on a single chip, making it the optimal choice as a CCD driver. Operation is provided with a TTL level input, and output current of 1 A is available for both sink and source.

## Features

- High speed output rise and fall (20 ns typ) at load capacitance ( $C_L$ ) of 1000 pF
- Direct drive of input block by TTL eliminates the need for external components
- Output swing voltage of 12 V; output current of 1 A available for both sink and source
- Output wave cross point 50% typ

## Ordering Information


Product name	Supply voltage	Package
HD29026AP	12 V	300 mil 8-pin plastic DIP (DP-8)
HD29026AFP		225 mil 8-pin plastic SOP (FP-8D)
HD29027P	6 V	300 mil 8-pin plastic DIP (DP-8)
HD29027FP		225 mil 8-pin plastic SOP (FP-8D)
HD29028P	12 V	300 mil 8-pin plastic DIP (DP-8)
HD29028FP		225 mil 8-pin plastic SOP (FP-8D)

## Function Table

Input A	Output Y
H	L
L	H

Note: H: High level  
L: Low level

## Pin Arrangement



## Absolute Maximum Ratings

Item		Symbol	Rating	Unit
Supply voltage	HD29026A	$V_{CC}^{*1}$	15	V
	HD29027		10	
	HD29028		15	
Input voltage		$V_I$	7	V
Output peak current		$I_{O(peak)}$	$\pm 1$	A
Operating temperature range		$T_a$	-20 to +75	$^{\circ}\text{C}$
Storage temperature range		$T_{stg}$	-65 to +150	$^{\circ}\text{C}$
Junction temperature		$T_j$	150	$^{\circ}\text{C}$
Total dissipation		$P_T^{*2}$	1	W
			DP-8	
			FP-8D	0.735

Notes: 1. If no value is specified, the voltage is defined by the GND pin.

2. Value when  $T_a = 25^{\circ}\text{C}$ . Heat dissipation is required for large-capacitance, high-frequency drivers, so derating of 8 mW/ $^{\circ}\text{C}$  (DP-8) and 5.9 mW/ $^{\circ}\text{C}$  (FP-8D) are required.

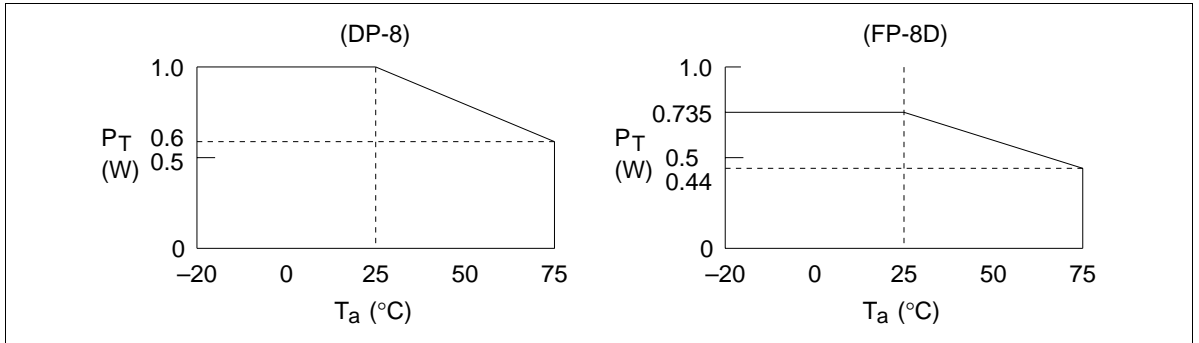


Figure 1 Package Derating Curves


**Recommended Operating Conditions**

<b>Item</b>		<b>Symbol</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Supply voltage	HD29026A	$V_{CC}$	8	12	13	V
	HD29027	$V_{CC}$	4.5	6	8	
	HD29028	$V_{CC}$	8	9	13	
Operating temperature		$T_a$	-20	25	75	°C


---

**Recommended Operating Frequency Area**


**HD29026A**

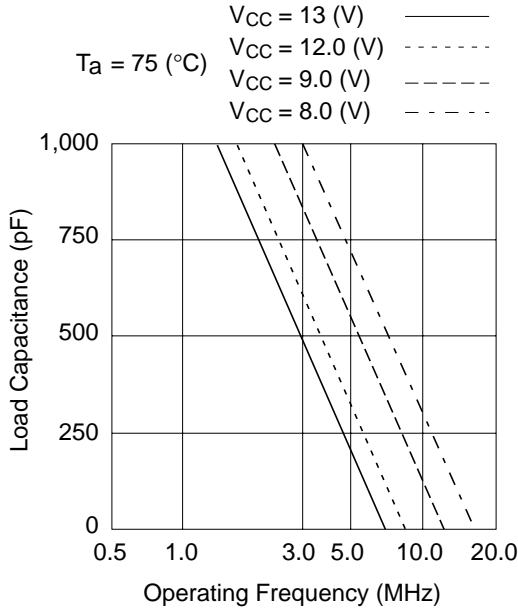

**HD29027**

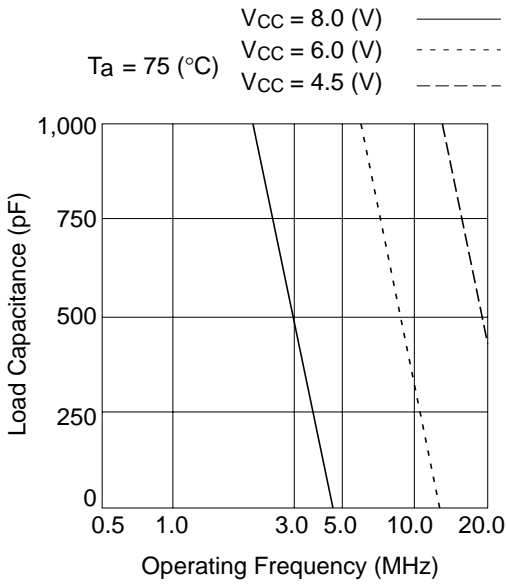

**HD29028**

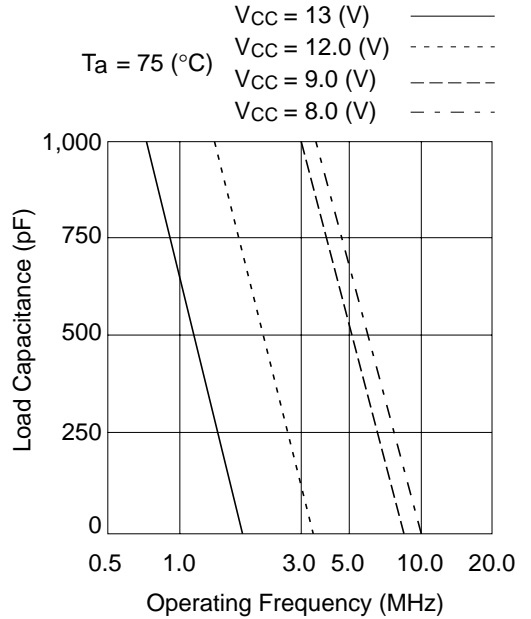

**Electrical Characteristics** (Ta = -20 to +75°C)

Item		Symbol	Min	Typ	Max	Unit	Test Conditions
Input voltage		$V_{IH}$	2.0	—	—	V	
		$V_{IL}$	—	—	0.6		
Output voltage		$V_{OH}$	$V_{CC}-1$	—	—	V	$V_{IL} = 0.6\text{ V}, I_{OH} = -1\text{ mA}$
		$V_{OL}$	—	—	0.5		$V_{IH} = 2.0\text{ V}, I_{OL} = 1\text{ mA}$
Input current		$I_{IH}$	—	—	20	$\mu\text{A}$	$V_I = 2.7\text{ V}$
	HD29026A/28	$I_{IL}$	—	—	-100		$V_I = 0.4\text{ V}$
	HD29027		—	—	-200		
Supply current	HD29026A	$I_{CCH}$	—	—	12	mA	
	HD29027		—	—	20		
	HD29028		—	—	15		
	HD29026A	$I_{CCL}$	—	—	20		
	HD29027		—	—	30		
	HD29028		—	—	25		
Input current		$I_I$	—	—	100	$\mu\text{A}$	$V_I = 7\text{ V}$
Input clamp voltage		$V_{IK}$	—	—	-1.5	V	$I_{IN} = -18\text{ mA}$

 Note: HD29026A/28:  $V_{CC} = 8\text{ to }13\text{ V}$ 

 HD29027:  $V_{CC} = 4.5\text{ to }8\text{ V}$ 
**Switching Characteristics** (Ta = 25°C)


Item		Symbol	Min	Typ	Max	Unit	Test Conditions	
Fall propagation delay time	HD29026A	$t_{PHL}$	—	16	20	ns	$C_L = 1000\text{ pF}$	$V_{CC} = 8\text{ V}$
			—	11	15			$V_{CC} = 12\text{ V}$
	HD29027		—	10	15			$V_{CC} = 6\text{ V}$
	HD29028		—	10	15			$V_{CC} = 9\text{ V}$
			—	8	13		$V_{CC} = 12\text{ V}$	
Rise propagation delay time	HD29026A	$t_{PLH}$	—	18	25	ns	$C_L = 1000\text{ pF}$	$V_{CC} = 8\text{ V}$
			—	13	20			$V_{CC} = 12\text{ V}$
	HD29027		—	10	15			$V_{CC} = 6\text{ V}$
	HD29028		—	10	15			$V_{CC} = 9\text{ V}$
			—	8	13		$V_{CC} = 12\text{ V}$	

**Switching Characteristics (Ta = 25°C) (cont)**


Item	Symbol	Min	Typ	Max	Unit	Test Conditions			
Fall (transition) time	HD29026A	$t_{THL}$	—	17	21	ns	$C_L = 250 \text{ pF}$	$V_{CC} = 8 \text{ V}$	
			—	12	16			$V_{CC} = 12 \text{ V}$	
	HD29027		—	9	14			$V_{CC} = 6 \text{ V}$	
			—	9	13			$V_{CC} = 9 \text{ V}$	
	HD29028		—	7	14			$V_{CC} = 12 \text{ V}$	
			—	20	23			$CL = 500 \text{ pF}$	$V_{CC} = 8 \text{ V}$
	HD29026A		—	15	18				$V_{CC} = 12 \text{ V}$
			—	12	17			$V_{CC} = 6 \text{ V}$	
	HD29027		—	12	17			$V_{CC} = 9 \text{ V}$	
			—	10	15			$V_{CC} = 12 \text{ V}$	
	HD29028		—	25	40			$C_L = 1000 \text{ pF}$	$V_{CC} = 8 \text{ V}$
			—	20	35				$V_{CC} = 12 \text{ V}$
	HD29026A		—	20	25				$V_{CC} = 6 \text{ V}$
			—	20	25				$V_{CC} = 9 \text{ V}$
	HD29027		—	18	23				$V_{CC} = 12 \text{ V}$
			—	15	20				ns
	HD29028		—	10	15				
			—	9	14				$V_{CC} = 6 \text{ V}$
Rise (transition) time	HD29026A	$t_{TLH}$	—	15	20				$V_{CC} = 9 \text{ V}$
			—	7	12				$V_{CC} = 12 \text{ V}$
HD29027			—	9	14				$V_{CC} = 6 \text{ V}$
			—	9	14				$V_{CC} = 9 \text{ V}$
HD29028			—	21	25				$V_{CC} = 8 \text{ V}$
			—	16	20				$V_{CC} = 12 \text{ V}$
HD29026A			—	12	17				$V_{CC} = 6 \text{ V}$
			—	12	17				$V_{CC} = 9 \text{ V}$
HD29027			—	10	15				$V_{CC} = 12 \text{ V}$
			—	22	30				$C_L = 500 \text{ pF}$
HD29028			—	17	25				
			—	20	25				$V_{CC} = 6 \text{ V}$
HD29026A			—	20	25				$V_{CC} = 9 \text{ V}$
			—	18	23				$V_{CC} = 12 \text{ V}$
HD29027			—	20	25				$V_{CC} = 6 \text{ V}$
			—	20	25				$V_{CC} = 9 \text{ V}$
HD29028			—	17	25				$V_{CC} = 8 \text{ V}$
			—	17	25				$V_{CC} = 12 \text{ V}$
HD29026A			—	20	25				$V_{CC} = 6 \text{ V}$
			—	20	25				$V_{CC} = 9 \text{ V}$
HD29027			—	18	23				$V_{CC} = 12 \text{ V}$
			—	18	23				$V_{CC} = 12 \text{ V}$

## Switching Time Test Method

### Test circuit

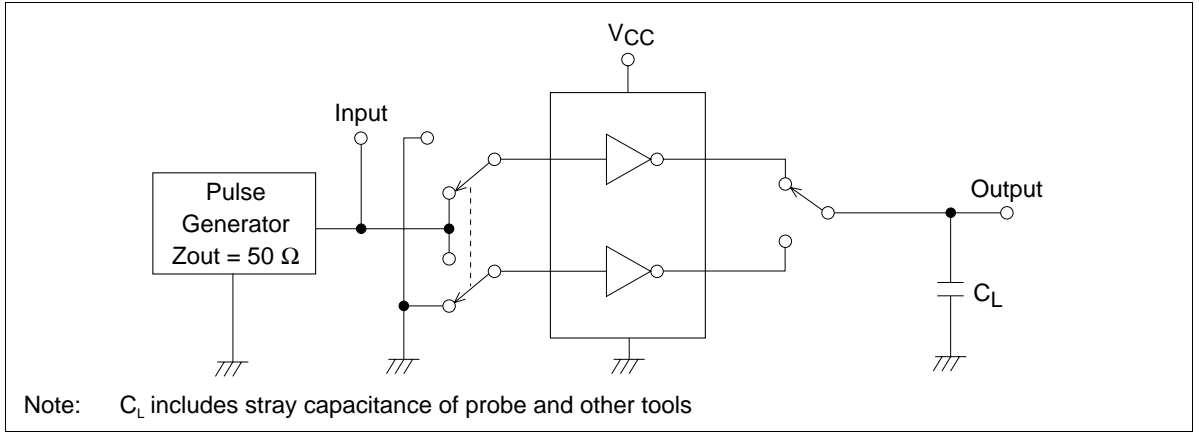

### Waveforms

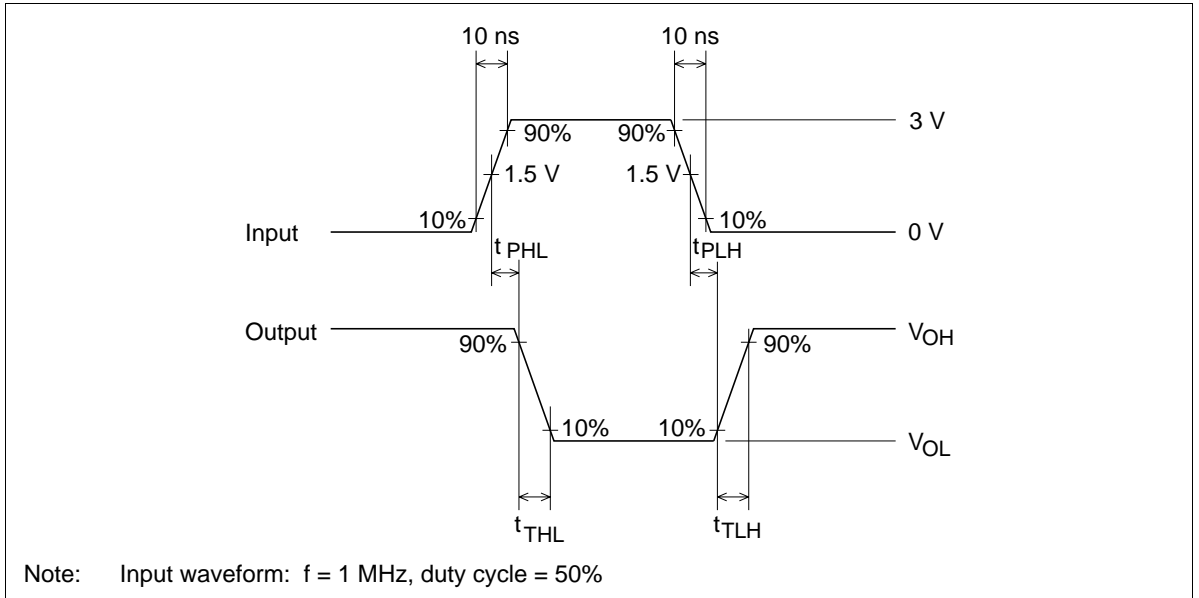


## Output Timing Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Output wave cross point	$V_X$	30	50	70	%	$C_L = 250 \text{ pF}$
		30	50	70		$C_L = 500 \text{ pF}$
		30	50	70		$C_L = 1000 \text{ pF}$

HD29027;  $V_{CC} = 6 \text{ V}$ , HD29028;  $V_{CC} = 9, 12 \text{ V}$


## Output Timing Characteristics Test Method (HD29027/28)

### Test circuit

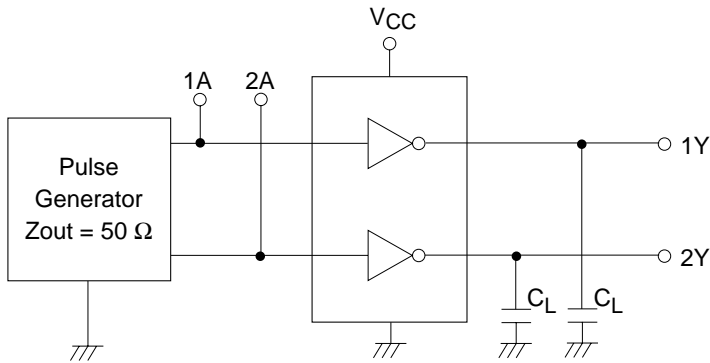

Note:  $C_L$  includes stray capacitance of probe and other tools

### Waveform

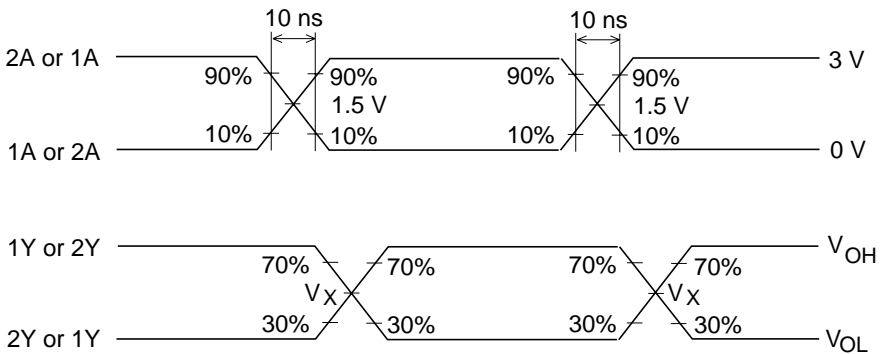


Note: Input waveform:  $f = 1 \text{ MHz}$ , duty cycle = 50%





## Output Timing Characteristics

HD29027




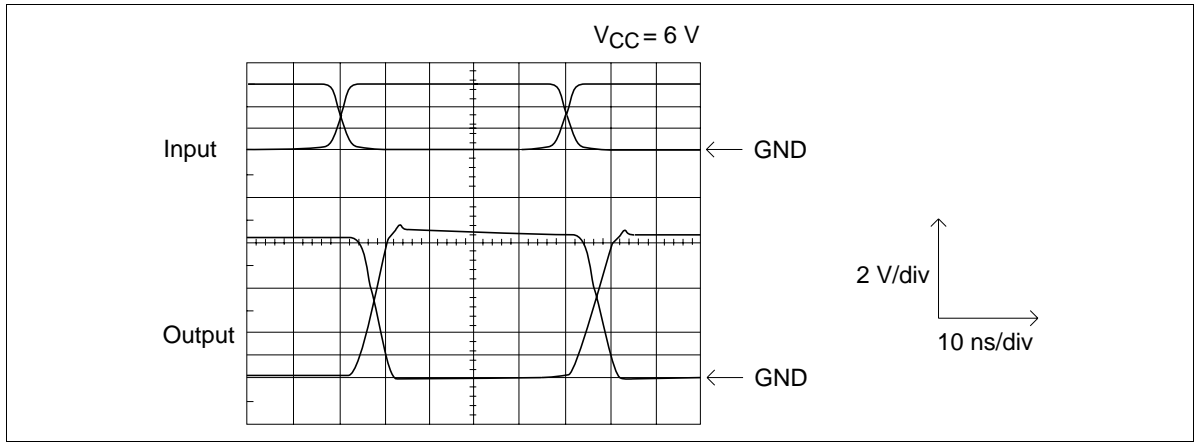


HD29028

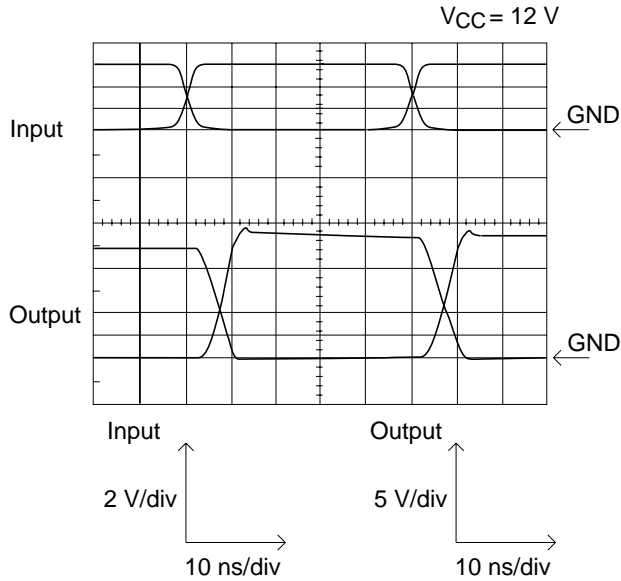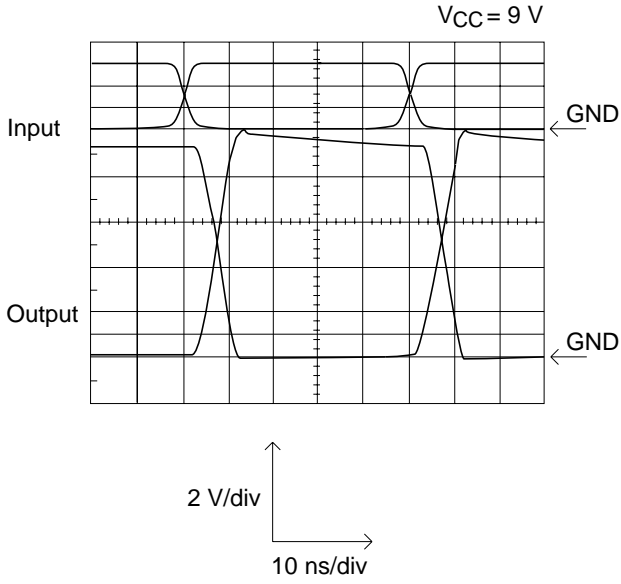


Typical Characteristic Curves


Supply current vs. operating frequency (HD29026A)

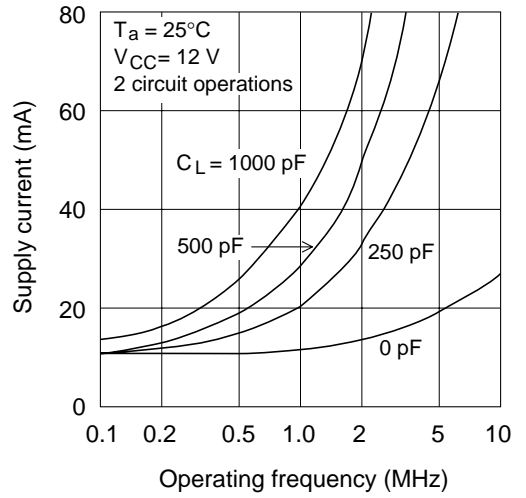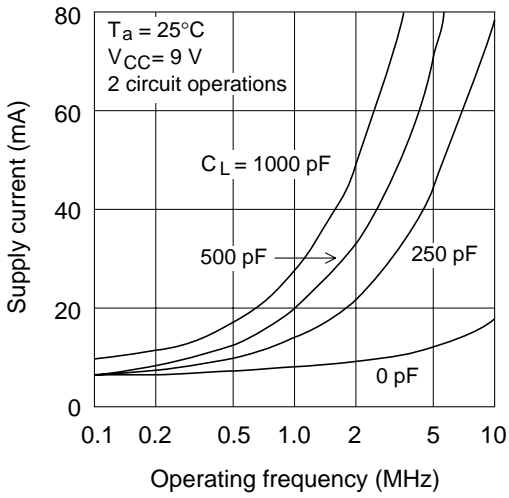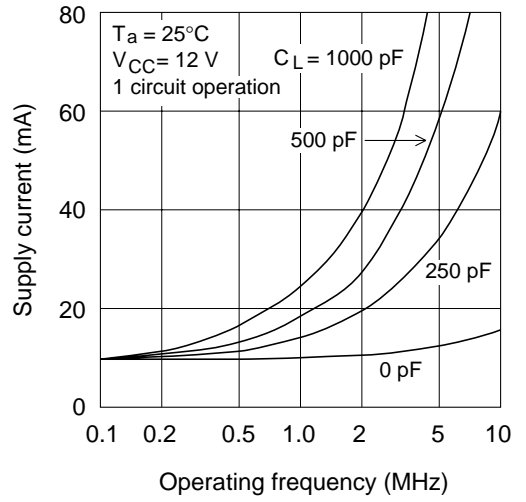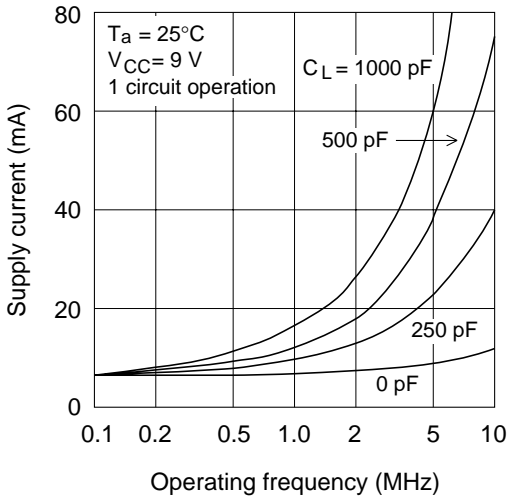


**Supply current vs. operating frequency (HD29027)**

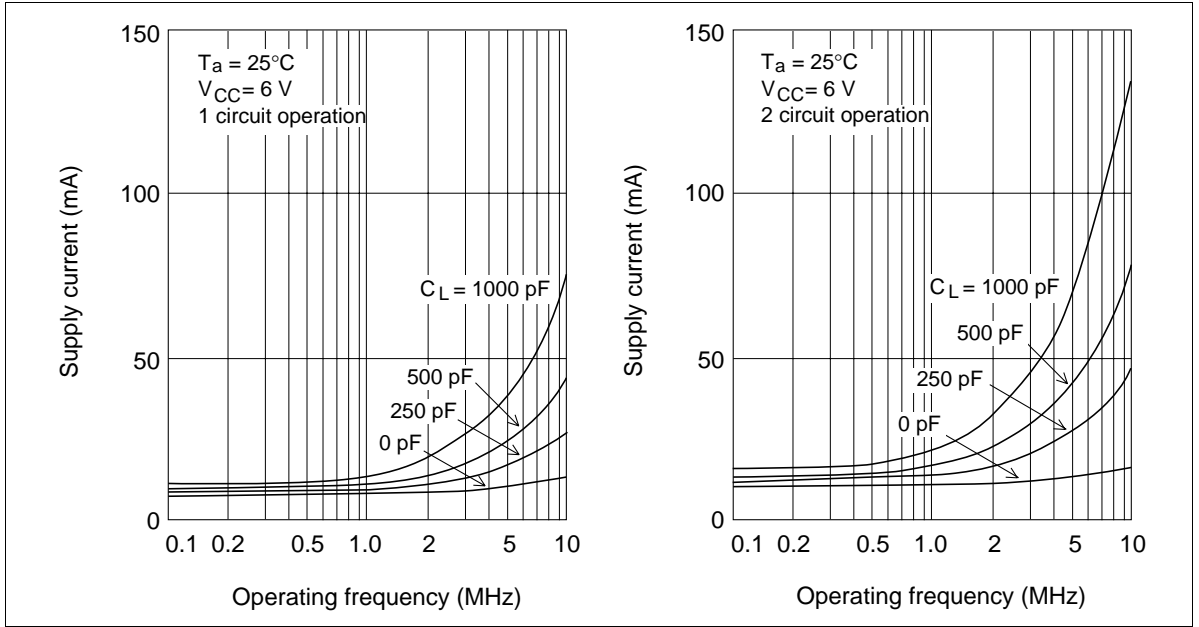

**Supply current vs. operating frequency (HD29028)**

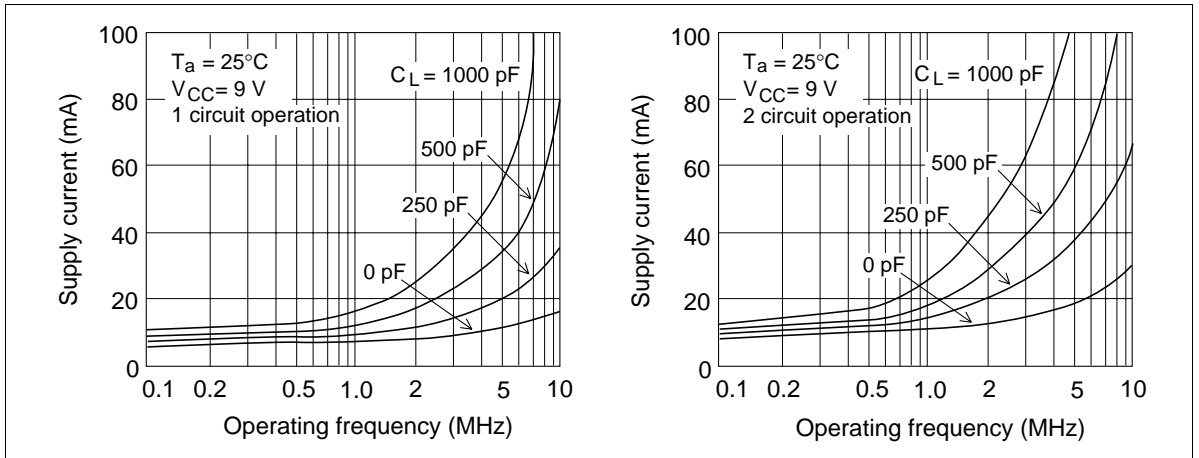


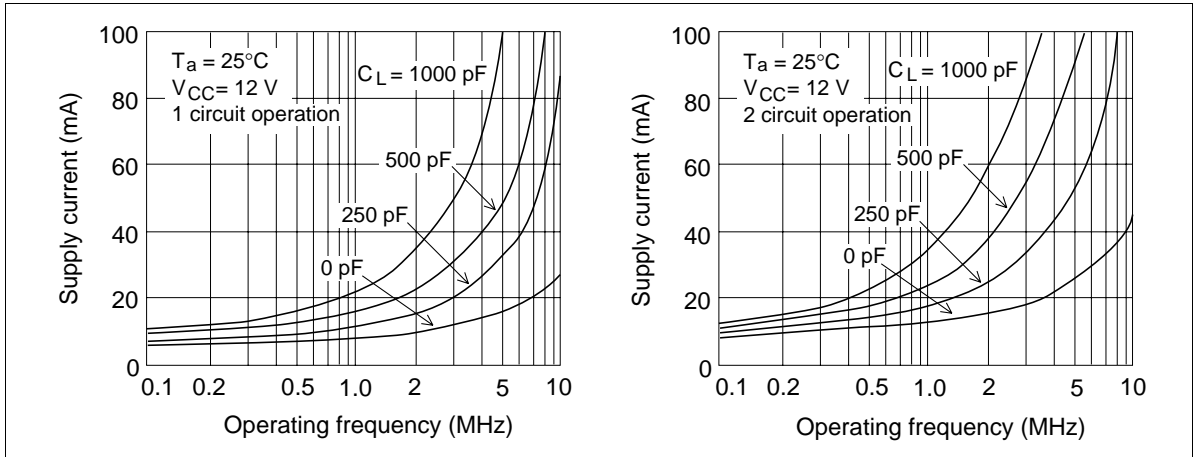

**Cautions (HD29026A only)**


The short output rise and fall time, as well as the large output amplitude of this product tends to generate overshooting and undershooting. The connection of 5 to 15 damping resistance ( $R_D$ ) to the output as illustrated in figure 2 serves to

increase the output rise and fall time, making it possible to reduce the chance of overshooting and undershooting. Figure 3 shows the characteristics that result for a damping resistance ( $R_D$ ) of 10 .

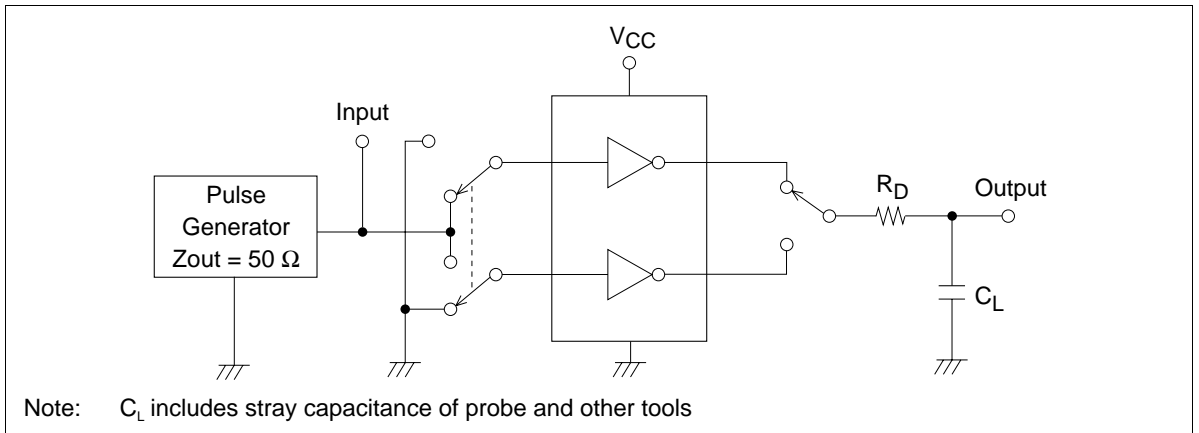

**Figure 2**

$t_{TLH}$  vs  $C_L$

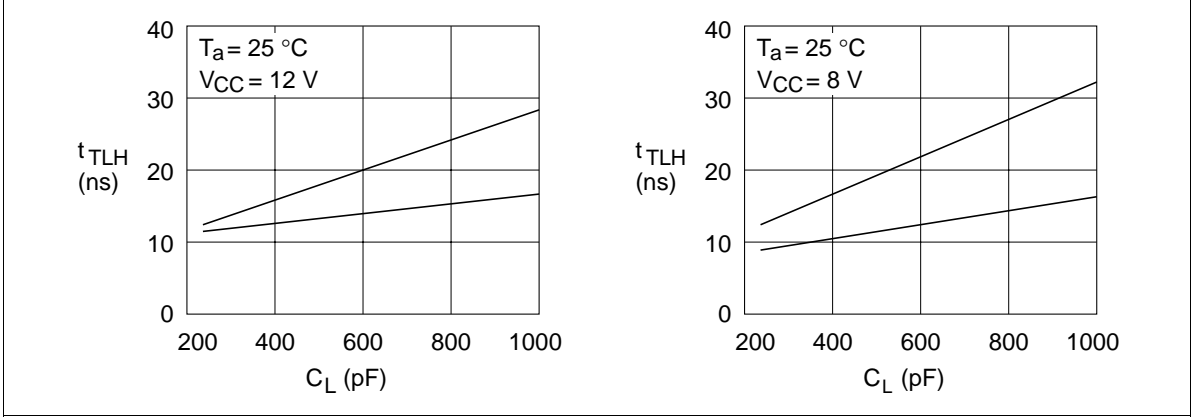

$t_{THL}$  vs  $C_L$



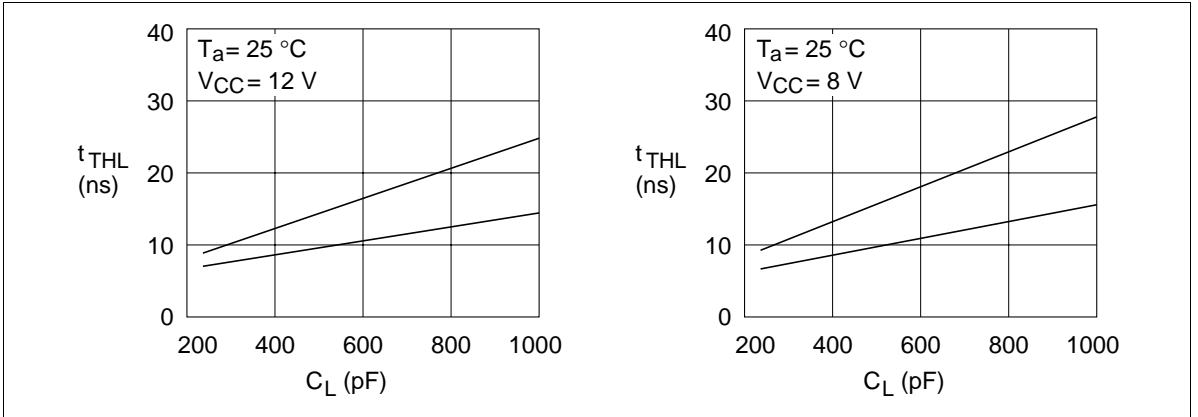


Figure 3



Package Dimensions

Unit: mm

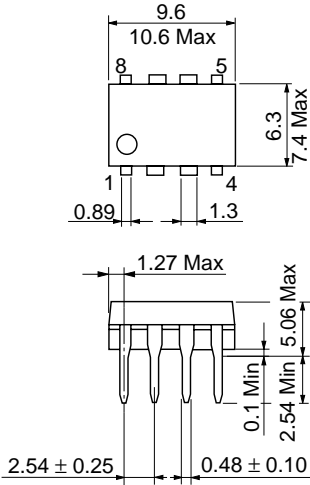

Hitachi Code	DP-8
JEDEC	Conforms
EIAJ	Conforms
Mass (reference value)	0.54 g

Unit: mm

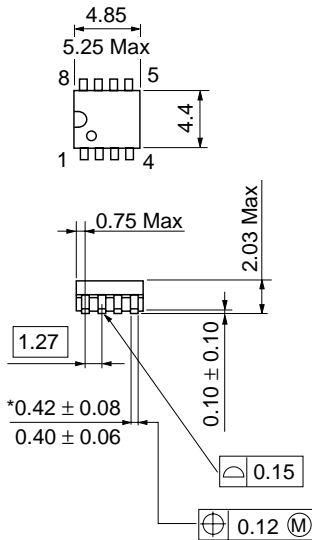

\*Dimension including the plating thickness  
Base material dimension

Hitachi Code	FP-8D
JEDEC	—
EIAJ	Conforms
Mass (reference value)	0.10 g

**Cautions**

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

# HITACHI

**Hitachi, Ltd.**

Semiconductor & Integrated Circuits.  
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan  
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: <a href="http://semiconductor.hitachi.com/">http://semiconductor.hitachi.com/</a>
	Europe	: <a href="http://www.hitachi-eu.com/hel/ecg">http://www.hitachi-eu.com/hel/ecg</a>
	Asia	: <a href="http://sicapac.hitachi-asia.com">http://sicapac.hitachi-asia.com</a>
	Japan	: <a href="http://www.hitachi.co.jp/Sicd/indx.htm">http://www.hitachi.co.jp/Sicd/indx.htm</a>

**For further information write to:**

Hitachi Semiconductor  
(America) Inc.  
179 East Tasman Drive,  
San Jose, CA 95134  
Tel: <1> (408) 433-1990  
Fax: <1>(408) 433-0223

Hitachi Europe GmbH  
Electronic Components Group  
Dornacher StraÙe 3  
D-85622 Feldkirchen, Munich  
Germany  
Tel: <49> (89) 9 9180-0  
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.  
Electronic Components Group.  
Whitebrook Park  
Lower Cookham Road  
Maidenhead  
Berkshire SL6 8YA, United Kingdom  
Tel: <44> (1628) 585000  
Fax: <44> (1628) 585160

Hitachi Asia Ltd.  
Hitachi Tower  
16 Collyer Quay #20-00,  
Singapore 049318  
Tel: <65>-538-6533/538-8577  
Fax: <65>-538-6933/538-3877  
URL : <http://www.hitachi.com.sg>

Hitachi Asia Ltd.  
(Taipei Branch Office)  
4/F, No. 167, Tun Hwa North Road,  
Hung-Kuo Building,  
Taipei (105), Taiwan  
Tel: <886>-(2)-2718-3666  
Fax : <886>-(2)-2718-8180  
Telex : 23222 HAS-TP  
URL : <http://www.hitachi.com.tw>

Hitachi Asia (Hong Kong) Ltd.  
Group III (Electronic Components)  
7/F., North Tower,  
World Finance Centre,  
Harbour City, Canton Road  
Tsim Sha Tsui, Kowloon,  
Hong Kong  
Tel : <852>-(2)-735-9218  
Fax : <852>-(2)-730-0281  
URL : <http://www.hitachi.com.hk>

Copyright © Hitachi, Ltd., 2000. All rights reserved. Printed in Japan.  
Colophon 2.0

**HITACHI**