

Shantou Huashan Electronic Devices Co.,Ltd.

PNP DARLINGTON TRANSISTOR

# HP107


## ■ APPLICATIONS

High Voltage switching.Motor driving.

## ■ ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

$T_{stg}$	Storage Temperature	-55~150°C
$T_j$	Junction Temperature	150°C
$P_c$	Collector Dissipation ( $T_c=25^\circ\text{C}$ )	80W
$P_c$	Collector Dissipation ( $T_a=25^\circ\text{C}$ )	2W
$V_{CBO}$	Collector-Base Voltage	-100V
$V_{CEO}$	Collector-Emitter Voltage	-100V
$V_{EBO}$	Emitter-Base Voltage	-5V
$I_c$	Collector Current (DC)	-8A
$I_c$	Collector Current (Pulse)	-15A
$I_B$	Base Current(DC)	-1A


TO-220



- 1—Base, B
- 2—Collector, C
- 3—Emitter, E

## ■ ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

Symbol	Characteristics	Min	Typ	Max	Unit	Test Conditions
$BV_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	-100			V	$I_C=-30\text{mA}, I_B=0$
$I_{CEO}$	Collector Cutoff Current			-50	$\mu\text{A}$	$V_{CE}=-50\text{V}, I_B=0$
$I_{CBO}$	Collector Cutoff Current			-50	$\mu\text{A}$	$V_{CB}=-100\text{V}, I_E=0$
$I_{EBO}$	Emitter-Base Cutoff Current			-2	mA	$V_{EB}=-5\text{V}, I_C=0$
$HFE (1)$	DC Current Gain	1000	20000			$V_{CE}=-4\text{V}, I_C=-3\text{A}$
$HFE (2)$		200				$V_{CE}=-4\text{V}, I_C=-8\text{A}$
$V_{CE(sat1)}$	Collector- Emitter Saturation Voltage			-2	V	$I_C=-3\text{A}, I_B=-6\text{mA}$
$V_{CE(sat2)}$				-2. 5	V	$I_C=-8\text{A}, I_B=-80\text{mA}$
$V_{BE(on)}$	Base- Emitter On Voltage			-2. 8	V	$V_{CE}=-4\text{V}, I_C=-8\text{A}, V_{CB}=-10\text{V}, I_E=0, f=0.1\text{MHz}$
$C_{ob}$	Output Capacitance			300	pF	



Shantou Huashan Electronic Devices Co.,Ltd.

PNP DARLINGTON TRANSISTOR  
**HP107**

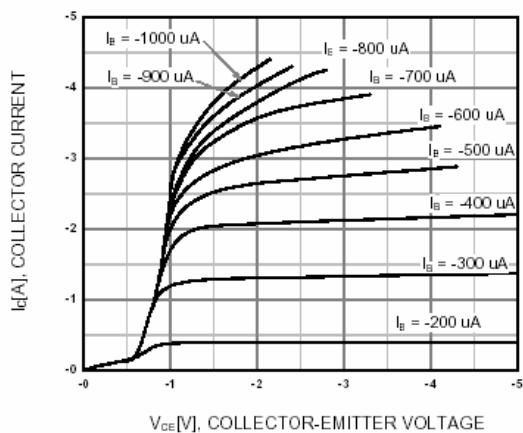


Figure 1. Static Characteristic

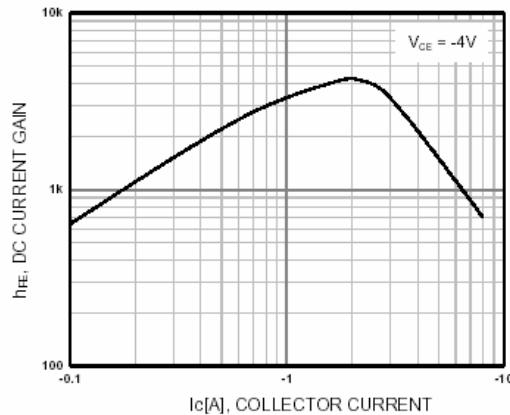


Figure 2. DC current Gain

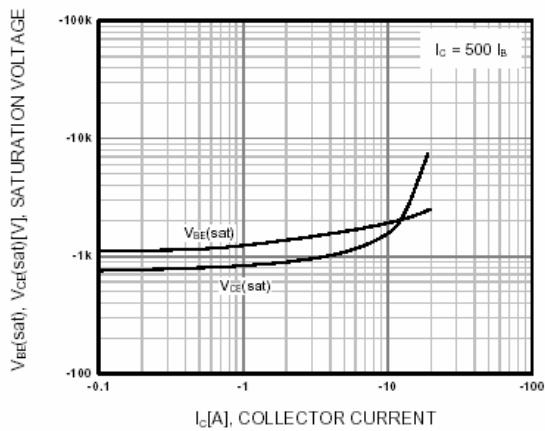


Figure 3. Collector-Emitter Saturation Voltage  
Base-Emitter Saturation Voltage

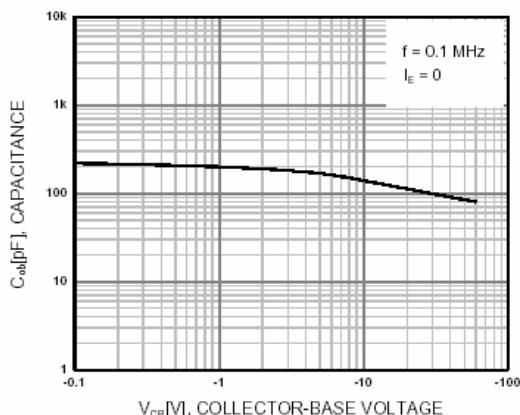


Figure 4. Collector Output Capacitance

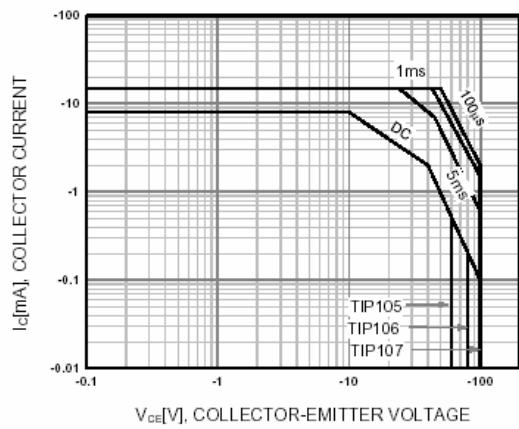


Figure 5. Safe Operating Area

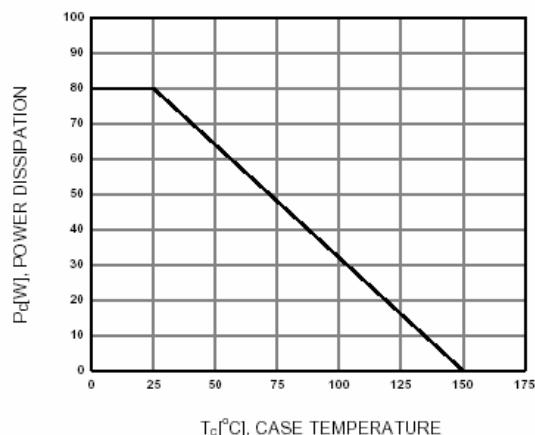


Figure 6. Power Derating