



LA7170M

RF Modulator for UHF Band (Supports SECAM)


Overview

The LA7170M is a UHF band RF modulator whose built-in RF oscillator and mixer make it a single-chip RF modulator solution. It also supports image positivity modulation and AM sound modulation for SECAM systems.

Package Dimensions

unit: mm

3036B-MFP20

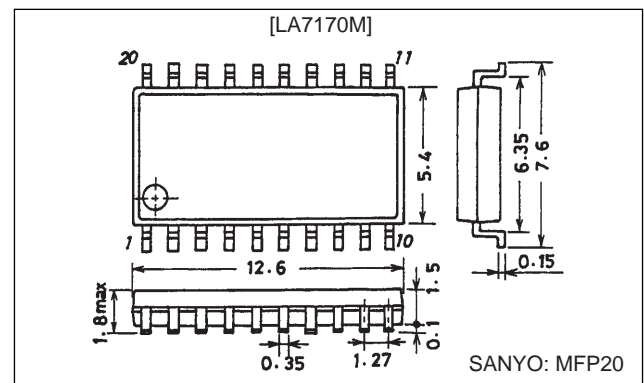

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC\ max}$		7	V
Allowable power dissipation	$P_{d\ max}$	$T_a \leq 75^\circ\text{C}$	250	mW
Operating temperature	T_{opr}		-20 to +75	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended operating voltage	V_{CC}		5.0	V
Operating supply voltage range	$V_{CC\ op}$		4.5 to 5.5	V

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{ V}$, Unless otherwise specified, $f_p = 591.25\text{ MHz}$, $f_s = 5.5\text{ MHz}$, S9: ON, S10: B, S19A: B, S19B: B

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current drain 1	I_{CC1}	With no input	24	30	36	mA
Regulator voltage	V_{req}	With no input	3.7	3.9	4.1	V
[RF Output Level] (S19A: A, S19B: A)						
Picture carrier output	P	With no input, with $50\ \Omega$ terminator	77	79.5	82	$\text{dB}\mu$
Sound carrier output ratio	P/S	Ratio of levels at f_p and f_p+f_s	12.5	15	17.5	dB
Sound second harmonic distortion	P/S2	Ratio of levels at f_p and f_p+2f_s	52	62		dB
Sound third harmonic distortion	P/S3	Ratio of levels at f_p and f_p+3f_s	58	68		dB
Chrominance beat	P/CB	Ratio of P above to chrominance beat for $V_{IN} = 0.4\text{ Vp-p}$ with 4.43-MHz sine wave input	65	75		dB
Picture harmonic distortion	P/V2	Ratio of P above to level at $f_p+2\text{ MHz}$ for $V_{IN} = 1\text{ Vp-p}$ with 1-MHz sine wave input	50	62		dB

Continued on next page.

LA7170M

Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit	
			min	typ	max		
[Picture]							
Picture modulation	mp	$V_{IN} = 1 V_{p-p}$, 100% white	73	80	87	%	
Maximum picture modulation	mp max	$V_{IN} = 1.5 V_{p-p}$, 100% white	88	93	98	%	
SYNC compression	$\Delta(S/V)$	$V_{IN} = 1 V_{p-p}$, 100% white $\{1 - (S/V)/(3/7)\} \times 100$		1.5	5	%	
Differential gain	DG	V_{IN} : 5-stair step, mp = 80%, at fourth step		2	5	%	
Differential phase	DP	V_{IN} : 5-stair step, mp = 80%, at fourth step	-6	0	+6	deg	
SECAM picture modulation	mp SCM	$V_{IN} = 1 V_{p-p}$, 100% white S10 : a	88	93	98	%	
TSG picture modulation	mp TSG	S9 : off	70	80	90	%	
TSG SV ratio	V/S	S9 : off	6.3/3.7	6.8/3.2	7.3/2.7		
TSG horizontal period	TS	S9 : off	63.7	64.0	64.3	μs	
TSG synchronization pulse width	HS	S9 : off	3.6	4.0	4.4	μs	
TSG white signal width	HV	S9 : off	3.6	4.0	4.4	μs	
TSG first white rising edge	TV1	S9 : off	22	24	26	μs	
TSG second white rising edge	TV2	S9 : off	38	40	42	μs	
[Sound]							
FM sound modulation	Rank A	ms FM	$A_{IN} = 1.66 V_{p-p}$ with 1-kHz sine wave input; 100% modulation: ± 50 kHz; S10: b Note: $A_{IN} = 1 V_{p-p}$ normally produces 60% modulation.	73	81	89	%
	Rank B			81	90	99	%
	Rank C			90	100	110	%
	Rank D			99	110	121	%
	Rank E			109	121	133	%
Interchannel FM sound modulation ratio	Δ ms FM	ms FM ratio with S10: off	0.93	0.98	1.03		
FM sound distortion	THD FM	S10: b/off; $A_{IN} = 1 V_{p-p}$ with 1-kHz sine wave input		0.3	1.0	%	
FM sound signal-to-noise ratio	S/NFM	S10: b/off; $V_{IN} = 1 V_{p-p}$ color bar; A_{IN} with 1-kHz sine wave input; ratio of level at $A_{IN} = 1 V_{p-p}$ to that at $A_{IN} = 0 V_{p-p}$	43	55		dB	
Maximum FM modulation	ms max	Maximum modulation possible with S10: b/off and sound distortion ratio within 3%	400			%	
AM sound modulation	ms AM	S10: a; $A_{IN} = 1 V_{p-p}$ with 1-kHz sine wave input	43	50	57	%	
AM sound distortion ratio	THD AM	S10: a; $A_{IN} = 1 V_{p-p}$ with 1-kHz sine wave input		0.5	2	%	
AM sound signal-to-noise ratio	S/N AM	S10: a; $V_{IN} = 1 V_{p-p}$ color bar; A_{IN} with 1-kHz sine wave input; ratio of level at $A_{IN} = 1 V_{p-p}$ to that at $A_{IN} = 0 V_{p-p}$	42	47		dB	

Note: The AM sound items refer to direct AM detection from the sound carrier (fp + sound intercarrier). This device requires the special care associated with all high-frequency devices.

LA7170M

Pin Functions

Pin No.	Symbol	Pin Voltage	Pin Description	Equivalent Circuit
1	V _{CC1}	5.0	V _{CC} for baseband circuits	
2 3	TANK1 TANK2	3.9	Connect tank circuits between these pins and the REG pin.	<p style="text-align: right;">A07247</p>
4	REG	3.9	Regulator output	<p style="text-align: right;">A07248</p>
5	FM AUDIO IN	0	FM sound input	<p style="text-align: right;">A07249</p>
6	AM AUDIO IN	0	AM sound input	<p style="text-align: right;">A07250</p>
7	GND1	0	Ground for baseband circuits	
8	VIDEO IN	3.0	Picture input. Clamp at SYNC tip.	<p style="text-align: right;">A07251</p>
9	RES	2.6 (open)	Ground this pin through a 500-kHz oscillator. Open : TSG ON GND : TSG OFF	<p style="text-align: right;">A07252</p>

Continued on next page.


LA7170M

Continued from preceding page.

Pin No.	Symbol	Pin Voltage	Pin Description	Equivalent Circuit
10	FoCTL	2.6 (open)	L (0 to 1.5 V) : PAL-TANK1 M (2.1 to 3.2 V) : PAL-TANK2 H (3.8 to 5.0 V) : SECAM-TANK2	
11 12 13 14	OSC-B1 OSC-E1 OSC-E2 OSC-B2	2.5 1.8 1.8 2.5	This circuit forms a Colpitts oscillator.	
15	GND2	0	Ground for RF oscillator	
16	V _{CC} 2	5.0	V _{CC} for RF oscillator	
17	GND3	0	V _{CC} for RF mixer	
18	P/S	1.7	Grounding this pin through a capacitor or resistor attenuates the sound intercarrier level.	
19	RF OUT	3.0	RF mixer signal output	
20	V _{CC} 3	5.0	V _{CC} for RF mixer	

LA7170M


Block Diagram

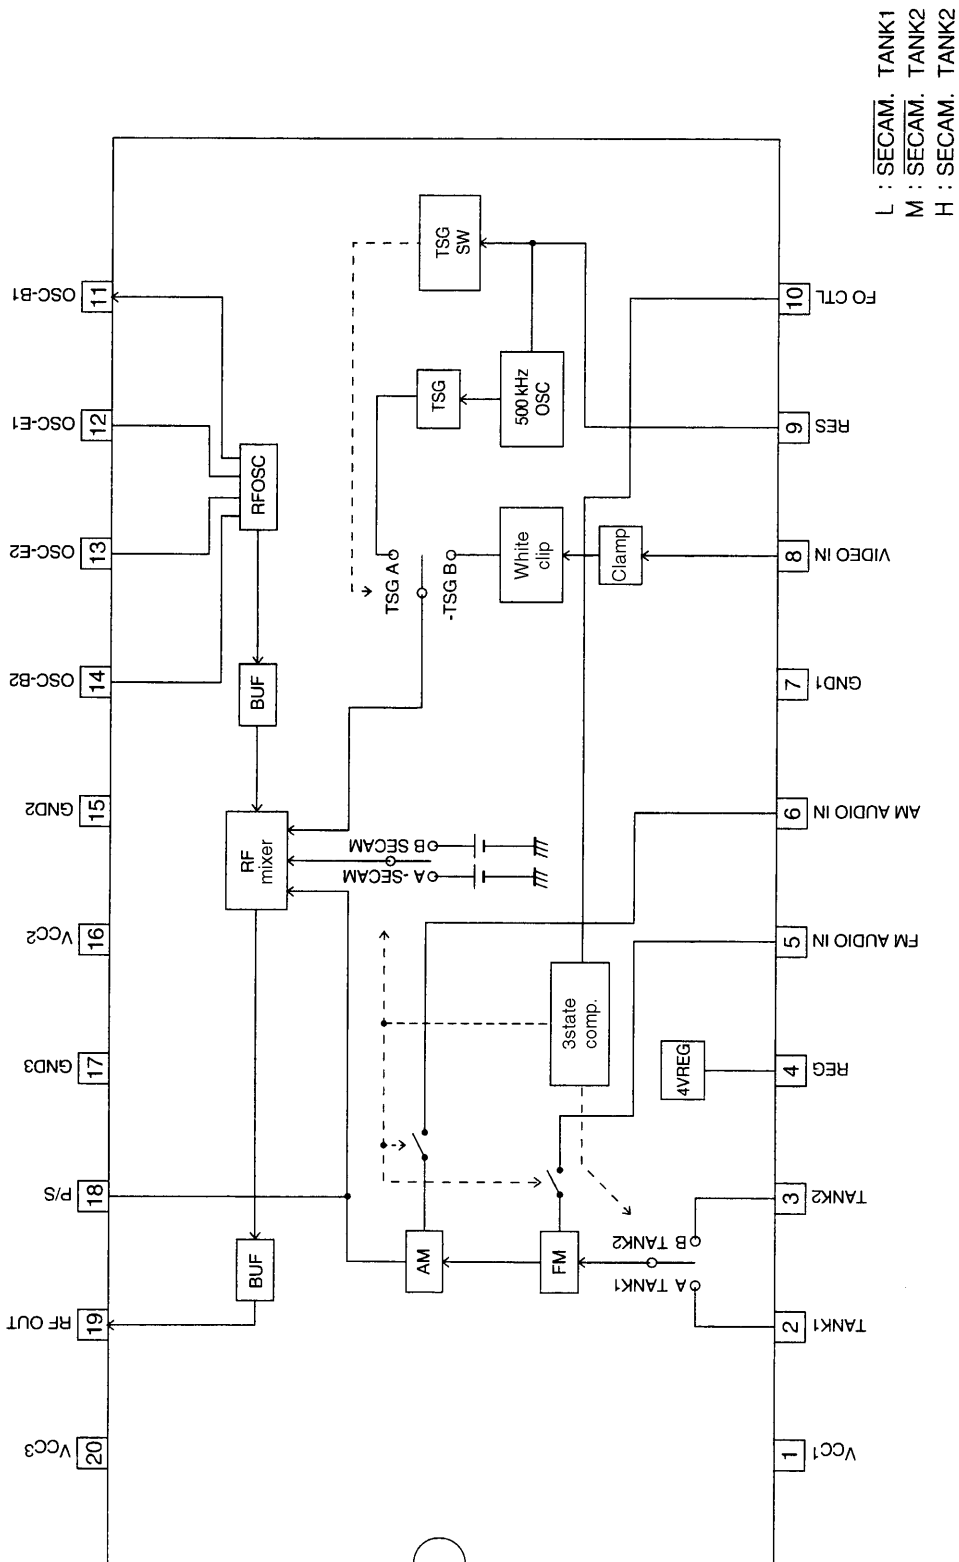

A07259

LA7170M



Test Circuit

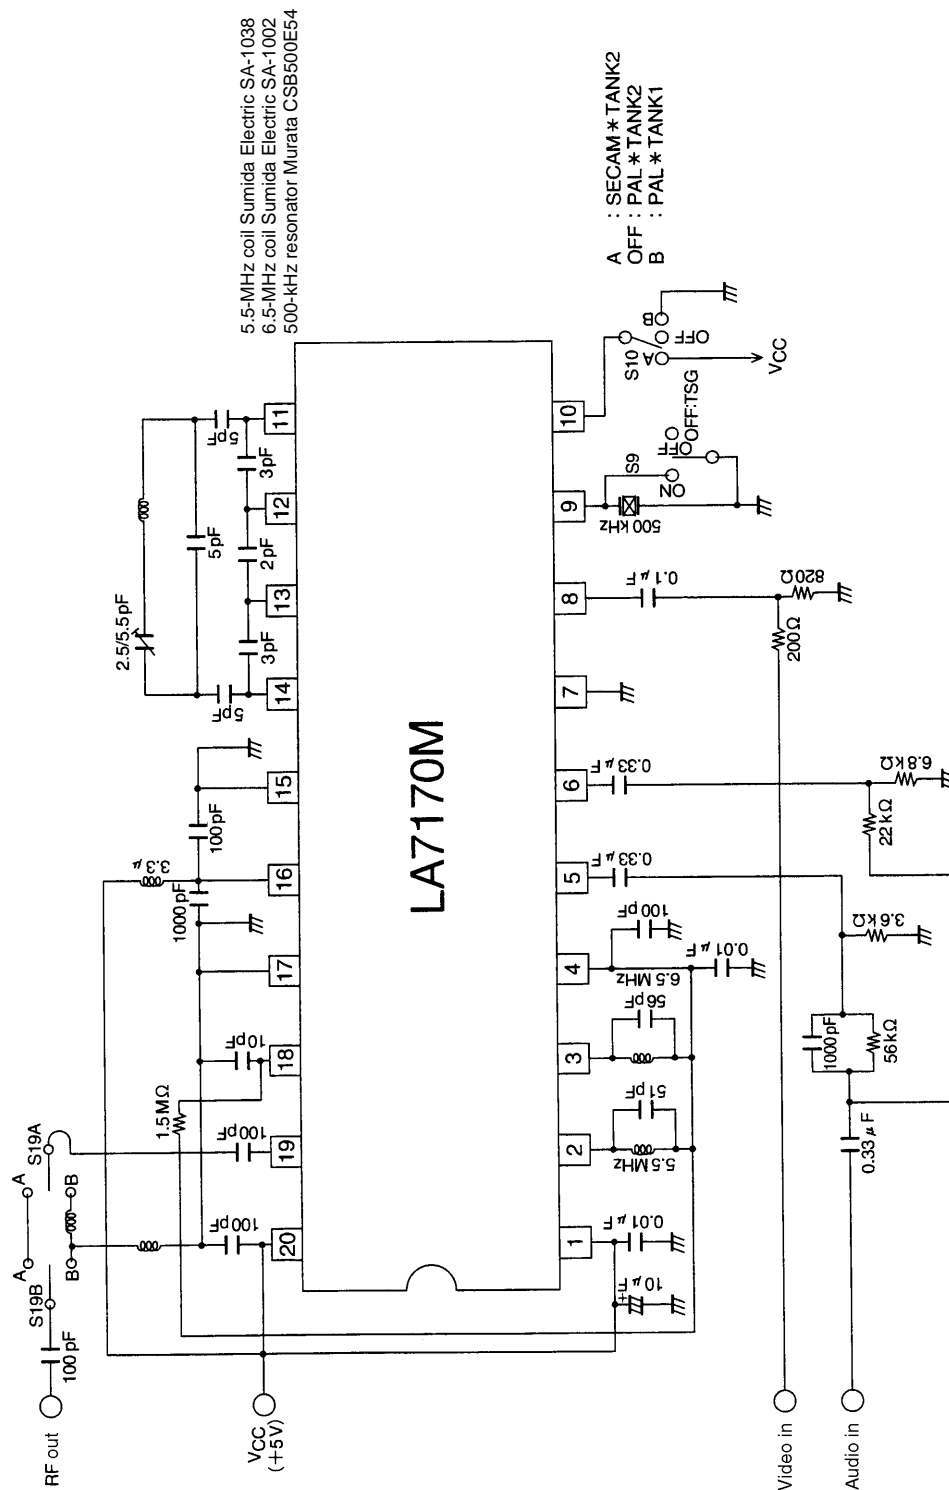

A07257

LA7170M

Sample Application Circuit

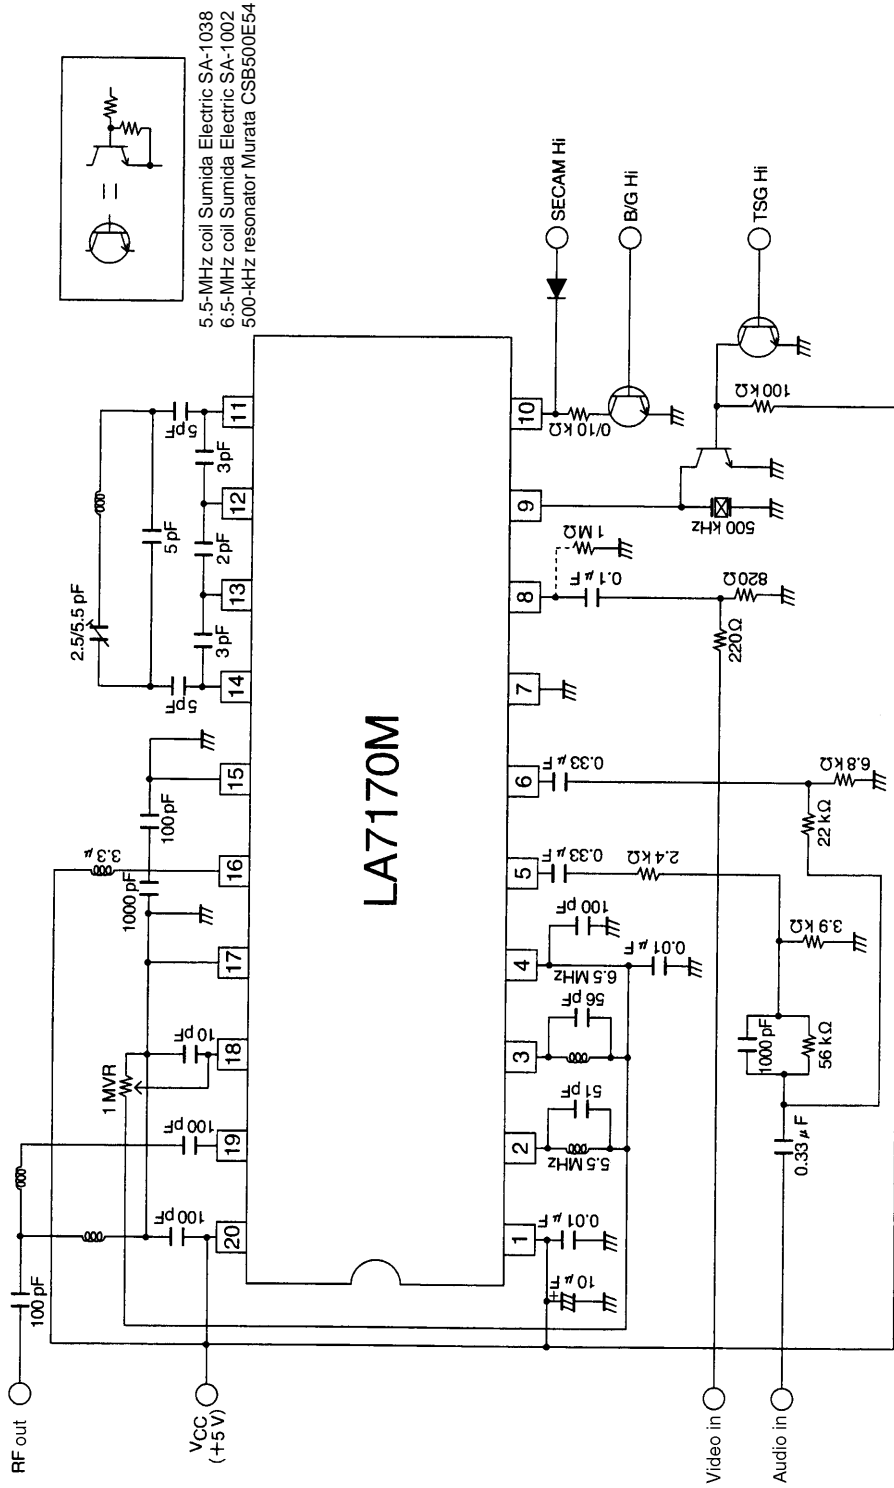

- 5.5-MHz coil Sumida Electric SA-1038
- 6.5-MHz coil Sumida Electric SA-1002
- 500-kHz resonator Murata CSB500E54

A07258

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 1998. Specifications and information herein are subject to change without notice.