

**Low Cost MMIC Mixer with Local Oscillator Amplifier  
0.8 GHz - 1.0 GHz**

**MAMX-008611  
V1**

**Features**

- -5 to +5 dBm LO Drive Level
- High Isolation, 28 dB LO to RF
- Lead Free SOT-26 package
- 100% Matte Tin Plating over Copper
- Halogen-Free “Green” Mold Compound
- 260°C Re-flow Compatible
- RoHS Compliant Version of MD57-0001

**Description**

The MAMX-008611 is a floating FET mixer with an on-chip LO amplifier. The LO drive for the MAMX-008611 can range from -5 to +5 dBm without severely impacting the mixer’s performance. The MAMX-008611 is ideally suited for cellular band communications handsets’ that can provide only minimal amounts of LO drive. Typical applications include frequency up/down conversion and IQ modulation and demodulation in digital receivers and transmitters.

The MAMX-008611 utilizes a patented “floating-FET” architecture. The on-chip LO amplifier allows the MAMX-008611 to operate with as little as -5 dBm of LO drive making it an ideal choice for low power portable designs.


The MAMX-008611 is fabricated using M/A-COM’s 0.5 micron low noise GaAs MESFET process. This process features full passivation for increased performance and reliability. The MAMX-008611 is 100% RF tested to ensure superior performance specification compliance.

**Ordering Information<sup>1</sup>**

Part Number	Package
MAMX-008611-000000	SOT-26
MAMX-008611-TR1000	1000 piece reel
MAMX-008611-TR3000	3000 piece reel

1. Reference Application Note M513 for reel size information.

**Functional Schematic**

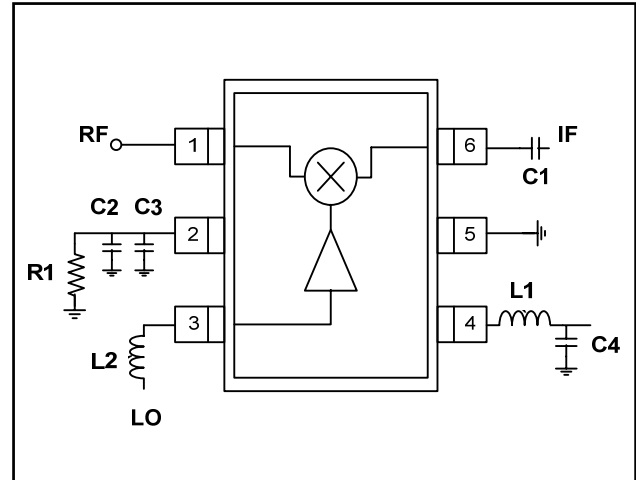

**Pin Configuration**

Pin No.	Pin Name	Description
1	RF Port	RF Input/Output
2	Bias	LO Amplifier Bias Resistor
3	LO Port	LO Input
4	V <sub>DD</sub>	LO Amplifier V <sub>DD</sub>
5	GND	Ground
6	IF Port	IF Input/Output

**Absolute Maximum Ratings<sup>2,3,4,5</sup>**

Parameter	Absolute Maximum
Input RF/IF Power <sup>4</sup>	+27 dBm
Input LO Power <sup>4</sup>	+17 dBm
Operating Voltages <sup>4</sup>	V <sub>DD</sub> = +6 V
Operating Temperature	-30°C to +80°C
Storing Temperature	-65°C to +150°C

2. Exceeding any one or combination of these limits may cause permanent damage to this device.
3. M/A-COM does not recommend sustained operation near these survivability limits.
4. Ambient Temperature (TA) = +25°C
5. Typical Thermal Resistance (θ<sub>JC</sub>) = 108°C/W at nominal bias

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**Low Cost MMIC Mixer with Local Oscillator Amplifier**  
0.8 GHz - 1.0 GHz

**MAMX-008611**  
**V1**


**Electrical Specifications<sup>6</sup>:**  $T_A = +25^\circ\text{C}$ ,  $RF = 900\text{ MHz} (-15\text{ dBm})$ ,  $LO = 730\text{ MHz} (-5\text{ dBm})$ ,  $IF = 170\text{ MHz}$ ,  $V_{DD} = 2.7\text{ V}$ , **Typical  $I_{DD} = 5\text{ mA}$**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Conversion Loss		dB	—	9.3	11
Isolation	LO to RF	dB	20	28	—
	LO to IF	dB	10	12	—
	RF to IF	dB	—	20	—
VSWR	RF Port	Ratio	—	2.0:1	—
	LO Port	Ratio	—	2.0:1	—
	IF Port	Ratio	—	2.0:1	—
Input 1 dB Compression	RF Freq = 900 MHz, LO = -5 dBm	dBm	—	14	—
Two Tone IM Ratio	Two tones @ -10 dBm each; Two spacing = 1 MHz, IF = 170 MHz	dBc	—	59	—


6. IMR vs. RF drive can be calculated by the formula:  $IMR = [44 - 1.5(PIN)]$

**Recommended PCB Configuration**

**Layout View**

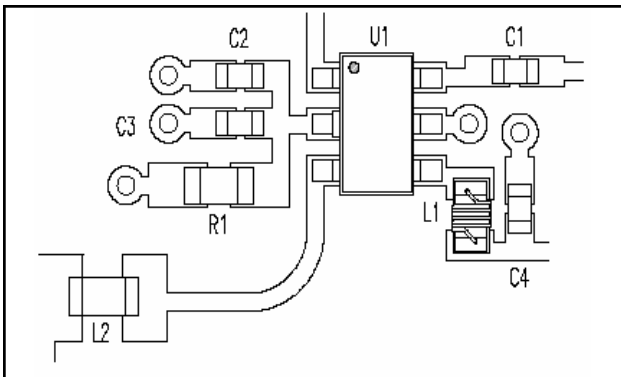

**PCB Cross Section View**

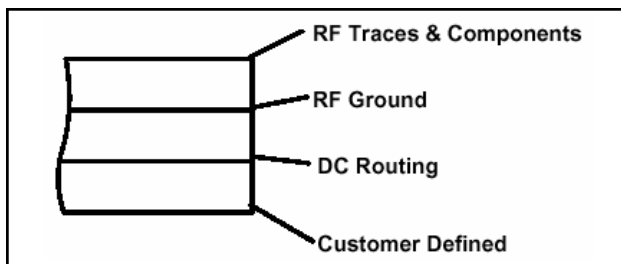


PCB dielectric between RF traces and RF ground layers should be chosen to reduce RF discontinuities between  $50\ \Omega$  lines and package pins. M/A-COM recommends an FR-4 dielectric thickness of  $0.008''$  ( $0.2\text{ mm}$ ) yielding a  $50\ \Omega$  line width of  $0.015''$  ( $0.38\text{ mm}$ ). The recommended metallization thickness is 1 oz. Copper.

**External Circuitry Parts List**

Part	Value	Purpose
R1	$200\ \Omega$	LO Amplifier Bias Resistor
L1	$22\text{ nH}$	LO Amplifier Bias Input
L2	$10\text{ nH}$	LO Port Matching
C1	$10\text{ nF}$	IF Port Matching
C2	$10\text{ nF}$	IF Bypass Capacitor
C3	$22\text{ pF}$	RF Bypass Capacitor
C4	$47\text{ pF}$	$V_{DD}$ Bypass

**Lead-Free SOT-26 Plastic Package<sup>†</sup>**

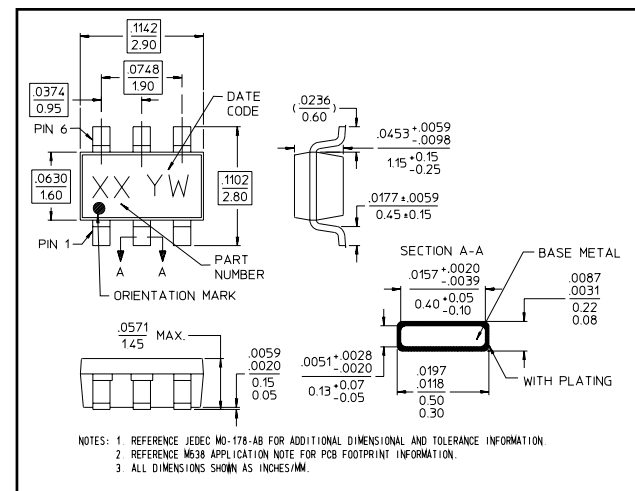

<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations. Meets JEDEC moisture sensitivity level 1 requirements.

**Low Cost MMIC Mixer with Local Oscillator Amplifier  
0.8 GHz - 1.0 GHz**

**MAMX-008611  
V1**

**Spurious Table**

	LO Harmonic (n)	RF Harmonic (m)				
		0X	1X	2X	3X	4X
0X	-10 dBm	X	4.1	44.9	69.5	79.7
	0 dBm	X	3.9	31.9	48.4	70.0
1X	-10 dBm	13.8	0	47.6	82.0	76.6
	0 dBm	22.9	0	35.1	73.0	83.8
2X	-10 dBm	10.8	18.9	46.5	70.6	78.0
	0 dBm	20.4	18.9	36.6	55.9	84.0
3X	-10 dBm	12.1	23.8	41.5	76.9	77.1
	0 dBm	22.7	23.8	31.0	63.1	74.0
4X	-10 dBm	13.6	50.9	68.5	64.5	80.6
	0 dBm	24.0	49.4	58.9	45.4	63.4

- The spurious table shows the spurious signals resulting from the mixing of the RF and LO input signals assuming down conversion.
- Mixing products are indicated relative to the IF level.
- The lower frequency mixing term is shown for two different RF input levels.
- The RF frequency is 900 MHz, the LO frequency is 730 MHz.


[ $n_{RF} - m_{FLO}$ ] RF = -10 dBm  
[ $n_{RF} - m_{FLO}$ ] RF = 0 dBm

**Typical Performance Data**


**Down Converter Application Test Conditions:**

**RF=900 MHz, IF=170 MHz, LO=730 MHz (LO Power = -5dBm)**


**Conversion Loss vs. Frequency**

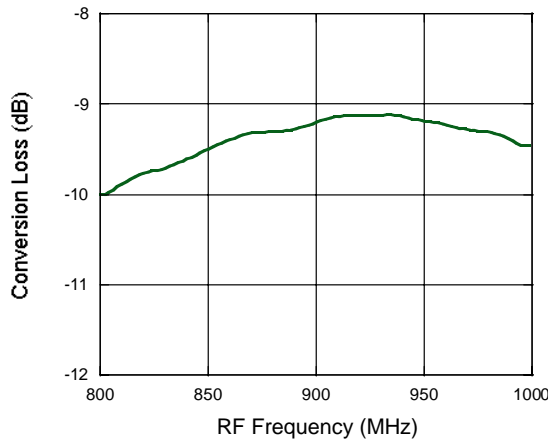

**VSWR vs. Frequency**

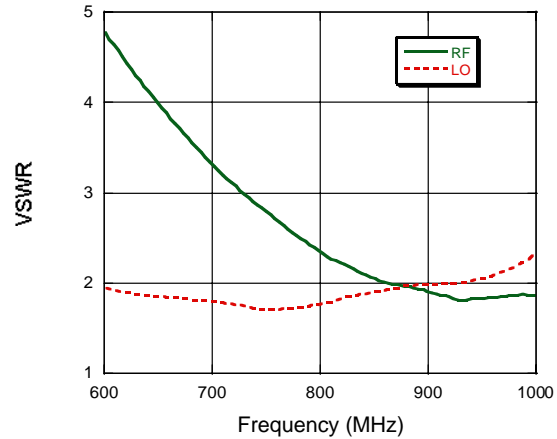

**IMR Plot**

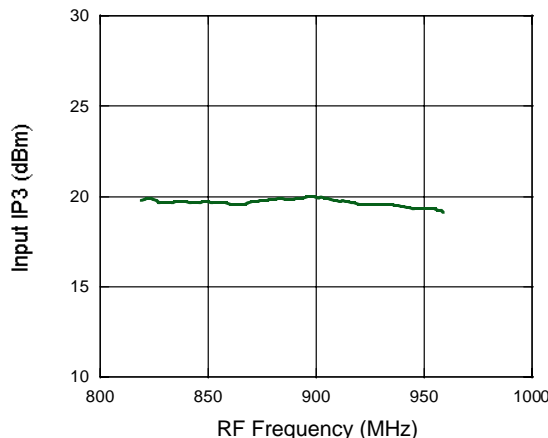

**Isolations**

