


ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS														
Part Number	Working Reverse Voltage (V _{rrm}) Volts	Average Rectified Current (I _o)		Reverse Current @ V _{rrm} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current tp=8.3ms (I _{fsm})	Repetitive Surge Current (I _{rfsm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}			Junction Cap. @50VDC @ 1kHz (C _j)
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	L=000	L=.125	L=.250	25°C
		Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	°C/W	°C/W	°C/W	pF
1N6513	2000	2.00	1.50	1.0	25	3.5	2.0	100	15	70	3	6	12	25
1N6515	3000	1.50	1.00	1.0	25	6.0	1.5	60	10	70	3	6	12	20
1N6517	5000	1.00	0.50	1.0	25	8.0	1.0	40	8	70	3	6	12	16
1N6519	10000	0.50	0.25	1.0	25	13.0	0.5	25	5	70	3	6	12	8

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)If=0.5A, Ir=1.0A, Irr=0.25A • Op. Temp.= -65°C to +175°C Stg. Temp.= -65°C to +200°C



Part	A
1N6513	.310(7.82) MAX. .250(7.6) MIN.
1N6515	.330(8.38) MAX. .270(6.85) MIN.
1N6517	.350(8.89) MAX. .290(7.37) MIN.
1N6519	.400(10.16) MAX. .340(8.64) MIN.

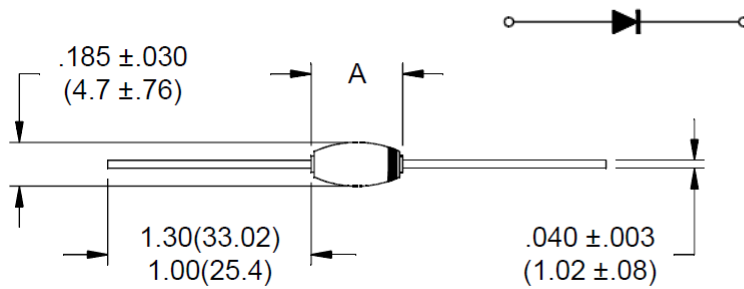