

**isc N-Channel Mosfet Transistor**


**20N60**

**• FEATURES**

- Drain Current  $I_D = 20A @ T_C = 25^\circ C$
- Drain Source Voltage-  
:  $V_{DSS} = 600V(\text{Min})$
- Low ON Resistance  $R_{DS(on)} = 0.45 \Omega (\text{Max})$
- Fast Switching


**• DESCRIPTION**

- High efficiency switch mode power supply
- Motor control, UPS, DC
- Choppers and switch-mode

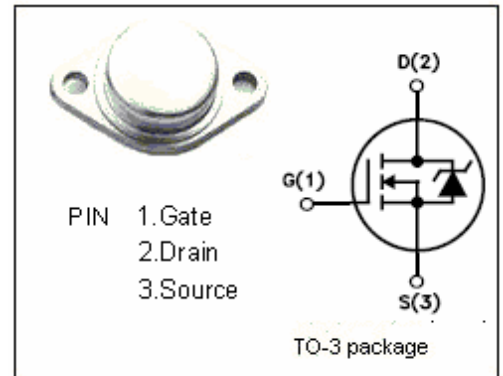

**• ABSOLUTE MAXIMUM RATINGS( $T_a = 25^\circ C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{DSS}$	Drain-Source Voltage	600	V
$V_{GS}$	Gate-Source Voltage-Continuous	$\pm 20$	V
$I_D$	Drain Current-Continuous	20	A
$I_{DM}$	Drain Current-Single Plused	80	A
$P_D$	Power Dissipation	250	W
$T_j$	Max. Operating Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature range	-55~150	$^\circ C$

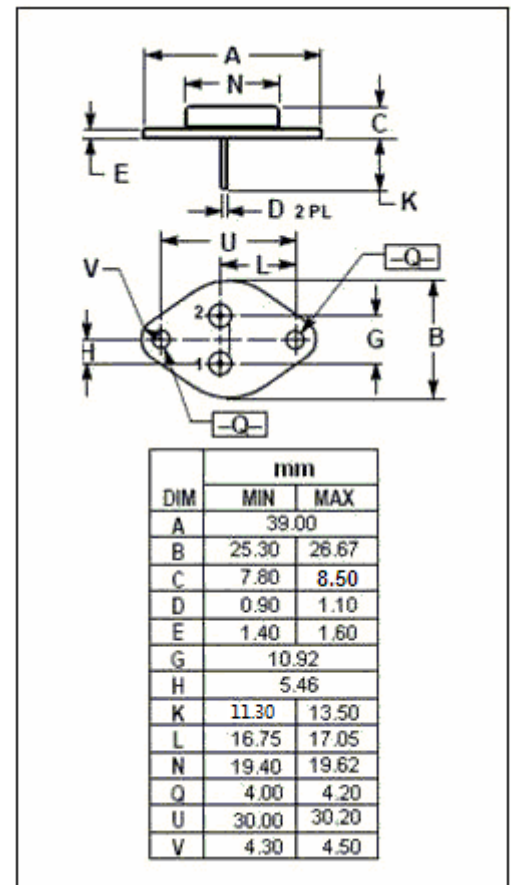

**• THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	0.5	$^\circ C/W$
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	40	$^\circ C/W$

**isc N-Channel Mosfet Transistor****20N60****ELECTRICAL CHARACTERISTICS** $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=0.25\text{mA}$	600		V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=0.25\text{mA}$	2	4	V
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10\text{V}; I_D=10\text{A}$		0.45	$\Omega$
$I_{GSS}$	Gate-Body Leakage Current	$V_{GS}= \pm 20\text{V}; V_{DS}=0$		$\pm 100$	nA
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=600\text{V}; V_{GS}=0$		10	$\mu\text{A}$
$V_{SD}$	Forward On-Voltage	$I_S=20\text{A}; V_{GS}=0$		1.5	V