

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
 SPRINGFIELD, NEW JERSEY 07081
 U.S.A.

TELEPHONE: (973) 376-2922
 (212) 227-8005
 FAX: (973) 376-8980



PARAMETERS

2N3762
 SI PNP POWER BJT

Description: Si PNP Power BJT

| | |
|--------------------------------|-------|
| Manufacturer..... | |
| Mil/High-Rel? (Y/N)..... | |
| Ic Max. (A)..... | 1.5 |
| Vbr CEO..... | 40 |
| Vbr CBO..... | 40 |
| Max. PD (W)..... | 1.0 |
| Derate (Amb) (W/°C)..... | 22m |
| Min hFE..... | 30 |
| Max. hFE..... | 120 |
| @Ic (test) (A)..... | 1.0 |
| @VCE (V)..... | 1.5 |
| Trans. Freq (Hz) Min..... | 180M |
| Icbo Max. @Vcb Max. (A)..... | 100nA |
| R(sat) (j)..... | 10 |
| Tr Max. (s)..... | 35n |
| t(f) Max. (s)..... | 35n |
| Oper. Temp (°C) Max..... | 175~ |
| Pkg Style..... | TO-5 |
| Pinout Equivalence Number..... | 3-12 |
| Surface Mounted Yes/No..... | NO |

~ Storage Temperature W ICEX ; ICER

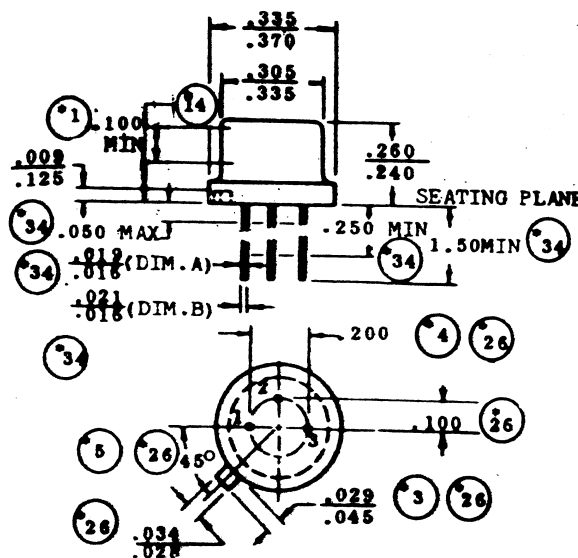

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.