

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- High breakdown voltage


MARKING

Product	Marking Code
2SA1179	M


PACKAGE INFORMATION

Package	MPQ	LeaderSize
SOT-23	3K	7' inch

SOT-23

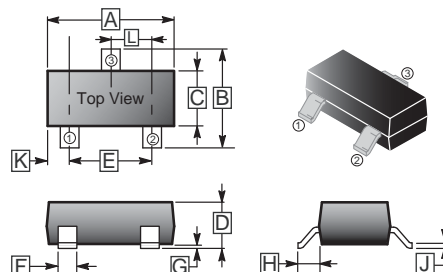

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.80	3.00	G	0.10	REF.
B	2.25	2.55	H	0.55	REF.
C	1.20	1.40	J	0.08	0.15
D	0.90	1.15	K	0.5	REF.
E	1.80	2.00	L	0.95	TYP.
F	0.30	0.50			



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V_{CB0}	-55	V
Collector to Emitter Voltage	V_{CE0}	-50	V
Emitter to Base Voltage	V_{EB0}	-5	V
Collector Current - Continuous	I_C	-150	mA
Collector Power Dissipation	P_C	200	mW
Junction and Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	-55	-	-	V	$I_C = -10\mu\text{A}, I_E = 0$
Collector to Emitter Breakdown	$V_{(BR)CEO}$	-50	-	-	V	$I_C = -1\text{mA}, I_B = 0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -10\mu\text{A}, I_C = 0$
Collector Cut-off Current	I_{CBO}	-	-	-0.1	μA	$V_{CB} = -35\text{V}, I_E = 0$
Emitter Cut-off Current	I_{EBO}	-	-	-0.1	μA	$V_{EB} = -4\text{V}, I_C = 0$
DC Current Gain	h_{FE}	200	-	400		$V_{CE} = -6\text{V}, I_C = -1\text{mA}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	-0.5	V	$I_C = -50\text{mA}, I_B = -5\text{mA}$
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	-	-	-1.0	V	$I_C = -50\text{mA}, I_B = -5\text{mA}$
Transition Frequency	f_T	-	180	-	MHz	$V_{CE} = -6\text{V}, I_C = -10\text{mA}$
Collector Output Capacitance	C_{ob}	-	4	-	pF	$V_{CB} = -6\text{V}, I_E = 0, f = 1\text{MHz}$

CHARACTERISTICS CURVE

