

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
 SPRINGFIELD, NEW JERSEY 07081
 U.S.A.

TELEPHONE: (973) 376-2922
 (212) 227-6005
 FAX: (973) 376-8960

Silicon NPN Power Transistor**2SC4304****DESCRIPTION**



- Collector-Emitter Breakdown Voltage-
 $V_{(BR)CEO} = 800V(\text{Min})$
- High Switching Speed

APPLICATIONS

- Designed for switching regulator and general purpose applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	900	V
V_{CEO}	Collector-Emitter Voltage	800	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	3	A
I_{CM}	Collector Current-Peak	6	A
I_B	Base Current-Continuous	1.5	A
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	35	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~150	$^\circ\text{C}$

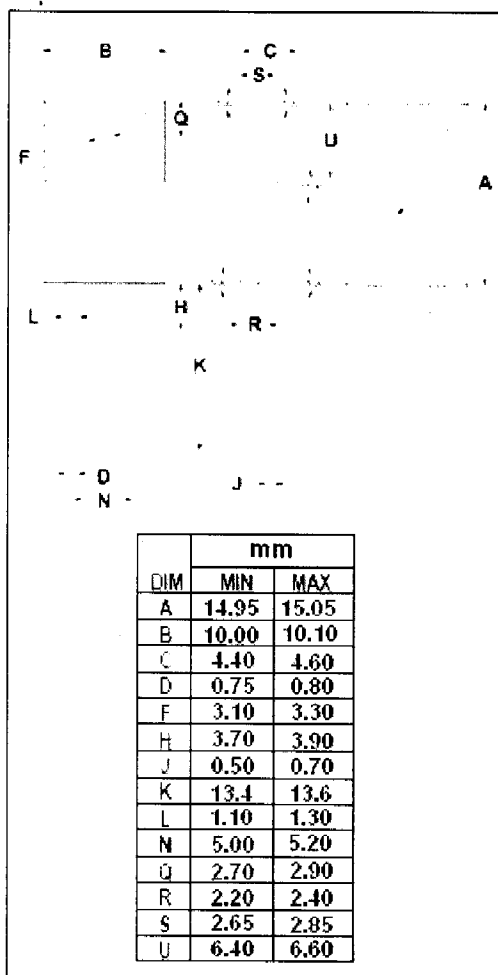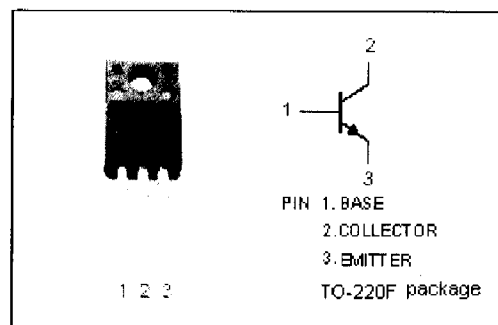

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Quality Semi-Conductors

Silicon NPN Power Transistor

2SC4304

ELECTRICAL CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = 10mA; I _B = 0	800			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 0.7A; I _B = 0.14A			0.5	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = 0.7A; I _B = 0.14A			1.2	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 800V; I _E = 0			100	μA
I _{EBO}	Emitter Cutoff Current	V _{EB} = 7V; I _C = 0			100	μA
h _{FE}	DC Current Gain	I _C = 0.7A; V _{CE} = 4V	10		30	
C _{OB}	Output Capacitance	I _E = 0; V _{CB} = 10V; f = 1MHz		50		pF
f _T	Current-Gain—Bandwidth Product	I _E = -0.3A; V _{CE} = 12V		15		MHz

Switching Times

t _{on}	Turn-On Time	I _C = 0.7A; I _{B1} = 0.1A; I _{B2} = -0.35A; V _{CC} = 250V; R _L = 357 Ω			0.7	μs
t _{stg}	Storage Time				4.0	μs
t _f	Fall Time				0.7	μs