

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
 SPRINGFIELD, NEW JERSEY 07081  
 U.S.A.

TELEPHONE: (973) 376-2922  
 (212) 227-6005  
 FAX: (973) 376-8960

## RECTIFIER ASSEMBLIES

### Three Phase Bridges, 25 Amp, Military Approved

JANTX 483-1  
 JANTX 483-2  
 JANTX 483-3

#### FEATURES

- Qualified to MIL-S-19500/483
- Current Rating: 25A
- PIV: from 200 to 600V
- Surge Ratings: 150A
- Only Fused-in-Glass Diodes Used
- Controlled Avalanche Characteristics
- Aluminum Heat Sink Case, Electrically Insulated

#### DESCRIPTION



This military high-current three phase bridge series is assembled with diodes which have been subjected to TX type screening tests. This series of bridges offers the utmost in high reliability as normally required in military system design.

#### ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage	200 to 600V
Maximum Average D.C. Output Current	
@ $T_C = 55^\circ\text{C}$	25A
@ $T_C = 100^\circ\text{C}$	18.5A
Non-Repetitive Sinusoidal Surge (8.3ms)	
@ $T_C = 55^\circ\text{C}$	150A
Operating and Storage Temperature Range	$-65^\circ\text{C}$ to $+150^\circ\text{C}$
Thermal Resistance Junction to Ambient	$20^\circ\text{C/W}$
Junction to Case	$2.5^\circ\text{C/W}$


LTR	DIMENSIONS			
	INCH		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.730	.770	18.54	19.56
B	.355	.395	9.02	10.03
C	.355	.395	9.02	10.03
D <sub>1</sub>	.141	.151	3.58	3.84
D <sub>2</sub>	.108	.118	2.74	3.00
E	.355	.395	9.02	10.03
F	.230	.270	5.84	6.86
G	.149	.189	3.78	4.80
H	.355	.395	9.02	10.03
J		.82		20.83
K	.39	.51	9.91	12.95
L <sub>1</sub>	.240	.320	6.10	8.13
L <sub>2</sub>	.015	.030	.38	.76
L <sub>3</sub>	.100	.125	2.54	3.18
M	.040	.060	1.02	1.52
N	.72	.78	18.29	19.81
O	1.84	1.90	46.74	48.26
P	2.22	2.28	56.39	57.91
R	.09	.15	2.29	3.81
S	.168	.208	4.27	5.28
T	1.47	1.53	37.34	38.86

#### MECHANICAL SPECIFICATIONS

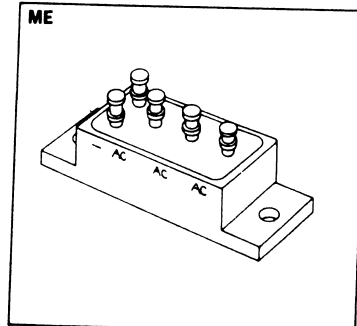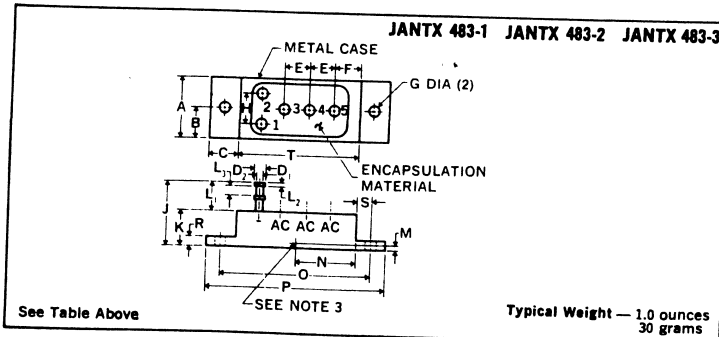

#### NOTES:

1. Terminals shall be tinned.
2. Polarity shall be marked as shown on drawing.
3. Point at which  $T_C$  is read (shall be in metal part of case).



Quality Semi-Conductors