


FIBRE CHANNEL


Dual Transformer

7101-7104

- Designed for use with 75Ω Coaxial or 150Ω STP Cable
- Fast rise time and low baseline wander



MECHANICAL AND SCHEMATIC (All dimensions in inches)

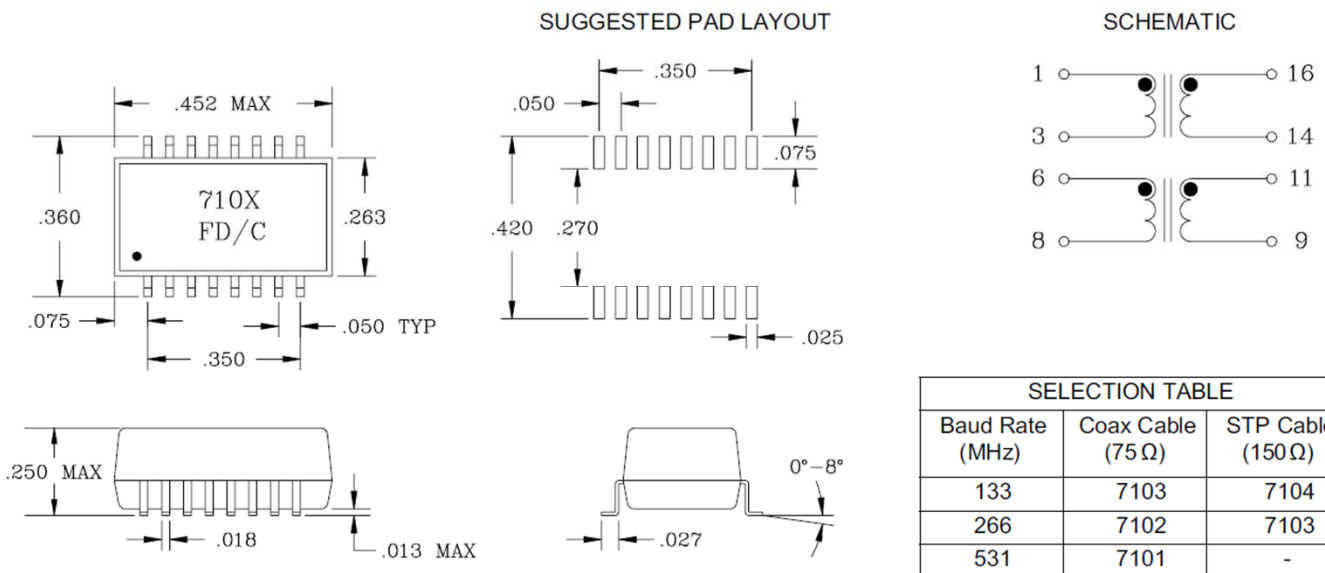

UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES ARE ±0.010

ELECTRICAL SPECIFICATION @ 25°C

Part Number	Turns Ratio (±5%)	Primary Inductance (μH MIN)	Rise Time @20-80% (ns MAX)	C _{ww} (pF MAX)	L _L sec (μH MAX)	DCR (Ω MAX)	Hipot (Vrms MIN)
7101	1:1	7.5	0.5	5.0	.10	.20	2000
7102	1:1	15.0	0.8	5.0	.10	.20	2000
7103	1:1	30.0	1.6	5.0	.10	.20	2000
7104	1:1	60.0	2.0	5.5	.10	.20	2000