



Normally closed  
SOP6-pin type  
of 400V load voltage

PhotoMOS<sup>®</sup>  
GU SOP 1 Form B  
(AQV414S)



mm inch




RoHS compliant

## FEATURES


### 1. Miniature SOP6-pin package

The device comes in a small SOP measuring (W) 4.4 × (L) 6.3 × (H) 2.1 mm (W) .173 × (L) .248 × (H) .083 inch approx. 25% of the volume and 50% of the footprint size of DIP type.

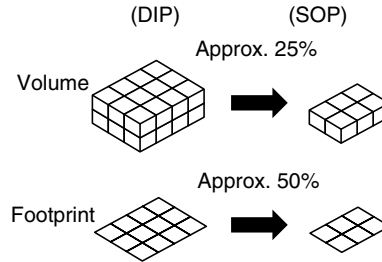

### 2. Low on-resistance (typ. 26 Ω) for normally-closed type

This has been achieved thanks to the built-in MOSFET processed by our proprietary method, DSD (Double-Diffused and Selective Doping) method.

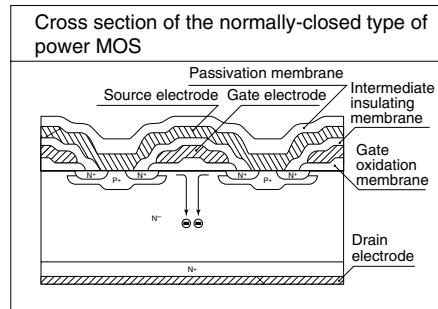

### 3. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 4. Low-level off state leakage current of max. 1 μA

## TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Computers
- Industrial robots
- High-speed inspection machines

## TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
AC/DC dual use	400V	100mA	SOP6-pin	AQV414S	AQV414SX	AQV414SZ	1 tube contains: 75 pcs. 1 batch contains: 1,500 pcs.	1,000 pcs.

\* Indicate the peak AC and DC values.

Note: For space reasons, only "V41S" is marked on the product. The two initial letters of the part number "AQ" and the packing style indicator "X" or "Z" have been omitted.

**RATING**


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV414S	Remarks	
Input	LED forward current	A	50 mA		
	LED reverse voltage		5 V		
	Peak forward current		1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation		75 mW		
Output	Load voltage (peak AC)	A	400 V		
	Continuous load current		B	0.10 A	A connection: Peak AC, DC B, C connection: DC
			C	0.11 A	
				0.12 A	
	Peak load current			0.3 A	A connection: 100 ms (1 shot) VL= DC
Power dissipation		450 mW			
Total power dissipation			500 mW		
I/O isolation voltage			1,500 V AC		
Temperature limits	Operating		-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures	
	Storage		-40°C to +100°C -40°F to +212°F		

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item	Symbol	Type of connection	AQV414S	Remarks	
Input	LED operate (OFF) current	I <sub>off</sub>	0.6 mA	I <sub>L</sub> = Max.	
			Maximum		3 mA
	LED reverse (ON) current	I <sub>fon</sub>	0.4 mA	I <sub>L</sub> = Max.	
			Typical		0.55 mA
LED dropout voltage	V <sub>F</sub>	—	1.25 V (1.14 V at I <sub>F</sub> = 5 mA)	I <sub>F</sub> = 50 mA	
			Maximum		1.5 V
Output	On resistance	R <sub>on</sub>	A	26 Ω	I <sub>F</sub> = 0 mA I <sub>L</sub> = Max. Within 1 s on time
			Maximum	50 Ω	
	On resistance	R <sub>on</sub>	B	20 Ω	I <sub>F</sub> = 0 mA I <sub>L</sub> = Max. Within 1 s on time
			Maximum	25 Ω	
	On resistance	R <sub>on</sub>	C	10 Ω	I <sub>F</sub> = 0 mA I <sub>L</sub> = Max. Within 1 s on time
			Maximum	12.5 Ω	
Off state leakage current	I <sub>Leak</sub>	—	1 μA	I <sub>F</sub> = 5 mA, V <sub>L</sub> = Max.	
Transfer characteristics	Operate (OFF) time*	T <sub>off</sub>	0.47 ms	I <sub>F</sub> = 0 mA → 5 mA V <sub>L</sub> = Max.	
			Maximum		1.0 ms
	Reverse (ON) time*	T <sub>on</sub>	0.28 ms	I <sub>F</sub> = 5 mA → 0 mA V <sub>L</sub> = Max.	
			Maximum		1.0 ms
	I/O capacitance	C <sub>iso</sub>	—	0.8 pF	f = 1 MHz V <sub>E</sub> = 0 V
				Maximum	
Initial I/C isolation resistance	R <sub>iso</sub>	—	1,000 MΩ	500 V DC	

\*Operate/Reverse time

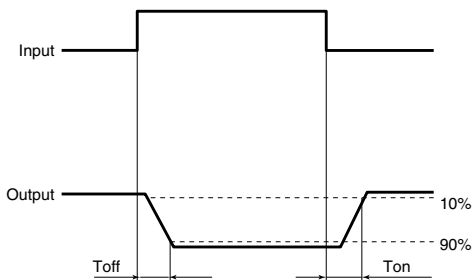

**RECOMMENDED OPERATING CONDITIONS**

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	5	mA

■ For Dimensions.

■ For Schematic and Wiring Diagrams.

■ For Cautions for Use.

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.


# GU SOP 1 Form B (AQV414S)

## REFERENCE DATA

### 1. Load current vs. ambient temperature characteristics


Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

Type of connection: A

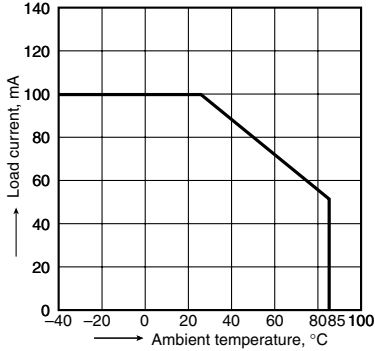


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
 LED current: 0 mA;  
 Continuous load current: 100 mA (DC)

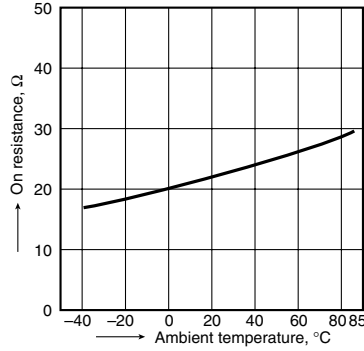


### 3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA;  
 Load voltage: 400 V (DC);  
 Continuous load current: 100 mA (DC)

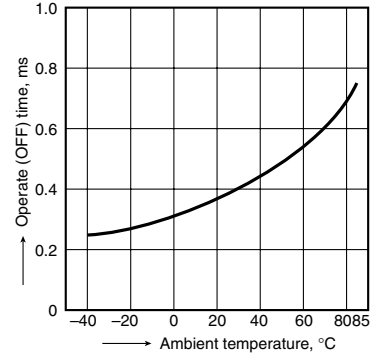


### 4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 50 mA;  
 Load voltage: 400 V (DC);  
 Continuous load current: 100 mA (DC)

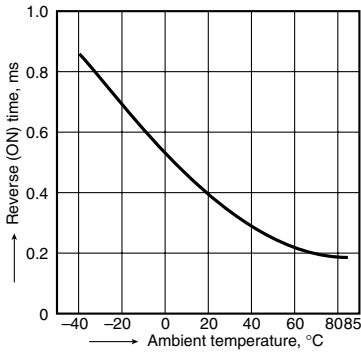


### 5. LED operate (OFF) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
 Continuous load current: 100 mA (DC)

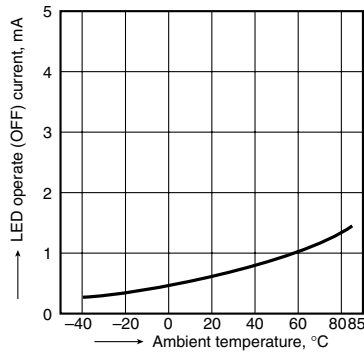


### 6. LED reverse (ON) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
 Continuous load current: 100 mA (DC)

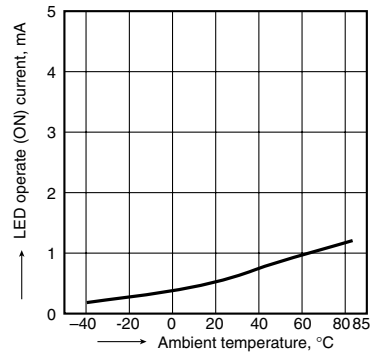


### 7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

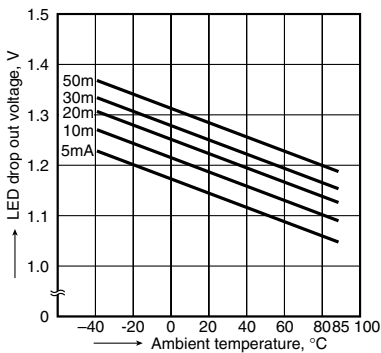


### 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$




### 9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;  
 LED current: 5 mA;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

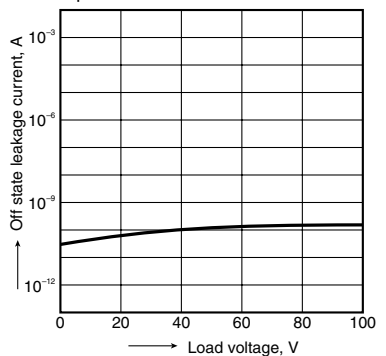


## 10. Operate (OFF) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
 Load voltage: 400 V (DC); Continuous load current:  
 100 mA (DC); Ambient temperature: 25°C 77°F

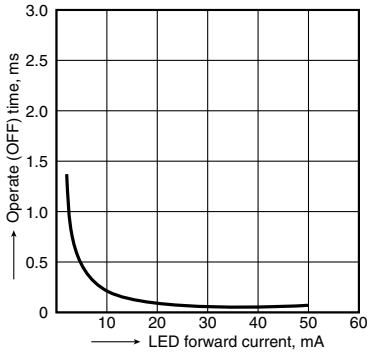

## 11. Reverse (ON) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
 Load voltage: 400 V (DC); Continuous load current:  
 100 mA (DC); Ambient temperature: 25°C 77°F

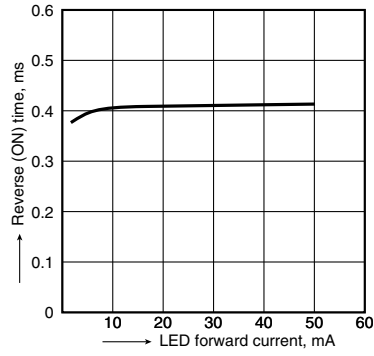

## 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

