

## Surface Mount Fast Switching Diode


## BAS21T

### FEATURES

- Ultra-Small surface mount package.  Lead-free
- Fast switching speed.
- For general purpose switching applications.
- High conductance.

### APPLICATIONS

- General purpose switching application.

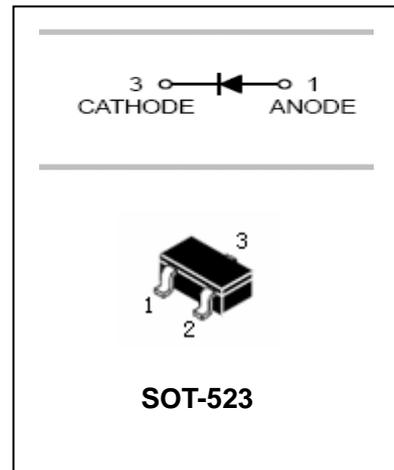

### ORDERING INFORMATION

Type No.	Marking	Package Code
BAS21T	T3	SOT-523

### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units	
$V_{RRM}$	Peak repetitive reverse voltage	250	V	
$V_{RWM}$	Working peak reverse voltage	200		
$V_R$	DC reverse voltage	200		
$V_{R(RMS)}$	RMS reverse voltage	141	V	
$I_{FM}$	Forward continuous current(MAX.)	400	mA	
$I_O$	Average rectified output current	200	mA	
$I_{FRM}$	Repetitive peak forward current	625	mA	
$I_{FSM}$	Non-repetitive peak forward surge current	@t=1.0μs	2.5	A
		@t=1.0s	0.5	
$P_d$	Power dissipation	150	mW	
$R_{\theta JA}$	Thermal resistance junction to ambient	833	°C/W	
$T_j, T_{stg}$	Junction and Storage Temperature	-65~150	°C	

# Diode Semiconductor Korea

## Surface Mount Fast Switching Diode

## BAS21T

### ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)R}$	$I_R=100\mu A$	250		V
Leakage current	$I_R$	$V_R=200V, T_j=25^\circ C$		100	nA
		$V_R=200V, T_j=100^\circ C$		15	$\mu A$
Forward voltage	$V_F$	$I_F=100mA$		1.0	V
		$I_F=200mA$		1.25	V
Typical total capacitance	$C_T$	$V_R=0V, f=1MHz$		5.0	pF
Reverse recovery Time	$t_{rr}$	$I_F=I_R=30mA, I_{rr}=0.1 \cdot I_R, R_L=100\Omega$		50	ns

### TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

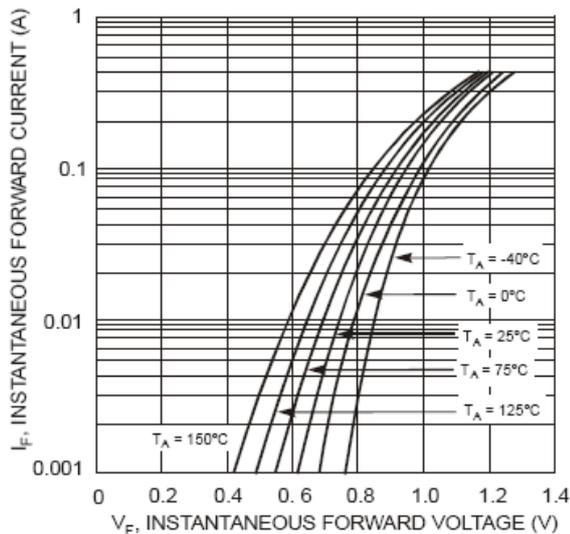


Fig. 1 Typical Forward Characteristics

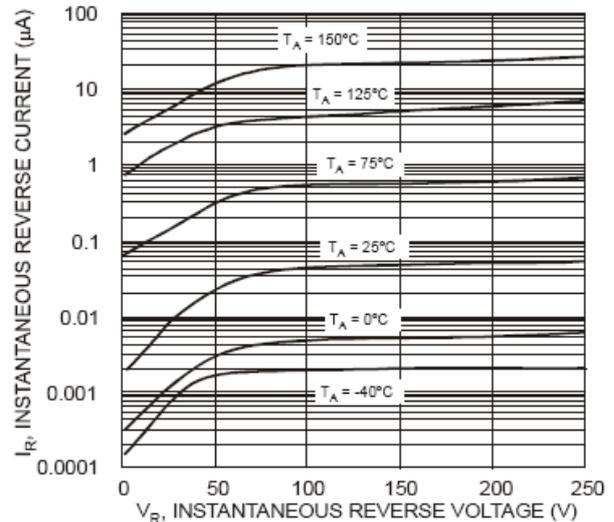


Fig. 2 Typical Reverse Characteristics

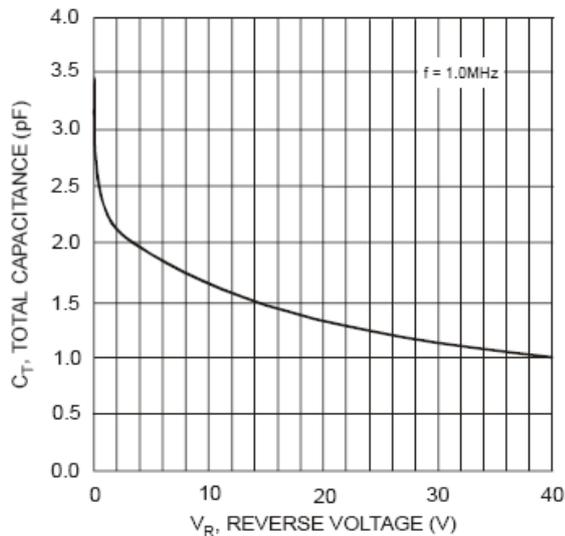


Fig. 3 Typical Capacitance vs. Reverse Voltage

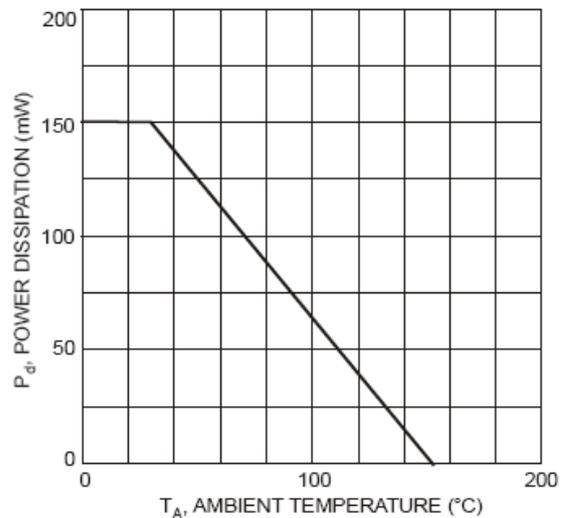


Fig. 4 Power Derating Curve, Total Package

# Diode Semiconductor Korea


## Surface Mount Fast Switching Diode

## BAS21T


### PACKAGE OUTLINE

Plastic surface mounted package

SOT-523

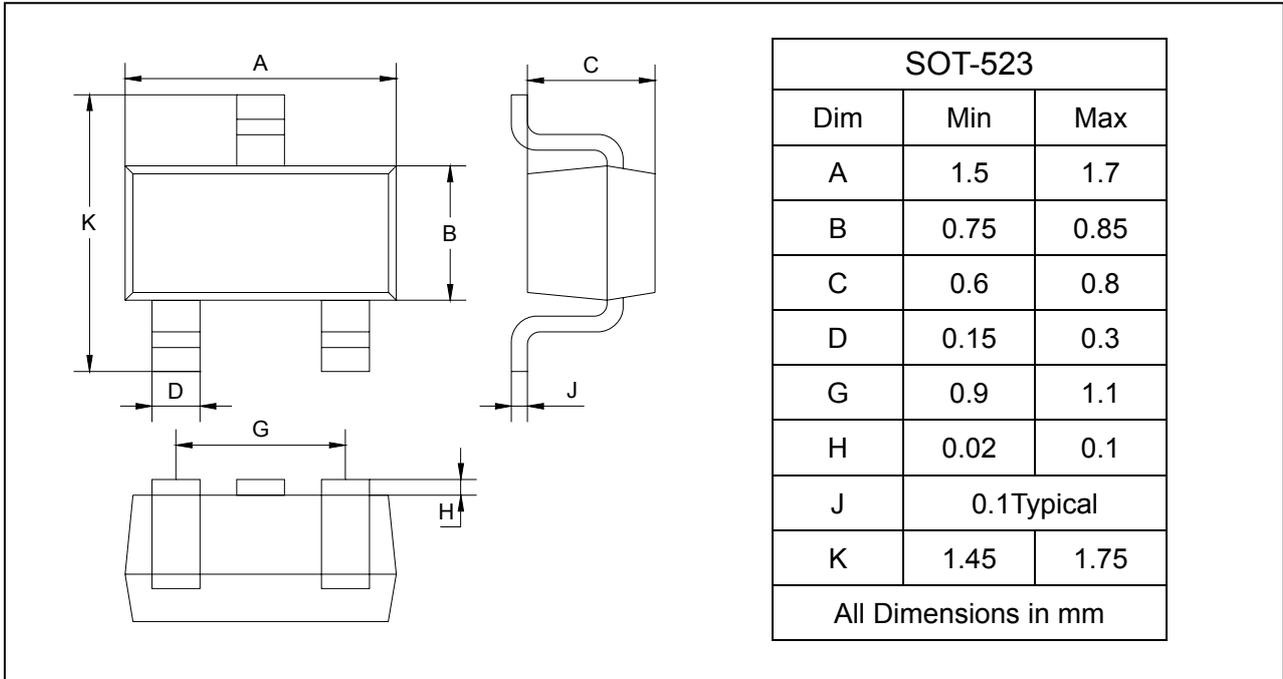

### SOLDERING FOOTPRINT

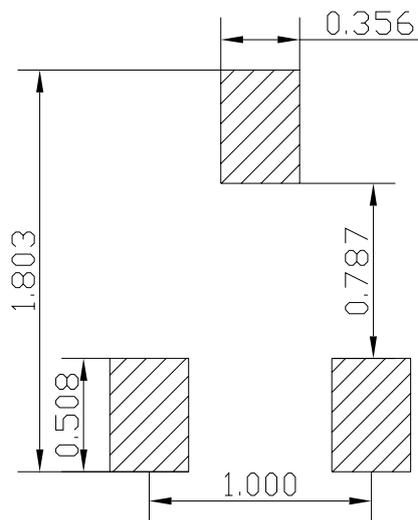

Unit : mm

### PACKAGE INFORMATION

Device	Package	Shipping
BAS21T	SOT-523	3000/Tape&Reel