


BC182...BC184

NPN Silicon Epitaxial Planar Transistor

for general purpose amplifier applications




1. Collector 2. Base 3. Emitter
TO-92 Plastic Package

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	BC182 60	V
BC183, BC184		45	
Collector Emitter Voltage	V_{CEO}	BC182 50	V
BC183, BC184		30	
Emitter Base Voltage	V_{EBO}	6	V
Collector Current	I_C	100	mA
Total Power Dissipation	P_{tot}	350	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_s	- 55 to + 150	$^\circ\text{C}$


Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain	h_{FE}	40	-	-
at $V_{CE} = 5\text{ V}$, $I_C = 10\text{ }\mu\text{A}$				
at $V_{CE} = 5\text{ V}$, $I_C = 2\text{ mA}$	h_{FE}	100	-	-
	h_{FE}	120	500	-
	h_{FE}	120	800	-
at $V_{CE} = 5\text{ V}$, $I_C = 100\text{ mA}$	h_{FE}	250	800	-
	h_{FE}	80	-	-
	h_{FE}	130	-	-
Collector Base Cutoff Current	I_{CBO}	-	15	nA
at $V_{CB} = 50\text{ V}$			BC182	
at $V_{CB} = 30\text{ V}$	BC183, BC184	-	15	
Emitter Base Cutoff Current	I_{EBO}	-	15	nA
Collector Base Breakdown Voltage	$V_{(BR)CBO}$	60	-	V
at $I_C = 10\text{ }\mu\text{A}$				
Collector Emitter Breakdown Voltage	$V_{(BR)CEO}$	50	-	V
		at $I_C = 2\text{ mA}$	BC183, BC184	
Emitter Base Breakdown Voltage	$V_{(BR)EBO}$	6	-	V
at $I_E = 100\text{ }\mu\text{A}$				



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 27/12/2007

BC182...BC184

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$, $I_B = 0.5\text{ mA}$ at $I_C = 100\text{ mA}$, $I_B = 5\text{ mA}$	$V_{CE(sat)}$	-	0.25 0.6	V
Base Emitter Saturation Voltage at $I_C = 100\text{ mA}$, $I_B = 5\text{ mA}$	$V_{BE(sat)}$	-	1.2	V
Base Emitter On Voltage at $V_{CE} = 5\text{ V}$, $I_C = 2\text{ mA}$	$V_{BE(on)}$	0.55	0.7	V
Current Gain Bandwidth Product at $V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$, $f = 100\text{ MHz}$	f_T	150	-	MHz
Collector Base Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	5	pF

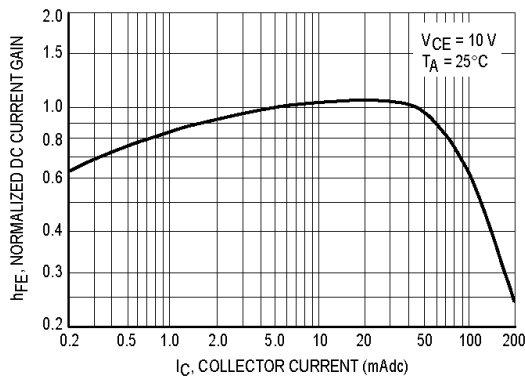


Figure 1. Normalized DC Current Gain

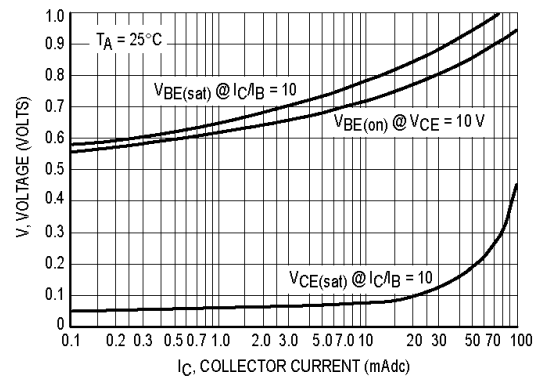


Figure 2. "Saturation" and "On" Voltages

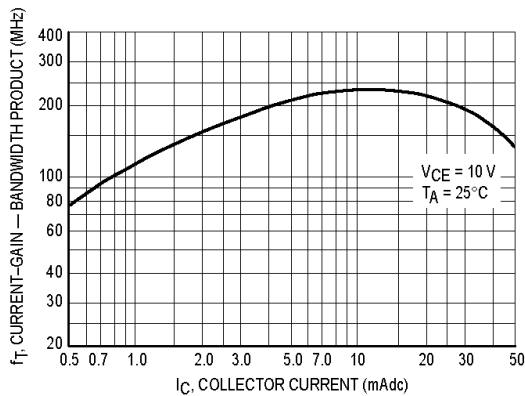


Figure 3. Current-Gain — Bandwidth Product


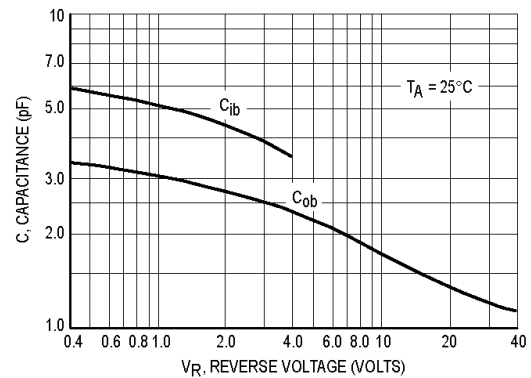


Figure 4. Capacitances



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506098