




**FEATURES**

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier. majority carrier conduction
- Low power loss,high efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- In compliance with EU RoHS 2002/95/EC directives

**MECHANICAL DATA**

- Case: JEDEC DO-214AA molded plastic
- Terminals:Solder plated, solderable per MIL-STD-750,Method 2026
- Polarity: Color band denotes positive end (cathode)
- Standard packaging: 12mm tape (EIA-481)
- Weight: 0.0032 ounce, 0.092 gram

DO-214AA(SMB)

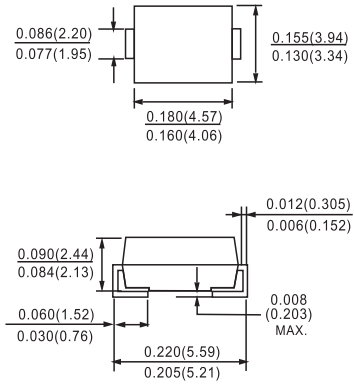

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load.

PARAMETER	SYMBOL	BR34	BR34A	BR35	BR36	BR38	BR39	BR310	BR315	BR320	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	40	45	50	60	80	90	100	150	200	V
Maximum RMS Voltage	$V_{RMS}$	28	31.5	35	42	56	63	70	105	140	V
Maximum DC Blocking Voltage	$V_{DC}$	40	45	50	60	80	90	100	150	200	V
Maximum Average Forward Current (See figure 1)	$I_{F(AV)}$	3.0									A
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	80									A
Maximum Forward Voltage at 3.0A ( Note 1)	$V_F$	0.70		0.74		0.80		0.90			V
Maximum DC Reverse Current $T_J=25^{\circ}C$ at Rated DC Blocking Voltage $T_J=100^{\circ}C$	$I_R$						0.05 20				mA
Typical Thermal Resistance ( Note 2)	$R_{\theta JL}$ $R_{\theta JA}$						20 75				$^{\circ}C / W$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150				-65 to +175					$^{\circ}C$

NOTES:

1. Pulse Test with PW =300μsec, 2% Duty Cycle.
2. Mounted on P.C. Board with 8.0mm<sup>2</sup> (.013mm thick) copper pad areas.




**TAYCHIPST**

MINI SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER


**BR34 THRU BR320**

40V-200V 3.0A


**RATINGS AND CHARACTERISTIC CURVES BR34 THRU BR320**

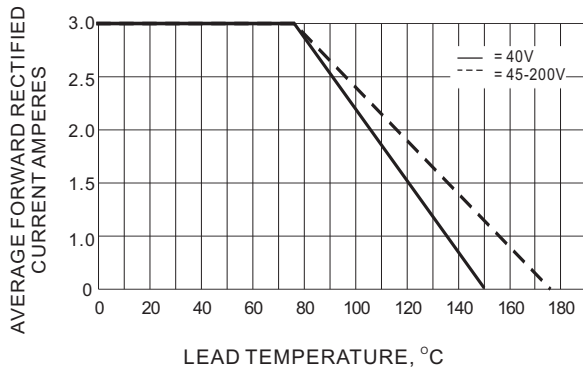


**Fig.1- FORWARD CURRENT DERATING CURVE**

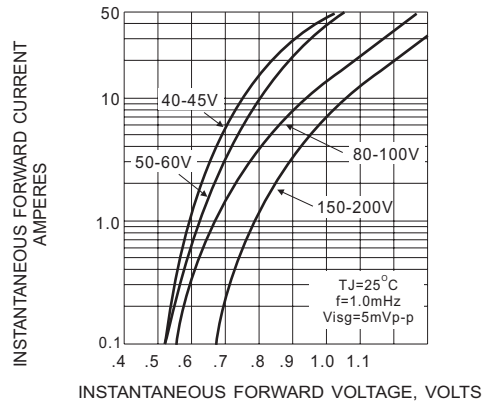

**Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC**

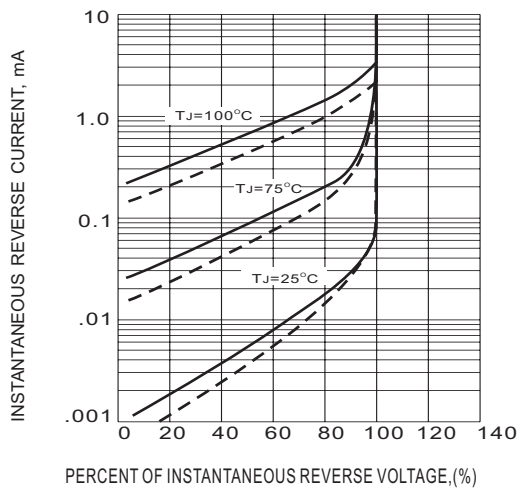

**Fig.3- TYPICAL REVERSE CHARACTERISTIC**

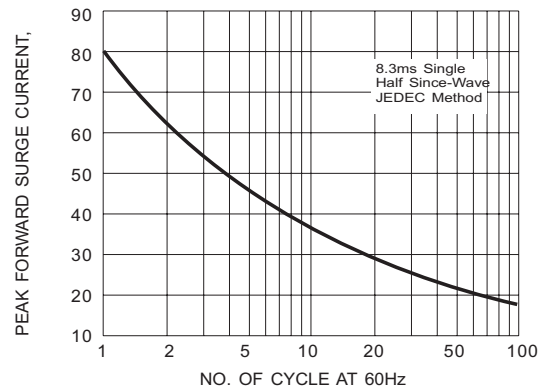

**Fig.4- MAXIMUM NON - REPETITIVE SURGE CURRENT**