

# BR600 - BR610

**PRV : 50 - 1000 Volts**

**Io : 6.0 Amperes**


## FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL - STD 202 , Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 3.6 grams

# SILICON BRIDGE RECTIFIERS

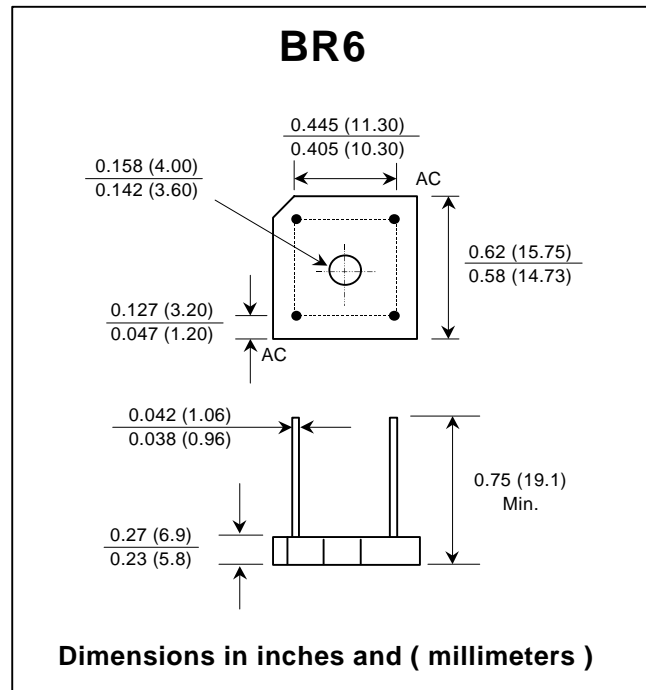

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	BR600	BR601	BR602	BR604	BR606	BR608	BR610	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Current $T_c=50^\circ\text{C}$	$I_{F(AV)}$	6.0							A
Peak Forward Surge Current, Single half sine wave Superimposed on rated load (JEDEC Method)	$I_{FSM}$	200							A
Current Squared Time at $t < 8.3$ ms.	$I^2t$	64							$\text{A}^2\text{S}$
Maximum Forward Voltage per Diode at $I_F = 3$ A.	$V_F$	1.0							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	10							$\mu\text{A}$
	$I_{R(H)}$	200							$\mu\text{A}$
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	8.0							$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	$T_J$	- 40 to + 150							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	- 40 to + 150							$^\circ\text{C}$

### Notes :


1. Thermal Resistance from junction to case with units mounted on a 2.6" x 1.4" x 0.06" THK (6.5cm.x 3.5cm.x 0.15cm.) Al. Plate. Heatsink.

## RATING AND CHARACTERISTIC CURVES ( BR600 - BR610 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

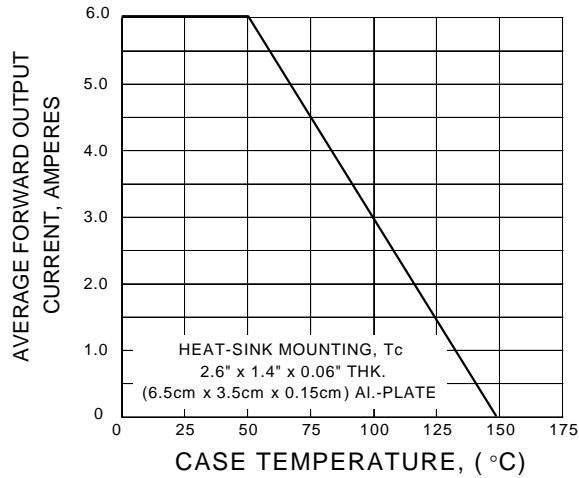

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

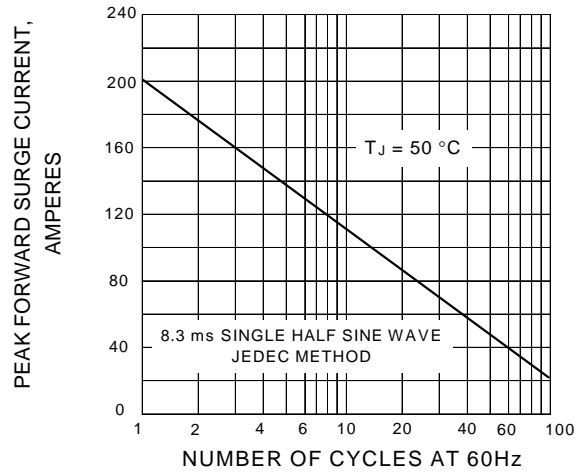

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

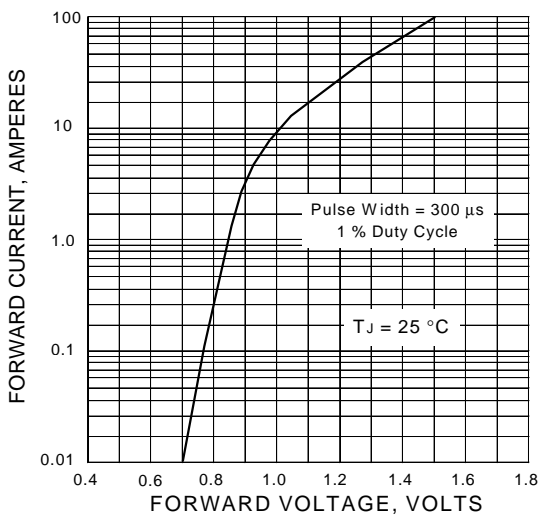

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER DIODE**

