

Typical Applications

CDMA2000 and UMTS Base Stations
 Test and Measurement Equipment

Features

Ultra-High Stability
 Excellent Temperature Stability
 SC-Cut Crystal Crystal



Previous Vectron Model Numbers

4895

Frequency range

4 MHz – 15 MHz

Standard frequencies

5; 10; 15MHz

Frequency stabilities¹ [SC Cut Crystal – Standard]

Parameter	Min	Typ	Max.	Units	Operating temp range	Ordering Code
vs. operating temperature range (peak to peak stability)	-0.4 -0.2		+0.4 +0.2	ppb ppb	0 ... +70°C 0 ... +70°C	C049 C029
Parameter	Min	Typ	Max.	Units	Condition	
Initial tolerance	-50		+50	ppb	at time of shipment, nominal EFC	
vs. supply voltage change	-0.2		+0.2	ppb	V _S ± 5%	
vs. load change	-0.1		+0.1	ppb	Load ± 5%	
vs. aging /1 day	-0.5		+0.5	ppb	after 72 hours of operation	
vs. aging /1 day	-0.2		+0.2	ppb	after 7 days of operation	
vs. aging /1 Year	-20		+20	ppb	after 72 hours of operation	
vs. aging / year (following years)	-10		+10	ppb		
Warm-up Time			5	minutes	to ± 10ppb of final frequency (1 hour reading) @ +25°C	

Supply voltage (Vs)

Parameter	Min	Typ	Max.	Units	Condition	Ordering Code
Supply voltage [Standard]	11.4	12.0	12.6	VDC		SV120
Power consumption			4.5 1.0	Watts Watts	during warm-up steady state @ +25°C	

RF output

Parameter	Min	Typ	Max.	Units	Condition	Ordering Code
Signal [Standard]					HCMOS	RFH
Load		15		pF		
Signal Level (Vol)			0.5	VDC	15pF load	
Signal Level (Voh)	4.5			VDC	15pF load	
Duty cycle	45		55	%	@ (Voh-Vol)/2	
Signal [Option]					Sinewave	RFS
Load		50				
Output Power	+3.0	+5.5	+8.0	dBm	50 Ohm load	
Harmonics			-30	dBc	50 Ohm load	
Sub-Harmonics			-40	dBc	50 Ohm load	

Frequency Tuning (EFC)

Parameter	Min	Typ	Max.	Units	Condition
Tuning Range	±0.50	±0.75	±1.0	ppm	
Linearity			20	%	
Tuning Slope					Positive
Control Voltage Range	0.0	2.5	5.0	VDC	

Vectron International · www.vectron.com

v.2005-02-04 · page 1 of 4

Vectron International
 Headquarters
 267 Lowell Road
 Hudson, New Hampshire 03051
 +1-888-328-7661 tel
 +1-888-329-8328 fax

Vectron International LLC.
 100 Watts Street
 Mount Holly Springs, PA 17065
 USA
 +1 717-486-3411 tel
 +1 717-486-5920 fax

Vectron international GmbH & Co. KG
 Landstrasse
 D-74924 Neckarbischofsheim
 Germany
 +49-07268-801-0 tel
 +49-07268-801-281 fax

Vectron Asia Pacific Sales Office
 Unit 3119 31st Floor, Jin Mao Tower, 88
 Century Boulevard, Shanghai,
 P.R. China 200120
 +86 21 28909740 tel.
 +86 21 28909240 fax

Reference Voltage Output (Vref)


Parameter	Min	Typ	Max.	Units	Condition
Reference Voltage	4.9	5.0	5.1	VDC	

Enclosures

Type A

Package Codes:

Code	Height "H"	Pin Length "L"
A1	25.40	6.35
A2 ⁵	19.00	6.35

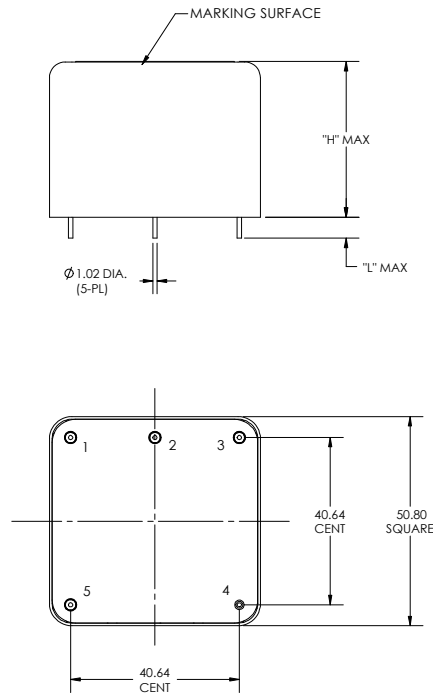

Dimensions: mm

Pin Connections

- 1 Electronic Frequency Control Input (EFC)
- 2 Reference Voltage Output
- 3 RF Output
- 4 Ground (Case)
- 5 Supply Voltage Input (Vs)

Additional parameters

Parameter	Min	Typ	Max.	Units	Condition	
Phase Noise ³			-90	dBc/Hz	1 Hz	at 10 MHz
			-120	dBc/Hz	10 Hz	
			-135	dBc/Hz	100 Hz	
			-140	dBc/Hz	1 kHz	
			-140	dBc/Hz	>10 kHz	
Weight			140	g		
Processing & Packing	Handling & processing note					

Absolute Maximum Ratings

Parameter	Min	Typ	Max.	Units	Condition
Supply voltage (Vs)			28	V	
Output Load			50	pF	with HCMOS signal with Sinewave signal
			25	Ohms	
Operable temperature range	-55		+85	°C	
Storage temperature range	-55		+125	°C	

How to Order this Product:

Step 1	Use this worksheet to forward the following information to your factory representative:				
Model	Stability Code	Supply Voltage Code	RF Output Code	Package Code	Frequency
C4700		SV120			
<i>Example: C4700</i>	<i>C049</i>	<i>SV120</i>	<i>RFH</i>	<i>A1</i>	<i>10.000Mhz</i>

Step 2	The factory representative will then respond with a Vectron Model Number in the following configuration:		
Model	Package Code	Dash	Dash Number
C4700	[Customer Specified Package Code]	-	[Factory Generated 4 digit number]

Typical P/N = C4700A1-0001

Notes:

- 1 Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- 2 Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C)
- 3 Phase noise degrades with increasing output frequency.
- 4 Subject to technical modification.
- 5 Contact factory for availability.

[THIS PAGE INTENTIONALLY BLANK]