


CL03-15T High Voltage Diode



FEATURES

- Low leakage,high surge capability
- High voltage,fast recovery rectifier
- $T_j:-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- Polyimide passivation technology
- Epoxy resin molding,compact encapsulation
- ROHS compliant

DEVICE ELECTRICAL CHARACTERISTICS (25°C ambient temperature unless stated otherwise)	CONDITIONS	SYMBOL	CL03-15T
Repetitive Peak Reverse Voltage		V_{RRM}	15KV
Average Forward Current		I_{AV}	300mA
Non-Repetitive Peak Forward Current		I_{FSM}	20A
Allowable Junction Temperature		T_j	125°C
Storage Temperature Range		T_{stg}	-40~125°C
Maximum Forward Voltage Drop	$I_F=300\text{mA}, T_a=25^{\circ}\text{C}$	V_F	35.0V
Maximum Reverse Recovery Time	$I_F=10\text{mA} I_R=20\text{mA}$	trr	100nS
Maximum Reverse Current	$V_R=V_{RRM}, T_a=25^{\circ}\text{C}$	I_{R1}	2.0μA

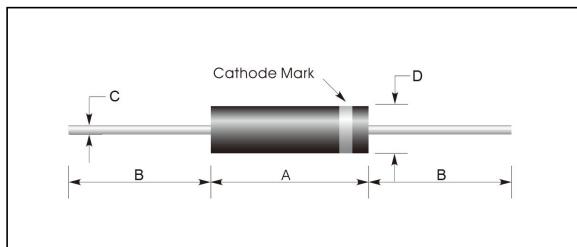

SYMBOL	CL03-15T (Unit : mm)
A	22.0
D	Φ7.5
B	22
C	Φ1.2