



T-2 Telephone Slide Base - Type 3

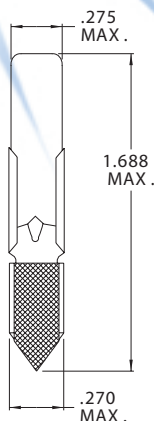

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|-------|------------|---------------|
| CM24D | 24.0 | .100 | 1,500 | 5,000 | C-7A |
| CM24E | 24.0 | .035 | 600 | 7,000 | C-2F |
| CM24F | 24.0 | .090 | 1,120 | 7,000 | C-2F |
| CM24H | 24.0 | .020 | 100 | 10,000 | C-2F |
| CM24X | 24.0 | .035 | 600 | 8,000 | C-2F |
| CM30A | 30.0 | .072 | 2,000 | 3,000 | C-7A |
| CM30C | 30.0 | .038 | 1,000 | 4,000 | C-2F |
| CM32B | 32.0 | .040 | 1,600 | 3,500 | C-2F |
| CM30B | 35.0 | .100 | 3,000 | 4,000 | C-7A |
| CM35A | 35.0 | .040 | 1,000 | 7,500 | C-2F |
| CM35B | 35.0 | .072 | 700 | 5,000 | C-7A |
| CM35C | 35.0 | .100 | 750 | 5,000 | C-7A |
| CM40A | 40.0 | .072 | 480 | 5,000 | C-7A |
| CM44A | 44.0 | .072 | 1,250 | 1,000 | C-7A |
| CM48A | 48.0 | .072 | 2,000 | 5,000 | C-7A |
| CM48B | 48.0 | .100 | 2,200 | 10,000 | C-7A |
| CM48C | 48.0 | .035 | 400 | 7,000 | C-7A |
| CM48D | 48.0 | .021 | 100 | 20,000 | C-7A |
| CM48G | 48.0 | .052 | 800 | 5,000 | C-7A |
| CM48H | 48.0 | .045 | 1,000 | 5,000 | C-7A |
| CM55B | 55.0 | .100 | 1,800 | 5,000 | C-7A |
| CM55C | 55.0 | .050 | 1,400 | 5,000 | C-7A |
| CM60A | 60.0 | .050 | 1,600 | 5,000 | C-7A |

T-2 Miniature Bayonet Base



| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|-------|------------|---------------|
| CM6MB | 6.0 | .140 | 550 | 20,000 | C-2V |
| CM12MB | 12.0 | .170 | 2,000 | 12,000 | C-2F |
| CM24MB | 24.0 | .073 | 3,000 | 10,000 | C-2F |
| CM28MB | 28.0 | .040 | 1,600 | 5,000 | C-2F |
| CM48MB | 48.0 | .053 | 1,800 | 10,000 | C-7A |
| CM60MB | 60.0 | .050 | 2,200 | 7,500 | C-7A |
| CM120MB | 120.0 | .025 | 1,200 | 5,000 | CC-7A |
| CM8-967 | 120.0 | .025 | 1,200 | 5,000 | CC-7A |