



RoHS Compliant Product

A suffix of "-C" specifies halogen-free and RoHS Compliant

D5-25SB

FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- This Series is UL listed under the Recognized Component index, file number E231047
- Single-in-line package
- High current capacity with small package
- Superior thermal conductivity
- High temperature soldering guaranteed : 260°C / 10 seconds
- High IFSM

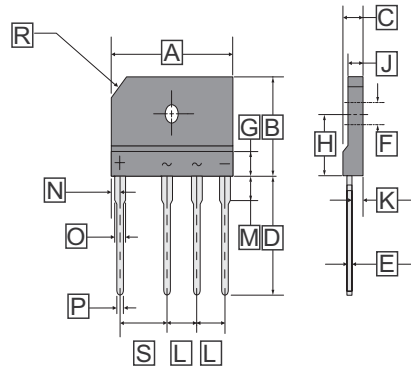

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	29.7	30.3	K	2.6	2.8
B	19.7	20.3	L	7.3	7.7
C	4.4	4.8	N	2.3	2.7
D	17.0	18.0	P	0.9	1.1
E	0.6	0.8	O	2.0	2.4
G	5 REF.		R	3 X 45°	
J	3.4	3.8	S	9.8	10.2
F	3.3	3.7	H	10.8	11.2

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETERS	SYMBOL	PART NUMBERS						UNITS	
		D5SB 10	D5SB 20	D5SB 40	D5SB 60	D5SB 80	D5SB 100		
		RBV 602S	RBV 603S	RBV 604S	RBV 605S	RBV 606S	RBV 607S		
Maximum repetitive voltage	V_{RM}	100	200	400	600	800	1000	V	
Maximum DC reverse current at $@T_A=25^\circ\text{C}$ rated DC blocking voltage $@T_A=125^\circ\text{C}$	I_R	10						μA	
Average rectified forward current 60Hz Sine wave Resistance load $@T_C=100^\circ\text{C}$ $@T_A=25^\circ\text{C}$	I_O	6 ⁽¹⁾						A	
		2.8 ⁽²⁾							
Peak Forward Surge Current 10ms single half sine-wave superimposed on rated load	I_{FSM}	150						A	
Maximum Instantaneous Forward Voltage @ 3.0A	V_F	1.1						V	
Dielectric strength terminals to case, AC 1 minute Current 1mA	V_{dia}	2.5						KV	
Maximum thermal Resistance per leg	on P.C.B without heat-sink	$R_{\theta JA}$	22 ⁽²⁾						$^\circ\text{C} / \text{W}$
	on Al plate heat-sink	$R_{\theta JC}$	3.4 ⁽¹⁾						
Operating and Storage Temperature Range	T_J, T_{STG}	150, -40 ~ 150						$^\circ\text{C}$	
Mounting torque	Tor	Rating Torque : 0.8N.m						N.m	

Notes :

- (1) Unit case mounted on Al plate heat-sink
- (2) Unites mounted on P.C.B. without heat-sink
- (3) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw {heat-sink size : 10.5 * 8.2 * 0.3cm}

CHARACTERISTIC CURVES

Fig.1 derating Curve

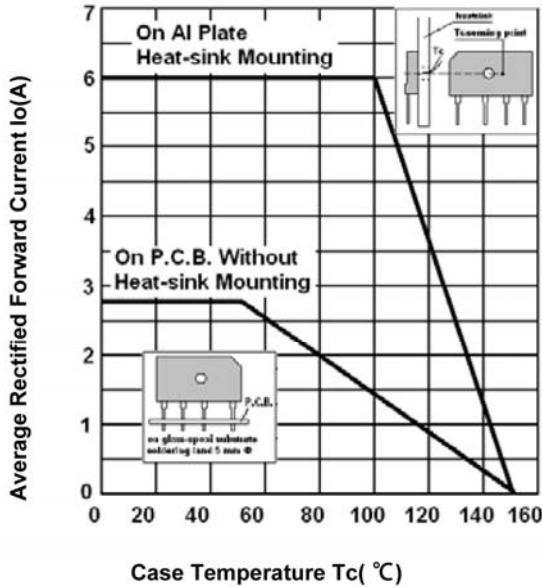


Fig.3 Peak Surge Forward capability

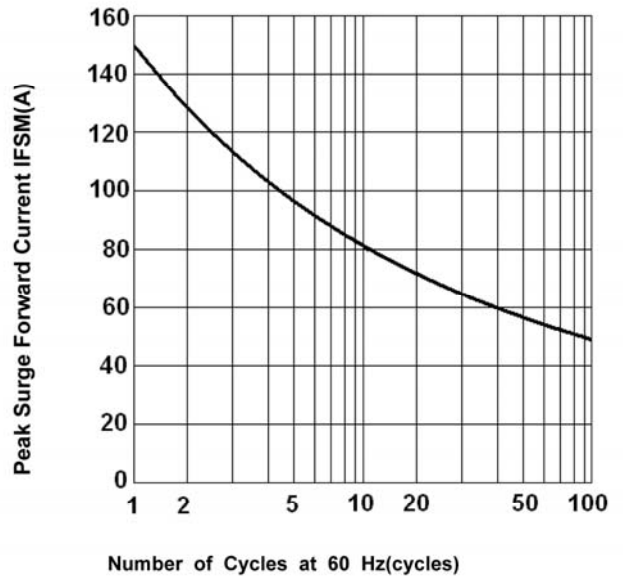


Fig.2 Typical Reverse Characteristics

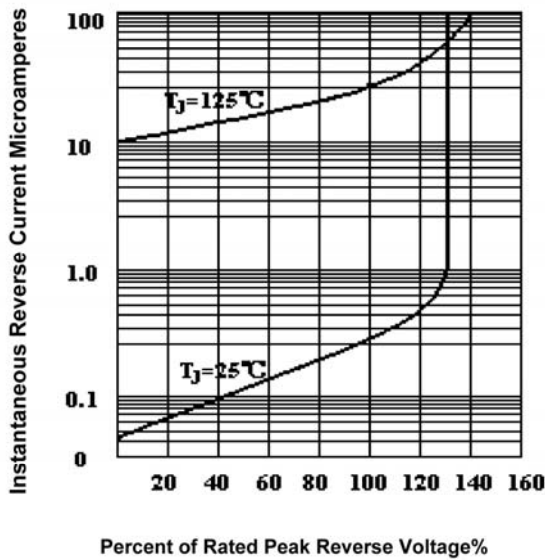


Fig.4 Forward Voltage

