
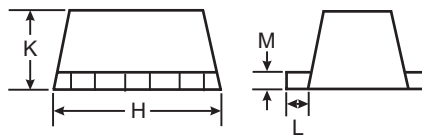


Features

- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDC)
- Built-In Biasing Resistors
- **Lead Free By Design/RoHS Compliant (Note 3)**

Mechanical Data


- Case: SOT-563
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Weight: 0.005 grams (approx.)



SEE NOTE 1

SOT-563			
Dim	Min	Max	Typ
A	0.15	0.30	0.25
B	1.10	1.25	1.20
C	1.55	1.70	1.60
D	0.50		
G	0.90	1.10	1.00
H	1.50	1.70	1.60
K	0.56	0.60	0.60
L	0.15	0.25	0.20
M	0.10	0.18	0.11
All Dimensions in mm			

P/N	R1	R2	MARKING
DDA124EH	22K Ω	22K Ω	P17
DDA144EH	47K Ω	47K Ω	P20
DDA143EH	4.7K Ω	4.7K Ω	P08
DDA114YH	10K Ω	47K Ω	P14
DDA123JH	2.2K Ω	47K Ω	P06
DDA114EH	10K Ω	10K Ω	P13
DDA143TH	4.7K Ω	-	P07
DDA114TH	10K Ω	-	P12

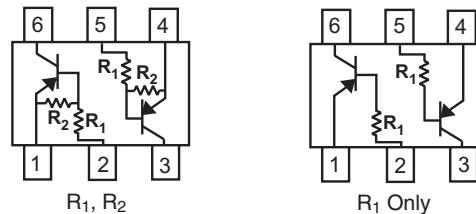

SCHEMATIC DIAGRAM, TOP VIEW

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage (6) to (1) and (3) to (4)	V _{CC}	-50	V
Input Voltage (2) to (1) and (5) to (4)	V _{IN}	DDA124EH DDA144EH DDA143EH DDA114YH DDA123JH DDA114EH DDA143TH DDA114TH +10 to -40 +10 to -40 +10 to -30 +6 to -40 +5 to -12 +10 to -40 +5 V _{max} +5 V _{max}	V
Output Current	I _O	DDA124EH DDA144EH DDA143EH DDA114YH DDA123JH DDA114EH DDA143TH DDA114TH -30 -30 -100 -70 -100 -50 -100 -100	mA
Output Current	I _C (Max)	All	-100 mA
Power Dissipation	P _d	150	mW
Thermal Resistance, Junction to Ambient Air (Note 2)	R _{θJA}	833	°C/W
Operating and Storage and Temperature Range	T _J , T _{STG}	-55 to +150	°C

- Note:
1. Package is non-polarized. Parts may be on reel in orientation illustrated, 180° rotated, or mixed (both ways).
 2. Mounted on FR4 Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. No purposefully added lead.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic (DDA143TH & DDA114TH only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV _{CBO}	-50	—	—	V	I _C = -50μA
Collector-Emitter Breakdown Voltage	BV _{CEO}	-50	—	—	V	I _C = -1mA
Emitter-Base Breakdown Voltage	BV _{EBO}	-5	—	—	V	I _E = -50μA
Collector Cutoff Current	I _{CBO}	—	—	-0.5	μA	V _{CB} = -50V
Emitter Cutoff Current	I _{EBO}	—	—	-0.5	μA	V _{EB} = -4V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	—	—	-0.3	V	I _C /I _B = -2.5mA / -0.25mA I _C /I _B = -1mA / -0.1mA DDA143TH DDA114TH
DC Current Transfer Ratio	h _{FE}	100	250	600	—	I _C = -1mA, V _{CE} = -5V
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = -10V, I _E = 5mA, f = 100MHz

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition	
Input Voltage	V _{I(off)}	DDA124EH	-0.5	-1.1	—	V	V _{CC} = -5V, I _O = -100μA
		DDA144EH	-0.5	-1.1			
Input Voltage	V _{I(on)}	DDA143EH	-0.5	-1.1	—	V	V _O = -0.3V, I _O = -5mA
		DDA114YH	-0.3	—			
Input Voltage	V _{I(on)}	DDA123JH	-0.5	—	—	V	V _O = -0.3V, I _O = -2mA
		DDA114EH	-0.5	-1.1			
Output Voltage	V _{O(on)}	DDA124EH	—	-1.9	-3.0	V	V _O = -0.3V, I _O = -20mA
		DDA144EH	—	-1.9	-3.0		
Output Voltage	V _{O(on)}	DDA143EH	—	—	-1.4	V	V _O = -0.3V, I _O = -1mA
		DDA114YH	—	—	-1.1		
Output Voltage	V _{O(on)}	DDA123JH	—	-1.9	-3.0	V	V _O = -0.3V, I _O = -5mA
		DDA114EH	—	-1.9	-3.0		
Output Voltage	V _{O(on)}	DDA124EH	—	-0.1	-0.3	V	I _O /I _I = -10mA / -0.5mA
		DDA144EH	—	-0.1	-0.3		
Output Voltage	V _{O(on)}	DDA143EH	—	-0.1	-0.3	V	I _O /I _I = -10mA / -0.5mA
		DDA114YH	—	-0.1	-0.3		
Output Voltage	V _{O(on)}	DDA123JH	—	-0.1	-0.3	V	I _O /I _I = -5mA / -0.25mA
		DDA114EH	—	-0.1	-0.3		
Input Current	I _I	DDA124EH	—	—	-0.36	mA	V _I = -5V
		DDA144EH	—	—	-0.18		
Input Current	I _I	DDA143EH	—	—	-1.8	mA	V _I = -5V
		DDA114YH	—	—	-0.88		
Input Current	I _I	DDA123JH	—	—	-3.6	mA	V _I = -5V
		DDA114EH	—	—	-0.88		
Output Current	I _{O(off)}	—	—	-0.5	μA	V _{CC} = -50V, V _I = -0V	
DC Current Gain	G _I	DDA124EH	56	—	—	—	V _O = -5V, I _O = -5mA
		DDA144EH	68	—	—		
DC Current Gain	G _I	DDA143EH	20	—	—	—	V _O = -5V, I _O = -10mA
		DDA114YH	68	—	—		
DC Current Gain	G _I	DDA123JH	80	—	—	—	V _O = -5V, I _O = -10mA
		DDA114EH	30	—	—		
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = -10V, I _E = -5mA, f = 100MHz	


* Transistor - For Reference Only

Ordering Information (Note 4)

Device	Packaging	Shipping
DDA124EH-7	SOT-563	3000/Tape & Reel
DDA144EH-7	SOT-563	3000/Tape & Reel
DDA143EH-7	SOT-563	3000/Tape & Reel
DDA114YH-7	SOT-563	3000/Tape & Reel
DDA123JH-7	SOT-563	3000/Tape & Reel
DDA114EH-7	SOT-563	3000/Tape & Reel
DDA143TH-7	SOT-563	3000/Tape & Reel
DDA114TH-7	SOT-563	3000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information




PXX = Product Type Marking Code (See Page 1)
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

Year	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	P	R	S	T	U	V	W	X	Y	Z


Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDA143EH

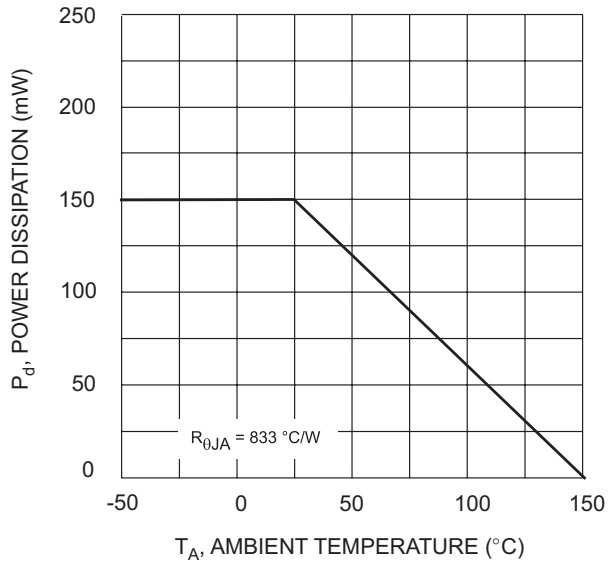


T_A , AMBIENT TEMPERATURE ($^{\circ}C$)

Fig. 1 Derating Curve

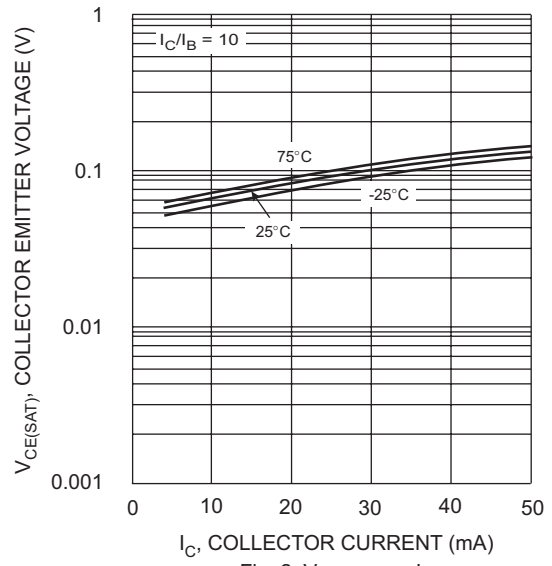


I_C , COLLECTOR CURRENT (mA)

Fig. 2 $V_{CE(SAT)}$ vs. I_C

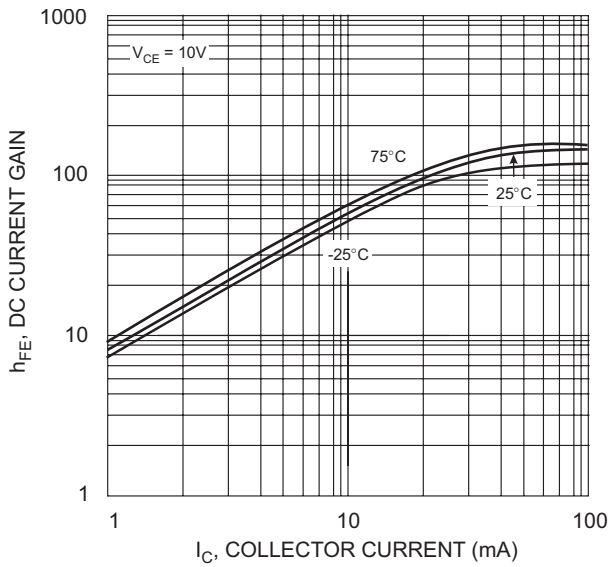


I_C , COLLECTOR CURRENT (mA)

Fig. 3 DC Current Gain

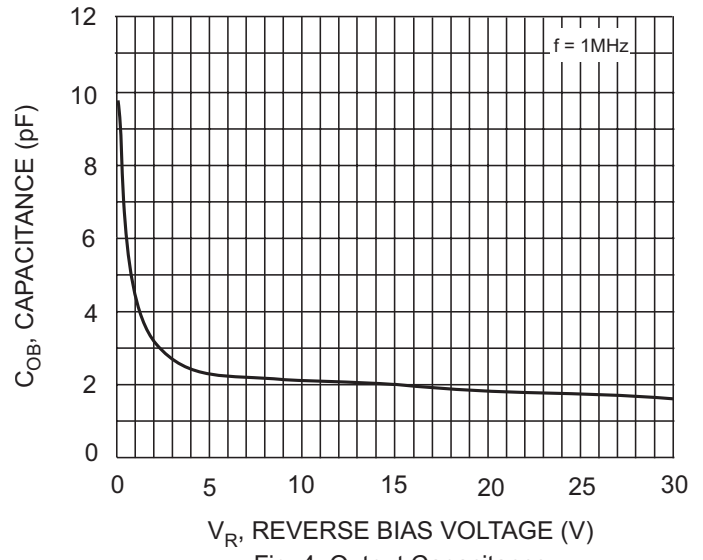


V_R , REVERSE BIAS VOLTAGE (V)

Fig. 4 Output Capacitance

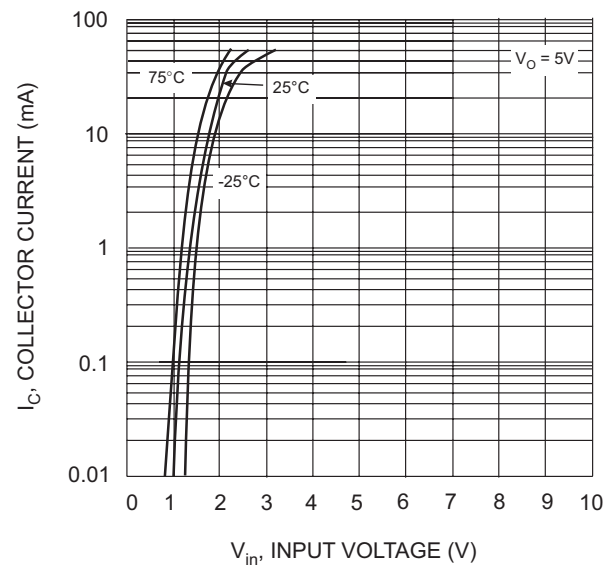

V_{in} , INPUT VOLTAGE (V)

Fig. 5 Collector Current Vs. Input Voltage

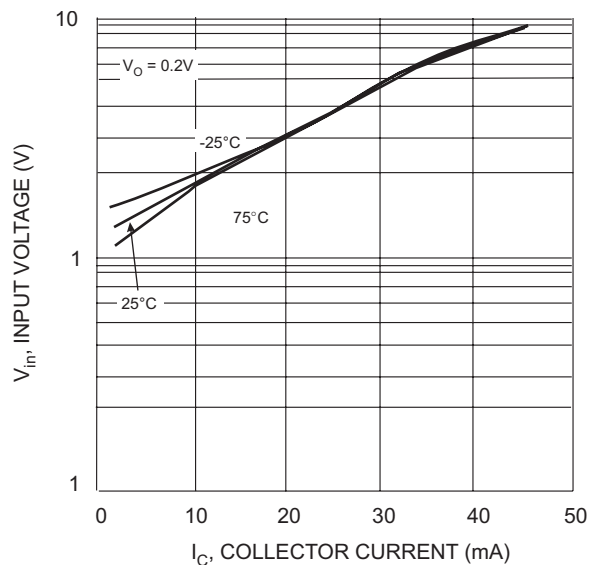

I_C , COLLECTOR CURRENT (mA)

Fig. 6 Input Voltage vs. Collector Current

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.