

Surface Mount Schottky Barrier Rectifier  
 Reverse Voltage - 20 to 200 V  
 Forward Current - 2.0A

### Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

### MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View

Marking Code: DS22W ---K22  
 DS24W ---K24  
 DS26W ---K26  
 DS28W ---K28  
 DS210W ---K210  
 DS212W ---K212  
 DS215W ---K215  
 DS220W ---K220

Simplified outline SOD-123FL and symbol


### Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %


Parameter	Symbols	DS22W	DS24W	DS26W	DS28W	DS210W	DS212W	DS215W	DS220W	Units					
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	40	60	80	100	120	150	200	V					
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	56	70	84	105	140	V					
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	40	60	80	100	120	150	200	V					
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>	2.0							A						
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>	50				40				A					
Max Instantaneous Forward Voltage at 2 A	V <sub>F</sub>	0.55		0.70		0.85		0.95		V					
Maximum DC Reverse Current T <sub>a</sub> = 25°C at Rated DC Reverse Voltage T <sub>a</sub> = 100°C	I <sub>R</sub>	0.5 5			0.3 5										
Typical Junction Capacitance <sup>1)</sup>	C <sub>j</sub>	220		80											
Operating Junction Temperature Range	T <sub>j</sub>	-55 ~ +125							°C						
Storage Temperature Range	T <sub>stg</sub>	-55 ~ +150							°C						

1) Measured at 1MHz and applied reverse voltage of 4 V D.C.


**Fig.1 Forward Current Derating Curve**

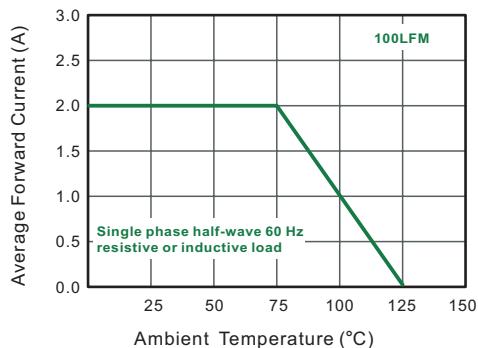


**Fig.2 Typical Reverse Characteristics**

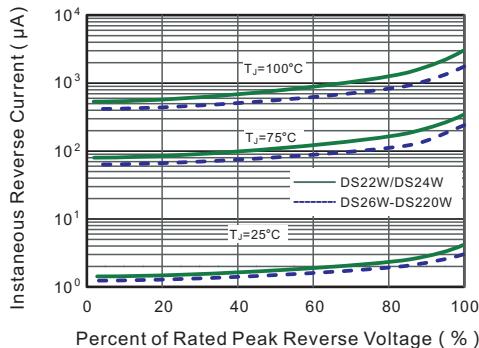


**Fig.3 Typical Forward Characteristic**

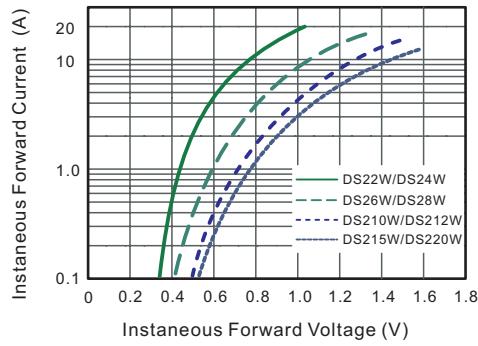

**Fig.4 Typical Junction Capacitance**

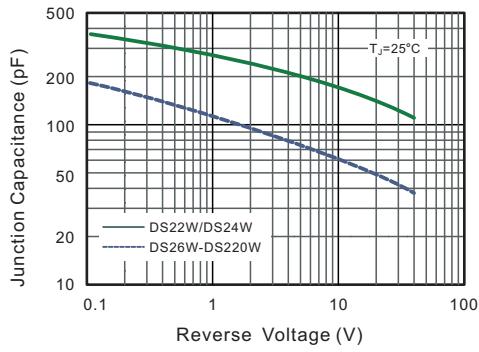


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

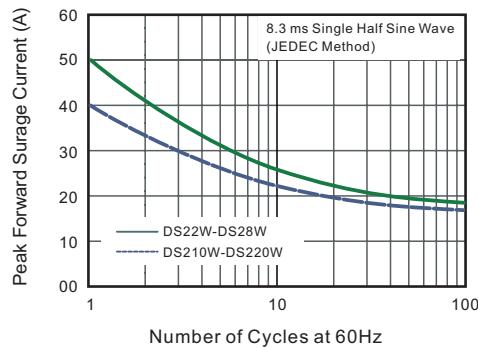


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123FL

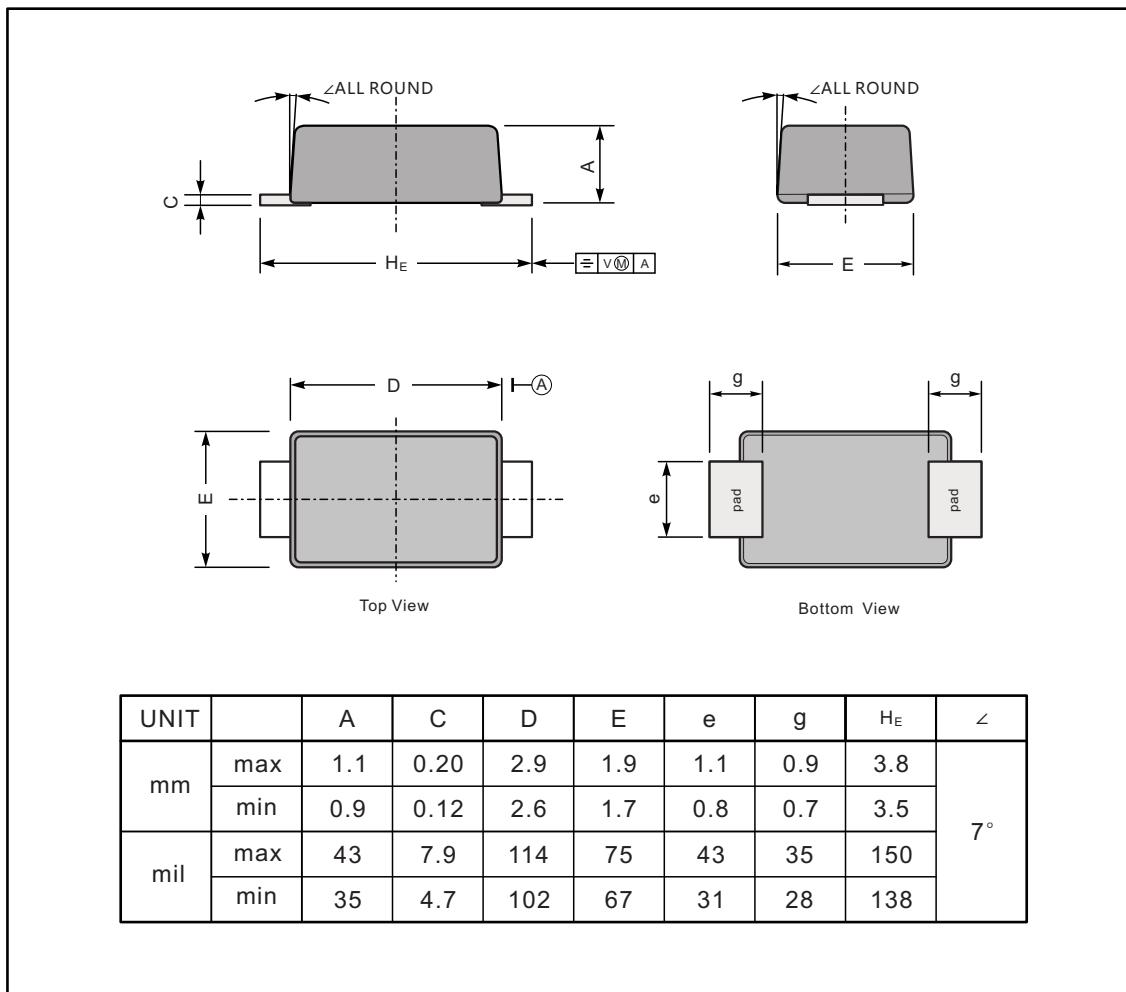

### The recommended mounting pad size

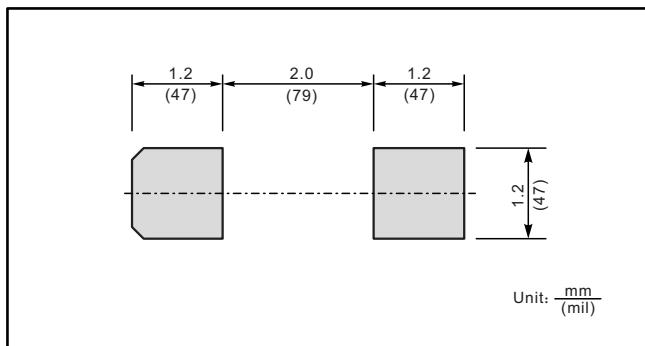

### Marking

Type number	Marking code
DS22W	K22
DS24W	K24
DS26W	K26
DS28W	K28
DS210W	K210
DS212W	K212
DS215W	K215
DS220W	K220