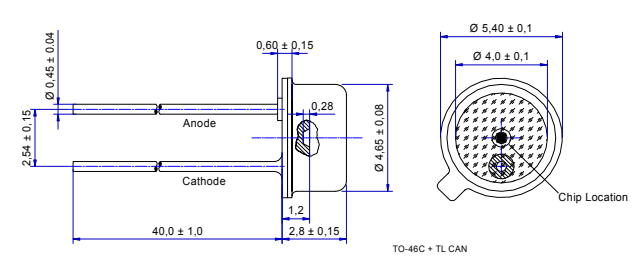


Radiation	Type	Technology	Case
Infrared	DDH	AlGaAs/AlGaAs	TO-46

	Description
	<p>High-power, high-speed infrared LED in hermetically sealed TO-46 package, mounted on reflector header for beam forming</p> <p>Note: Special packages with standoff available on request</p>
<p><b>Applications</b></p> <p>Optical communications, safety equipment, automation, optical sensors, encoders</p>	

### Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current (DC)		$I_F$	100	mA
Peak forward current	$(t_p \leq 50 \mu\text{s}, t_p/T = 1/2)$	$I_{FM}$	200	mA
Power dissipation		$P_D$	220	mW
Operating temperature range		$T_{amb}$	-40 to +100	$^{\circ}\text{C}$
Storage temperature range		$T_{stg}$	-55 to +100	$^{\circ}\text{C}$
Junction temperature		$T_J$	100	$^{\circ}\text{C}$

### Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 20 \text{ mA}$	$V_F$		1.6	1.9	V
Forward voltage*	$I_F = 100 \text{ mA}$	$V_F$		1.7		V
Reverse voltage	$I_R = 10 \mu\text{A}$	$V_F$	5			V
Radiant power	$I_F = 20 \text{ mA}$	$\Phi_e$	1.5	2.5		mW
Radiant power*	$I_F = 100 \text{ mA}$	$\Phi_e$		10		mW
Radiant intensity	$I_F = 20 \text{ mA}$	$I_e$	1.5	2		mW/sr
Radiant intensity*	$I_F = 100 \text{ mA}$	$I_e$		8		mW/sr
Peak wavelength	$I_F = 100 \text{ mA}$	$\lambda_p$	800	810	820	nm
Spectral bandwidth at 50%	$I_F = 100 \text{ mA}$	$\Delta\lambda_{0.5}$		35		nm
Viewing angle	$I_F = 100 \text{ mA}$	$\varphi$		90		deg.
Switching time	$I_F = 100 \text{ mA}$	$t_r, t_f$		40		ns

\*measured after 30s current flow

Note: All measurements carried out on *EPIGAP* equipment

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

**EPIGAP** Optoelektronik GmbH, D-12555 Berlin, Köpenicker Str.325 b, Haus 201

Tel.: +49-30-6576 2543, Fax : +49-30-6576 2545