

EPA3338S & EPA3338S-RC




- For use with 75 Ω Coaxial Cable
- Add “-RC” after part number for RoHS Compliant
- Storage Temperature : -40°C to +125°C
- Operating Temperature : 0°C to +70°C
- Available in Tubes or T/R Package
- 2000 Vrms Minimum Isolation


Electrical Parameters @ 25° C

Inductance (μH Min.)	Leakage Inductance (μH Max.)	Interwinding Capacitance (pF Max.)	DCR (Ω Max.)	Rise Time (nS Max.)
@ 100 KHz , 0.1 Vrms	@ 100 KHz , 0.1 Vrms	@ 100 KHz , 0.1 Vrms		@ 20% - 80%
7.5	0.1	5	0.20	0.5
	Pins 1-3 or 6-8 w/ 16-14,11-9 shorted	Winding to Winding		

Package

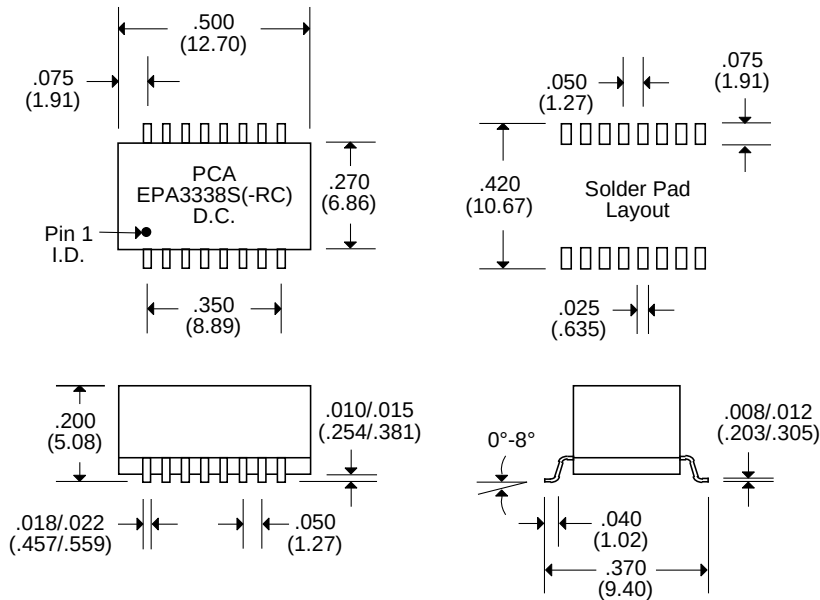

Schematic



Notes :	EPA3338S	EPA3338S-RC
1. Lead Finish	SnPb	Hot Tin Dip (Sn)
2. Peak Temperature Rating	225°C	245°C
3. Moisture Sensitive Levels	MSL = 3 (168 Hours, ≤30°C/60%RH)	MSL = 4 (72 Hours, ≤30°C/60%RH)
4. Weight	1 gram	1 gram
5. Packaging Information		
(Tube)	43 pieces/tube	43 pieces/tube
(Tape & Reel)	300 pieces/13" reel	300 pieces/13" reel

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25