



## Silicon Fast Recovery Bridge Rectifier

DIM.	INCHES		MILLIMETER	
	MIN.	MAX.	MIN.	MAX.
A	0.405	0.445	10.5	11.3
B	0.58	0.62	14.7	15.75
C	0.142	0.158	3.6	4.0
D	0.047	0.127	1.2	3.2
E	0.75		19.1	
F	0.038	0.042	0.97	1.1
G	0.23	0.27	5.8	6.9

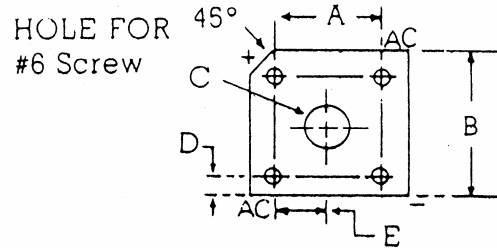

BR600  
(PLASTIC)



PART NUMBER	MAX. AVG. RECTIFIED CURRENT $I_f$ (AV) @ TaR LOAD		INPUT VOLTAGE RECOMMENDED $V_{rms}$	PIV $V_{rrm}$	MAX. FORWARD PEAK SURGE CURRENT $I_{fsm}$	MAX. FORWARD VOLTAGE @ $T_a = 25^\circ C$ $V_f @ I_f$ (AV)		MAX. REVERSE CURRENT @ $T_a = 25^\circ C$ $I_r$	$T_{rr}$
	(A)	( $^\circ C$ )				(V)	(A)		
FBR600	6.0	50	20	50	150	1.3	3.0	10	150
FBR601	6.0	50	40	100	150	1.3	3.0	10	150
FBR602	6.2	50	80	200	150	1.3	3.0	10	150
FBR604	6.2	50	125	400	150	1.3	3.0	10	150
FBR606	6.2	50	250	600	150	1.3	3.0	10	250
FBR608	6.2	50	380	800	150	1.3	3.0	10	500
FBR610	6.2	50	440	1000	150	1.3	3.0	10	500

THE PLASTIC MATERIAL CARRIES U/L RECOGNITION 94V-0

(203) 467-2591 TEL  
(203) 469-5928 FAX  
Email: Info@edal.com  
Internet: <http://www.edal.com>

***EDAL*** industries, inc.

51 Commerce St. East Haven, CT 06512