

Helping Customers Innovate, Improve & Grow



## Description

The FX-500 is a complete crystal-based frequency translator used in communications applications where low jitter is paramount. Performance advantages include superior jitter performance, high output frequencies and small package size. Advanced custom ASIC technology results in a highly robust, reliable and predictable device. The device is packaged in a 6 pin J-Lead ceramic package with a hermetic seam welded lid.

## Features

- Complete Frequency Translator to 77.760 MHz
- 3.3 Volt or 5.0 Volt Supply
- Capable of locking to an 8kHz pulse/ BITS clock
- Tri-State Output allows board test
- Lock Detect
- J-lead Ceramic Package
- Advanced Custom ASIC Technology
- Absolute Pull Range Performance to  $\pm 100$  ppm
- CMOS output
- Commercial or Industrial Temperature Range
- EIA Compatible Tape and Reel Packaging

## Applications

- Frequency Translation, Clock Smoothing
- Telecom - SONET/SDH/ATM
- Datacom - DSLAM, DSLAR, Access Nodes
- Cable Modem Head End
- Base Station - GSM, CDMA

## Block Diagram

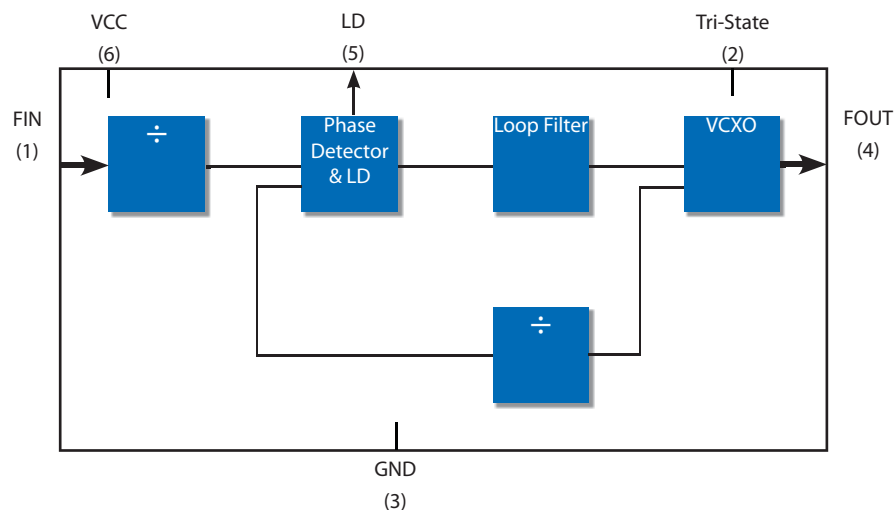


Figure 1. Functional block diagram

# Performance Specifications

| Table 1. Electrical Performance   |           |                    |         |                    |       |
|-----------------------------------|-----------|--------------------|---------|--------------------|-------|
| Parameter                         | Symbol    | Min                | Typical | Maximum            | Units |
| Frequency                         |           |                    |         |                    |       |
| Input Frequency                   | $F_{IN}$  | 0.001              |         | 77.76              | MHz   |
| Capture Range (Ordering Option)   | APR       | $\pm 50$           |         | $\pm 100$          | ppm   |
| Output Frequency                  | $F_{OUT}$ | 1.0                |         | 77.76              | MHz   |
| Supply <sup>1</sup>               |           |                    |         |                    |       |
| Voltage (Ordering Option)         | $V_{DD}$  | 3.0                | 3.3     | 3.6                | V     |
| Current (No Load)                 | $V_{DD}$  | 4.5                | 5.0     | 5.5                | V     |
|                                   | $I_{DD}$  |                    |         | 40                 | mA    |
| Input Signal                      |           |                    |         |                    |       |
| Input Low Level Voltage           | $V_{IL}$  |                    |         | $0.3 \cdot V_{DD}$ | V     |
| Input High Level Voltage          | $V_{IH}$  | $0.7 \cdot V_{DD}$ |         |                    | V     |
| Pulse Width                       |           | 6                  |         |                    | ns    |
| Output <sup>2</sup>               |           |                    |         |                    |       |
| Output High Level Voltage         | $V_{OH}$  | $0.9 \cdot V_{DD}$ |         |                    | V     |
| Output Low Level Voltage          | $V_{OL}$  |                    |         | $0.1 \cdot V_{DD}$ | V     |
| Rise Time                         | $t_R$     |                    | 1.8     | 3.0                | ns    |
| Fall Time                         | $t_F$     |                    | 1.8     | 3.0                | ns    |
| Duty Cycle <sup>3</sup>           | D         |                    |         |                    | %     |
| ≤ 60 MHz                          |           | 45                 |         | 55                 | %     |
| > 60MHz                           |           | 40                 |         | 60                 | %     |
| Leakage Current of Input          | $I_C$     | -1                 |         | 1                  | μA    |
| Loop Bandwidth (-3dB), 8kHz input | BW        |                    | 10      |                    | Hz    |
| Jitter, 8kHz to 77.76MHz          |           |                    |         |                    |       |
| rms                               |           |                    | 4.7     |                    | ps    |
| p-p                               |           |                    | 44      |                    | ps    |
|                                   |           |                    | 0.003   |                    | UI    |

1. A 0.1 μF low frequency tantalum bypass capacitor in parallel with a 0.01 μF high frequency ceramic capacitor is recommended.
2. Figure 2 defines the waveform parameters. Figure 3 illustrates the standard test conditions under which these parameters are specified and tested.
3. Duty cycle is defined as (on time÷period), with  $V_S = V_{DD}/2$ , per figure 2. Duty cycle is measured with a 15pf load per figure 3.
4. Other frequencies may be available, please contact factory.

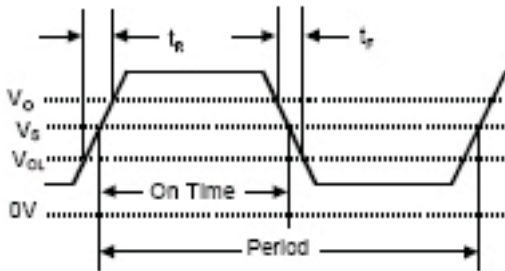


Figure 2. Output Waveform

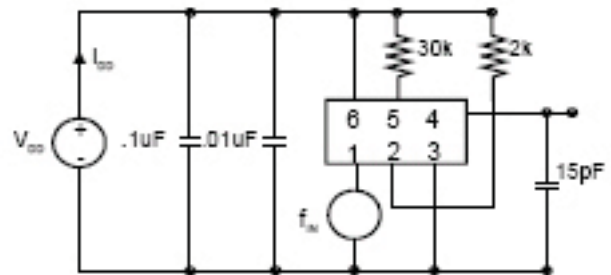


Figure 3. Output Test Conditions (25 ± 5°C)

## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied at these or any other conditions in excess of conditions represented in the operational sections of this data sheet. Exposure to the maximum ratings for the extended periods may adversely affect device reliability.

Table 2. Absolute Maximum Ratings

| Parameter           | Symbol    | Ratings    | Unit |
|---------------------|-----------|------------|------|
| Power Supply        | $V_{DD}$  | 7          | V    |
| Storage Temperature | $T_{STR}$ | -55 to 125 | °C   |

## Reliability

The FX-500 is capable of meeting the following qualification tests

Table 3. Environmental Compliance

| Parameter            | Conditions                |
|----------------------|---------------------------|
| Mechanical Shock     | MIL-STD-883, M2002/TEST A |
| Mechanical Vibration | MIL-STD-883, M2007/TEST A |
| Lead Solderability   | MIL-STD-883, M2003        |
| Gross and Fine Leak  | MIL-STD-883, M1014        |

## Handling Precautions

Although ESD protection circuitry has been designed into the the FX-424, proper precautions should be taken when handling and mounting. VI employs a human body model and a charged-device model (CDM) for ESD susceptibility testing and design protection evaluation. ESD thresholds are dependent on the circuit parameters used to define the model. Although no industry wide standard has been adopted for the CDM, a standard HBM of resistance=1.5Kohms and capacitance = 100pF is widely used and therefore can be used for comparison purposes

Table 4. Predicted ESD Ratings

| Model                | Minimum | Conditions               |
|----------------------|---------|--------------------------|
| Human Body Model     | 1000 V  | MIL-STD 883, Method 3015 |
| Charged Device Model | 1000 V  | JEDEC, JESD22-C101       |

Table 5. Reflow Profile (IPC/JEDEC J-STD-020C)

| Parameter                | Symbol      | Value                   |
|--------------------------|-------------|-------------------------|
| PreHeat Time             | $t_s$       | 60 sec Min, 180 sec Max |
| Ramp Up                  | $R_{UP}$    | 3 °C/sec Max            |
| Time Above 217 °C        | $t_L$       | 60 sec Min, 150 sec Max |
| Time To Peak Temperature | $t_{AMB-P}$ | 480 sec Max             |
| Time At 260 °C           | $t_p$       | 20 sec Min, 40 sec Max  |
| Ramp Down                | $R_{DN}$    | 6 °C/sec Max            |

The device has been qualified to meet the JEDEC standard for Pb-Free assembly. The temperatures and time intervals listed are based on the Pb-Free small body requirements. The temperatures refer to the topside of the package, measured on the package body surface. The FX-500 device is hermetically sealed so an aqueous wash is not an issue.

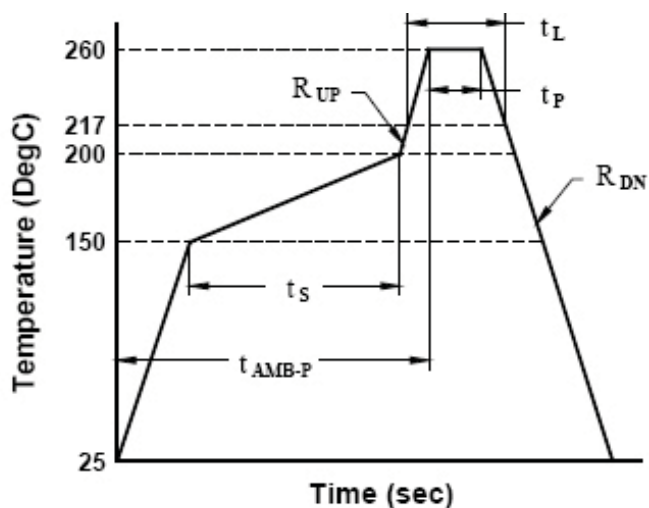


Figure 4. Suggested IR Profile

Table 6. Tape and Reel Information

| Tape Dimensions (mm) |      |     |   |    |      | Reel Dimensions (mm) |    |     |   |    |     |        |
|----------------------|------|-----|---|----|------|----------------------|----|-----|---|----|-----|--------|
| A                    | B    | C   | D | E  | F    | G                    | H  | I   | J | K  | L   | #/Reel |
| 24                   | 11.5 | 1.5 | 4 | 12 | 1.78 | 21                   | 13 | 100 | 5 | 25 | 330 | 200    |

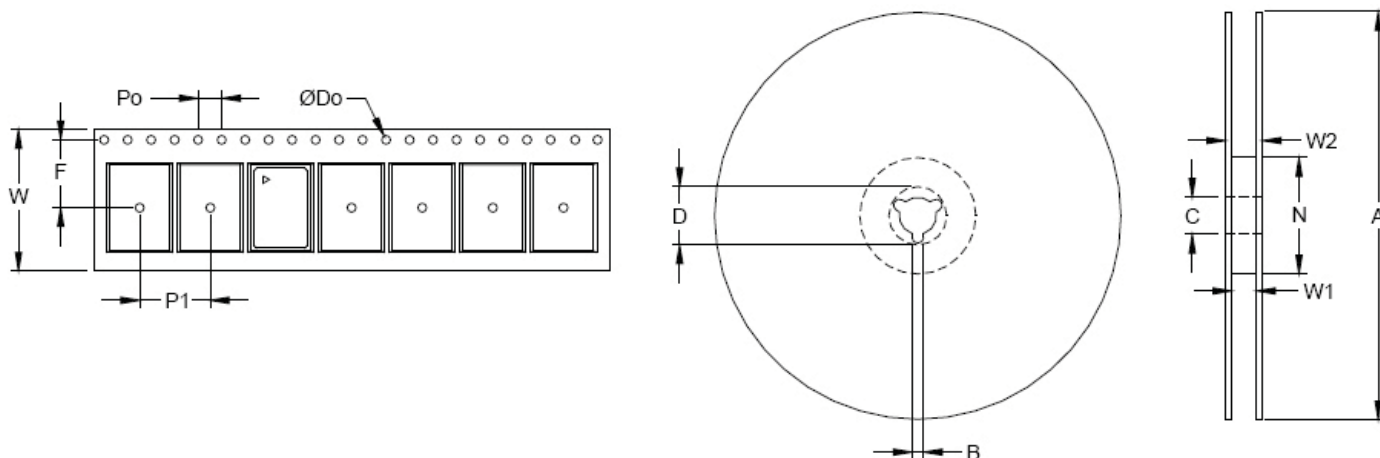


Figure 5. Tape and Reel

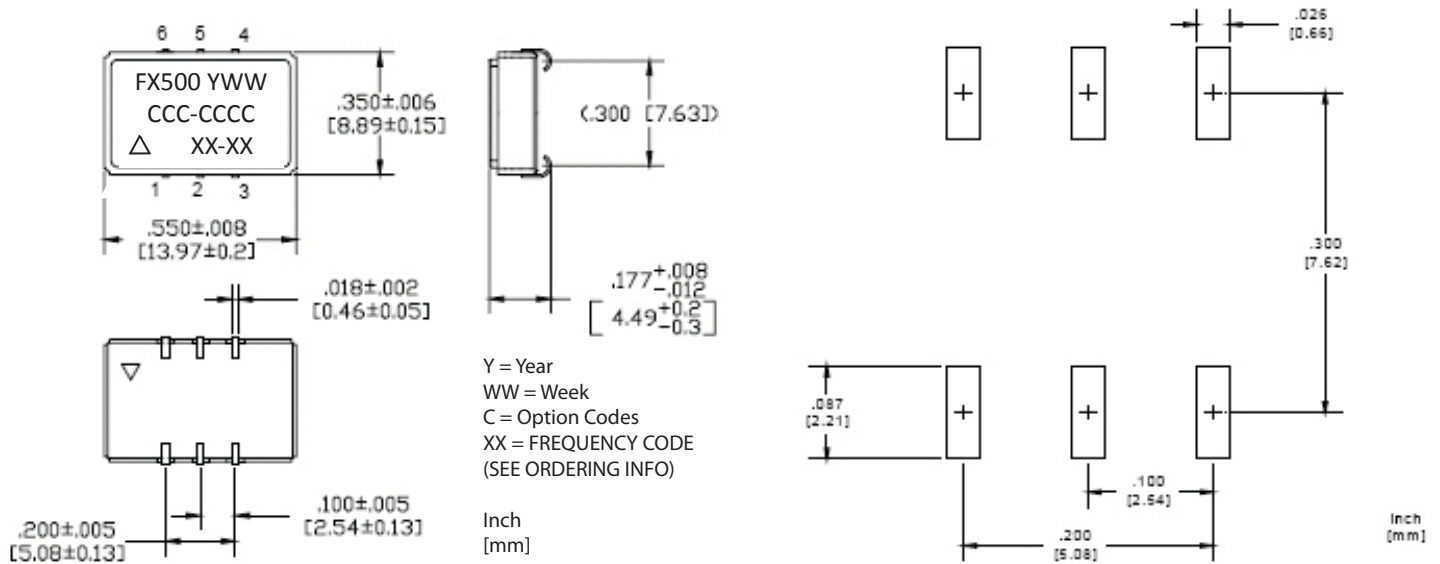


Figure 6. Outline Drawing and Pad Layout

| Table 7. Pin Functions |                        |   |
|------------------------|------------------------|---|
| Pin #                  | Symbol                 | Function  |
| 1                      | $f_{IN}$               | Input Frequency   |
| 2                      | Tri-State <sup>1</sup> | Logic Low = Output Disable<br>Logic High = Output Enabled |
| 3                      | GND                    | Case and Electrical Ground                                |
| 4                      | $f_o$                  | Output Frequency  |
| 5                      | LD <sup>2</sup>        | Lock Detect   |
| 6                      | $V_{DD}$               | Power Supply Voltage                                      |

1. Tristate is driven to logic high or logic low; there is no internal pull up or pull down resistor.
2. LD is an open collector output requiring a 30k ohm pullup resistor to VDD. LD output is logic high under locked condition, logic low for no input at  $f_{IN}$ , and for "out-of-lock" condition LD transitions between logic low and logic high at the phase detector

## Ordering Information

**Table 8. Standard Frequencies**

|        |    |        |    |         |    |         |    |         |    |         |    |
|--------|----|--------|----|---------|----|---------|----|---------|----|---------|----|
| 0.0010 | A1 | 1.0000 | BB | 9.2160  | CH | 19.6990 | DK | 32.7680 | H3 | 49.1520 | J7 |
| 0.0020 | AR | 1.0240 | B2 | 9.7200  | C8 | 19.7190 | DH | 33.0000 | H7 | 49.4080 | J2 |
| 0.0032 | AG | 1.2150 | BU | 9.7500  | CE | 19.9219 | ED | 33.3330 | HC | 50.0000 | JD |
| 0.0040 | A2 | 1.2288 | BK | 9.8304  | C1 | 20.0000 | E2 | 34.3680 | H6 | 50.0480 | KD |
| 0.0080 | A3 | 1.2500 | BG | 10.0000 | C4 | 20.1416 | E3 | 34.5600 | HB | 51.2000 | LL |
| 0.0095 | AU | 1.3333 | BF | 10.2300 | DP | 20.4800 | E4 | 36.8640 | HG | 51.8400 | J4 |
| 0.0100 | A6 | 1.5000 | BE | 10.2400 | DM | 20.5444 | EF | 37.0560 | H4 | 52.0000 | JP |
| 0.0156 | AL | 1.5360 | BV | 10.4143 | DV | 20.7135 | E1 | 37.1250 | H9 | 53.3300 | JU |
| 0.0157 | AD | 1.5440 | B3 | 10.4582 | DU | 20.8286 | EB | 37.5000 | HK | 54.7460 | JL |
| 0.0158 | AC | 1.9200 | B1 | 10.4872 | DN | 20.8286 | EG | 38.8800 | H5 | 55.0000 | JX |
| 0.0160 | A4 | 2.0000 | B8 | 10.9490 | DG | 20.9165 | EH | 39.0625 | HH | 60.0000 | JR |
| 0.0240 | BX | 2.0480 | B4 | 10.9500 | DJ | 21.0051 | EJ | 39.3216 | HD | 61.3800 | KY |
| 0.0250 | BR | 2.3040 | BD | 11.1840 | DF | 22.0000 | E9 | 39.8438 | HJ | 61.4400 | J5 |
| 0.0320 | BW | 2.4576 | BJ | 12.2880 | D8 | 22.1048 | EK | 40.0000 | JF | 62.2080 | J8 |
| 0.0400 | AP | 2.5000 | BM | 12.3077 | DY | 22.2171 | E5 | 40.2831 | KK | 62.5000 | J9 |
| 0.0441 | AA | 2.5575 | B9 | 12.3520 | D1 | 22.5792 | E8 | 40.9600 | J1 | 62.9145 | LE |
| 0.0480 | AB | 3.0880 | B6 | 12.8000 | D2 | 24.0000 | EC | 41.0889 | KM | 63.3600 | JJ |
| 0.0481 | AV | 3.2400 | BL | 13.0000 | D3 | 24.5760 | E6 | 41.6571 | KP | 63.8976 | JN |
| 0.0500 | BT | 3.2500 | BC | 13.5000 | DT | 24.7040 | E7 | 41.8329 | KT | 64.0000 | JT |
| 0.0640 | A5 | 3.3750 | BH | 14.8352 | DL | 25.0000 | F7 | 42.0000 | JB | 64.1520 | JH |
| 0.0800 | A9 | 3.8400 | B7 | 15.0000 | D4 | 25.1658 | F8 | 42.0102 | KV | 65.5360 | J6 |
| 0.1000 | AH | 4.0000 | BN | 15.0336 | DR | 25.6000 | F6 | 42.5000 | JC | 66.0000 | JA |
| 0.1280 | AX | 4.0960 | B5 | 15.3600 | DW | 25.9200 | F2 | 42.6600 | JZ | 70.0000 | KB |
| 0.2430 | A8 | 5.0000 | C6 | 16.0000 | D9 | 26.0000 | F3 | 44.2095 | KX | 70.6560 | KC |
| 0.2560 | AM | 5.1200 | CD | 16.3840 | D5 | 27.0000 | F4 | 44.4343 | LF | 71.6100 | KF |
| 0.3200 | AW | 6.1440 | CG | 17.1840 | DE | 27.6480 | FB | 44.6218 | JW | 73.7280 | K8 |
| 0.3840 | AY | 6.2914 | CC | 18.4320 | D7 | 28.7040 | F1 | 44.7360 | J3 | 74.1250 | K1 |
| 0.4000 | AF | 6.2915 | CF | 18.5280 | DC | 29.4912 | F5 | 44.9280 | JE | 74.1758 | KA |
| 0.4800 | AK | 6.3120 | C7 | 18.7500 | EE | 29.5000 | F9 | 45.1584 | JG | 74.2500 | K7 |
| 0.5000 | BP | 6.4800 | C2 | 19.2000 | DD | 30.0000 | HE | 45.8240 | JM | 75.0000 | KH |
| 0.5120 | AJ | 6.7500 | CB | 19.3927 | DX | 30.7200 | H1 | 46.0379 | LG | 76.8000 | K4 |
| 0.6555 | AE | 7.6800 | C9 | 19.4400 | D6 | 30.8800 | HF | 46.7200 | JK | 77.7600 | K2 |
| 0.7720 | AT | 7.7760 | C5 | 19.5313 | DZ | 31.2500 | H8 | 46.8750 | JY |         |    |
| 0.9600 | A7 | 8.1920 | C3 | 19.6608 | DB | 32.0000 | H2 | 48.0000 | JV |         |    |

*Note 1: Other frequencies are available upon request, please contact VI for details*

*SS is code for non-standard frequencies, list the frequency after the part number.*

*Note 2: Not all combinations are possible.*

*Note 3: Output frequency must be equal to or greater than the input frequency. The ratio of  $f_o/f_{in}$  must be an integer. Also, the output frequency must be equal to greater than 100 kHz.*

## Ordering Information

# FX-500-E A E-K N N N-XX-XX

### Product Family

FX: Frequency Translator

### Package

500: 9.0 x 14 x 4.5 mm

### Input

D: 5.0 Vdc  $\pm$ 10%

E: 3.3 Vdc  $\pm$ 10%

### Output

A: CMOS

### Operating Temperature

E: -40 to 85 °C

T: 0 to 70 °C

### Absolute Pull Range

K:  $\pm$  50 ppm

P:  $\pm$  80 ppm

S:  $\pm$  100 ppm

**Output Frequency**  
(See Above)

**Input Frequency**  
(See Above)

### Performance Options

N: Standard

A: Improved Phase Noise

### Loop Filter BW

N: Internal Loop Filter

### Factory Use

N: Standard

Note: Not all combinations will be available - check with the factory to determine the optimum configuration for your application

## For Additional Information, Please Contact

### USA:

Vectron International  
267 Lowell Road  
Hudson, NH 03051  
Tel: 1.888.328.7661  
Fax: 1.888.329.8328

### Europe:

Vectron International  
Landstrasse, D-74924  
Neckarbischofsheim, Germany  
Tel: +49 (0) 3328.4784.17  
Fax: +49 (0) 3328.4784.30

### Asia:

Vectron International  
1F-2F, No 8 Workshop, No 308 Fenju Road  
WaiGaoQiao Free Trade Zone  
Pudong, Shanghai, China 200131  
Tel: 86.21.5048.0777  
Fax: 86.21.5048.1881

### Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.