

GVXO-44F

3.3V VCXO - High Frequency, DIL-14

Package

- Low cost for volume applications
- Choice of pullability & stability
- Industrial temperature range option
- 3.3V supply voltage
- DIL-14 package




CONFIGURABLE OPTIONS	
Parameter	Option Code
Frequency	
Frequency pullability	
Any	
±50ppm min	N
±100ppm min	S
±150ppm min	W
Frequency stability	
Any	
±100ppm max	А
±50ppm max	В
±25ppm max	С
±20ppm max	D
±15ppm max	E
Operating temperature range	
Any	
-10 to +70°C	
-40 to +85°C	I



SPECIFICATIONS

$\begin{array}{lll} \mbox{Frequency range} & 33.0 \sim 125\mbox{MHz} \\ \mbox{Dimensions} & 20.80 \times 13.08 \times 5.70\mbox{mm} \\ \mbox{Package} & 14 \mbox{pin DIL (full size)} \\ \mbox{Voltage control} & +1.65\mbox{V} \pm 1.65\mbox{V}, 10\% \mbox{linearity} \\ & > 100\mbox{k}\Omega \mbox{input impedance} \\ \mbox{Ageing} & \pm 5.0\mbox{ppm max per year} \\ \mbox{Storage temperature} & -55 \mbox{ to } +125\mbox{°C} \\ \mbox{range} & \\ \mbox{Supply voltage (V_{DD})} & +3.3\mbox{V} (\pm 5\%) \\ \mbox{Supply current} & 18\mbox{max} (33.0 \sim 45.0\mbox{MHz}) \\ \mbox{20mA max} (>45.0 \sim 80.0\mbox{MHz}) \\ \mbox{20mA max} (>45$		
Package 14 pin DIL (full size) Voltage control +1.65V ±1.65V, 10% linearity > 100kΩ input impedance Ageing ±5.0ppm max per year Storage temperature -55 to +125 °C range Supply voltage (V _{DD}) +3.3V (±5%) Supply current 18mA max (33.0 ~ 45.0MHz)	Frequency range	33.0 ~ 125MHz
Voltage control $+1.65V \pm 1.65V$, 10% linearity $> 100k\Omega$ input impedance Ageing ± 5.0 ppm max per year Storage temperature -55 to $+125$ °C range Supply voltage (V _{DD}) $+3.3V$ ($\pm 5\%$) Supply current 18 mA max ($33.0 \sim 45.0$ MHz)	Dimensions	20.80 x 13.08 x 5.70mm
$ > 100 k\Omega \text{ input impedance} $ $ + 5.0 \text{ppm max per year} $ $ + 55 \text{ to } + 125 ^{\circ}\text{C} $ $ + 125 $	Package	14 pin DIL (full size)
Storage temperature $-55 \text{ to } +125 ^{\circ}\text{C}$ range Supply voltage (V _{DD}) $+3.3 \text{V } (\pm 5\%)$ Supply current $18\text{mA max} (33.0 \sim 45.0 \text{MHz})$	Voltage control	·
range	Ageing	±5.0ppm max per year
Supply current 18mA max (33.0 ~ 45.0MHz)		-55 to +125°C
11 7	Supply voltage (V _{DD})	+3.3V (±5%)
25mA max (>80.0 ~ 125MHz)	Supply current	20mA max (>45.0 ~ 80.0MHz)
Driving ability 30pF CMOS 5 LSTTL	Driving ability	·
Logic levels '0' level = $+0.4V$ max '1' level = $90\%V_{DD}$ min	Logic levels	
Waveform symmetry @ 40:60 max 50%V _{DD}		40:60 max
Rise / fall time 5ns max (0.4V \sim 90%V _{DD} min)	Rise / fall time	5ns max (0.4V ~ 90%V _{DD} min)

PACKAGE DRAWING

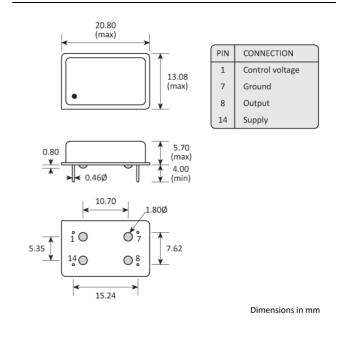

ORDERING INFORMATION

To request a quotation for the GVXO-44F please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 (0)1460 256 100 or at sales@golledge.com.

Once we've received your request our expert team will then produce a quotation tailored to meet your needs using the option codes you've selected.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)





CONSTRUCTION

Resistance weld

MATERIAL COMPOSITION



P6 Lead-free (< 0.1% by weight)



RoHS 2 compliant with no exemptions. See our

declaration



REACH compliant. See our statement



Au Ta Sn W Free of conflict minerals. See our declaration



Free of Halogens. See our declaration



Free of Ozone-depleting substances. See our

declaration



OTHER INFORMATION

About Golledge

We are the UK's leading supplier of frequency control products and are proud to serve the global electronics industry. Our philosophy is a focus firmly on your requirements by striving to meet and exceed your needs. We do this by ensuring the utmost quality and consistency in our products and services. If you have any queries about the Golledge service or any of our products please get in touch, we'd love to hear from you.

Come and visit

Give us a call

Email us

Eaglewood Park, ILMINSTER, Somerset, TA19 9DQ, England Tel: +44 1460 256 100 Fax: +44 1460 256 101 sales@golledge.com

Our Worldwide Distributors

Belgium & Luxembourg

Alcom Electronics NV/SA



Email Web Tel

info@alcom.be www.alcom.be +32 (0)3 458.30.33

China, Hong Kong - 中国 / 香港

Meiya China



Email Web

sales@meiyatech.com www.meiyatech.com +86 755 2823 1923

France

Equipments Scientifique



Email Web

comp@es-france.com www.es-france.com +33 1 47 95 99 89

Germany

MEV Elektronik Service GmbH



Web

info@mev-elektronik.com www.mev-elektronik.com +49 54 24 23 40-0

India

V5 Semiconductors



Email Web Tel

sales@v5semiconductors.com v5semiconductors.com +91-80-2661 0621

Israel

Phoenix Technologies Ltd



Email Web Tel

sales@phnx.co.il www.phnx.co.il +972 9 764 4800

Netherlands

Alcom Electronics BV



Email Web Tel

info@alcom.nl alcom.nl +31 (0)10 288.25.00

Norway

Link Nordic



bjorn.nyjordet@linknordic.com linknordic.com +47 93 22 68 90

Russia - Россия

EFO Ltd



Email Web Tel

elena@efo.ru www.golledge.ru +7(812)327-8654

Spain & Portugal

R.C. Microelectronica, S.A.



Email Web Tel

ventas@rcmicro.es www.rcmicro.es +34 93 260 21 66

Our customer feedback is testament to our quality; "Never had such good service as this from anyone in 35 years of being in the industry, this is impressive and has really helped us out of a corner to keep the design flowing" Andy (Senior Design Engineer), "As always your support is state of the art" Nicoleta (Material Management), "Legendary work - as usual it has to be said" John (Operations). To take advantage of our highly praised service get in touch with us today.