


# Metal Package PMT

## Photosensor Modules H5773/H5783/H6779/H6780 Series

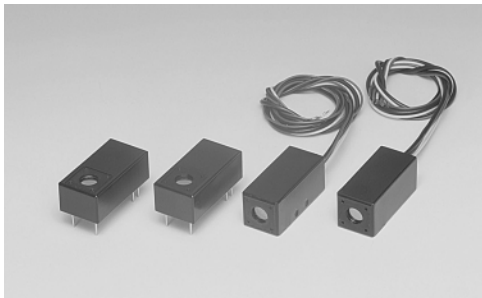

The H5773/H5783/H6779/H6780 series are photosensor modules housing a metal package PMT and high-voltage power supply circuit. The metal package PMTs have a metallic package with the same diameter as a TO-8 package used for semiconductor photodetectors, and deliver high gain, wide dynamic range and high-speed response while maintaining small dimensions identical to those of photodiodes. The internal high-voltage power supply circuit is also compact, making the module easy to use.

Considering the mounting methods, a cable output type and a pin output type are provided, and a total of 7 types are available according to the wavelength range to be measured. A P-type is also available with selected gain and dark count ideal for photon counting under extremely low light conditions.

### Product Variations

Suffix Type No.	None	-01	-02	-03	-04	-06	-20	Output Type	Features
	H5773	yes	yes	yes	yes	yes	yes		
H5783	yes	yes	yes	yes	yes	yes	yes	Cable output	
H5773P	yes	no	no	no	no	no	no	On-board	For photon counting
H5783P	yes	no	no	no	no	no	no	Cable output	Low power consumption
H6779	yes	yes	yes	yes	yes	yes	yes	On-board	Low ripple noise
H6780	yes	yes	yes	yes	yes	yes	yes	Cable output	Fast settling time

Suffix	Spectral Response
None	300 nm to 650 nm
-01	300 nm to 850 nm
-02	300 nm to 880 nm
-03	185 nm to 650 nm
-04	185 nm to 850 nm
-06	185 nm to 650 nm
-20	300 nm to 900 nm

The suffix -06 type (synthetic silica window) has higher sensitivity than the -03 type below 300 nm in wavelength range.

### Specifications

Parameter		H5773 / H5783 / H6779 / H6780 Series					Unit		
Suffix		None	-03, -06	-01, -04	-02	-20	—		
Input Voltage		+11.5 to +15.5					V		
Max. Input Voltage		+18					V		
Max. Input Current		H5773 / H5783 Series: 9 H6779 / H6780 Series: 30					mA		
Max. Output Signal Current		100					μA		
Max. Control Voltage		+1.0 (Input impedance 100 kΩ)					V		
Recommended Control Voltage Adjustment Range		+0.25 to +0.9					V		
Effective Area		φ8					mm		
Sensitivity Adjustment Range		1: 10 <sup>4</sup>					—		
Peak Sensitivity Wavelength		420	420	400	500	630	nm		
Cathode	Luminous Sensitivity	Min.	40	40	80	200	350	μA/lm	
		Typ.	70	70	150	250	500		
	Blue Sensitivity Index (CS 5-58)		8	8	—	—	—	—	
	Red/White Ratio		—	—	0.2	0.25	0.45	—	
Radiant Sensitivity *1		62	62	60	58	78	mA/W		
Anode	Standard Type	Luminous Sensitivity	Min.	10	10	15	25	35	A/lm
			Typ.	50	50	75	125	250	
		Radiant Sensitivity *1 *2		4.3 × 10 <sup>4</sup>	4.3 × 10 <sup>4</sup>	3.0 × 10 <sup>4</sup>	2.9 × 10 <sup>4</sup>	3.9 × 10 <sup>4</sup>	A/W
	P Type	Dark Current *2 *3	Typ.	0.2	0.2	0.4	2	2	nA
			Max.	2	2	4	20	20	
		Gain *2		Min.	7.5 × 10 <sup>5</sup>	—			—
Radiant Sensitivity *1 *2		6.2 × 10 <sup>4</sup>	—			—	A/W		
Dark Count *2 *3		Typ.	80	—			—	s <sup>-1</sup>	
Max.		400	—			—			
Rise Time *2		0.78					ns		
		<b>H5773 Series</b>	<b>H5783 Series</b>	<b>H6779 Series</b>	<b>H6780 Series</b>				
Ripple Noise *2 *4 (peak to peak) Max.		1.2		0.6		mV			
Settling Time *5		2		0.2		s			
Operating Ambient Temperature		+5 to +50		+5 to +45		°C			
Storage Temperature		-20 to +50					°C		
Weight		60	80	60	80	g			




\*1: Measured at the peak sensitivity wavelength \*2: Control voltage = +0.8 V \*3: After 30 minute storage in darkness

\*4: Cable RG-174/U, Cable length 450 mm, Load resistance = 1 MΩ, Load capacitance = 22 pF

\*5: The time required for the output to reach a stable level following a change in the control voltage from +1.0 V to +0.5 V.


# Current Output Type Photosensor Modules

## Characteristics (Cathode radiant sensitivity, Gain)

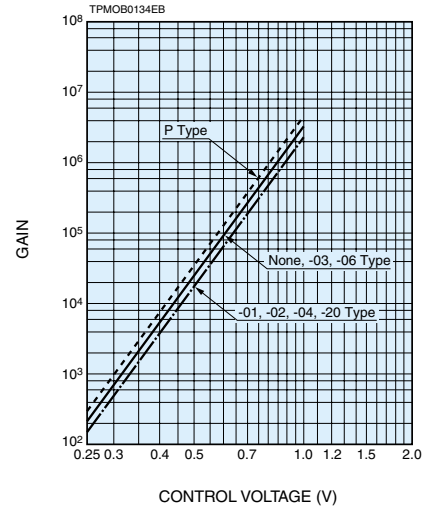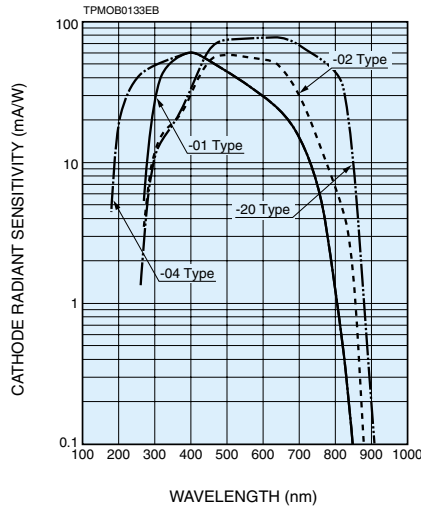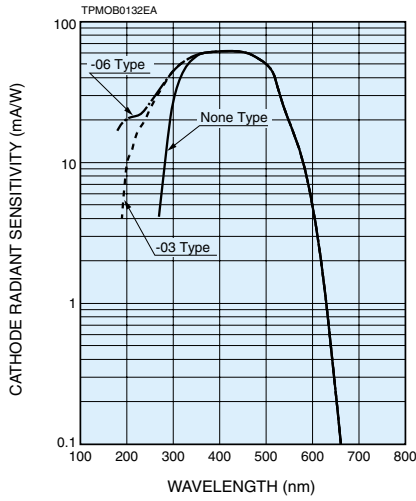


## Sensitivity Adjustment Method

### Voltage Programming

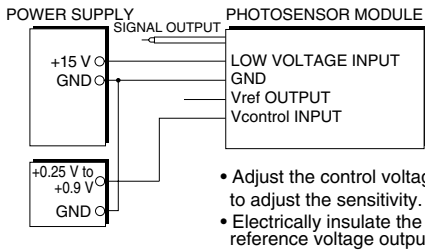

### Resistance Programming

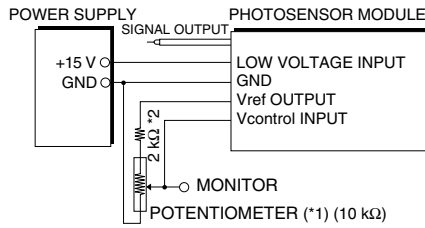


\*1: When using a potentiometer to adjust sensitivity, monitor the control voltage so it does not exceed +1.0 V.

\*2: H6779/H6780 series has this 2 kΩ resistor. No external resistor is needed.

TPMOC0131EC

## Dimensional Outlines (Unit: mm)


### H5773/H6779 Series

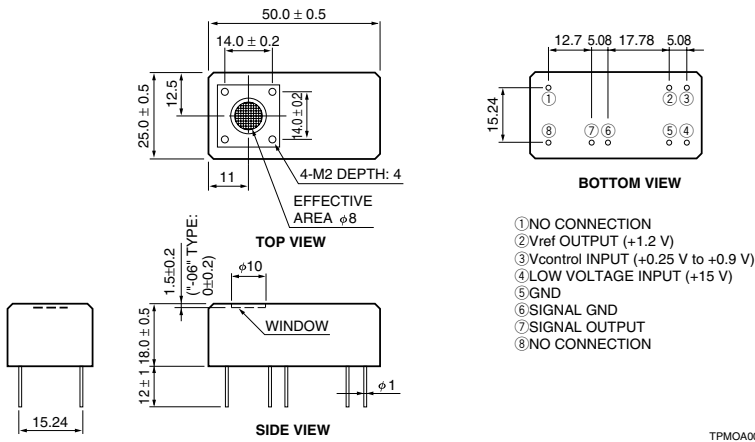

TPMOA0010EC


## Option (Optical Fiber Adaptor) (Unit: mm)

### E5776 (FC Type)

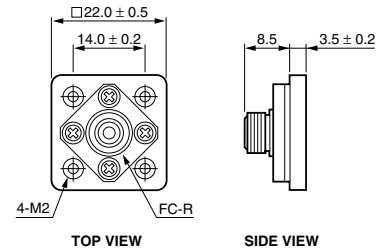


TACCA0055EA

### E5776-51 (SMA Type)

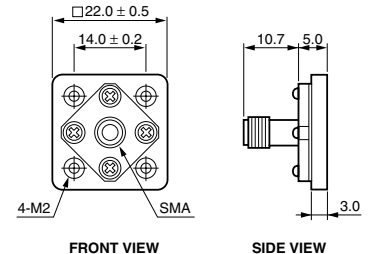

TACCA0239EA

### H5783/H6780 Series

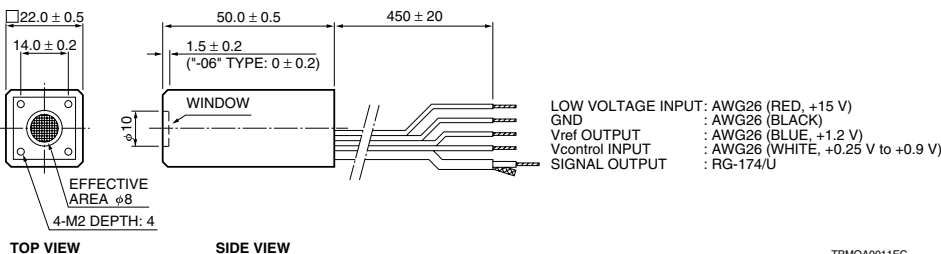

TPMOA0011EC