

FAST RECOVERY RECTIFIER

<p>FEATURES</p> <ul style="list-style-type: none"> • Low cost construction • Fast switching for high efficiency. • Low reverse leakage • High forward surge current capability • High temperature soldering guaranteed: 260°C/10 seconds/0.375" (9.5mm) lead length at 5 lbs (2,3kg) tension <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> • Case: Transfer molded plastic • Epoxy: UL94V-0 rate flame retardant • Polarity: Color band denotes cathode end • Lead: Plated axial lead ,solderable per MIL-STD-202E method 208C • Mounting position: Any • Weight: 0.012 ounce, 0.33 gram 	<p>VOLTAGE RANGE CURRENT</p> <p>200 to 1000 Volts 1.0 Ampere</p> <div style="text-align: right;">DO-41</div> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>
---	--

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%.

	SYMBOLS	1N4942	1N4944	1N4946	1N4947	1N4948	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0					Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30					Amps
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.3					Volts
Maximum DC Reverse Current at rated DC blocking voltage	$T_A=25^\circ\text{C}$	5.0					μAmps
	$T_A=100^\circ\text{C}$	200					
Maximum Reverse Recovery Time(NOTE3) $T_j=25^\circ\text{C}$	t_{rr}	150	250		500		nS
Typical Junction Capacitance(NOTE1)	C_J	15					pF
Typical Thermal Resistance(NOTE2)	$R_{\theta JA}$	50					$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150					$^\circ\text{C}$

NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C. board mounted.
3. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$.

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

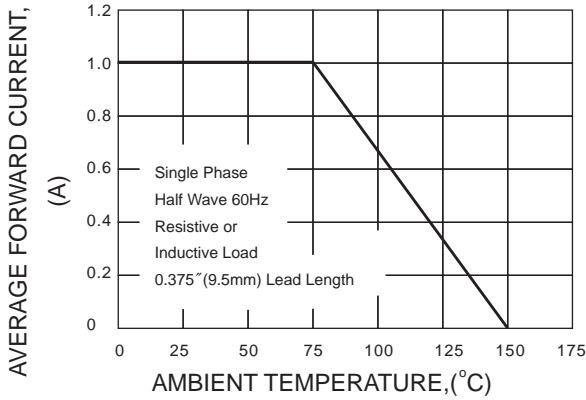


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

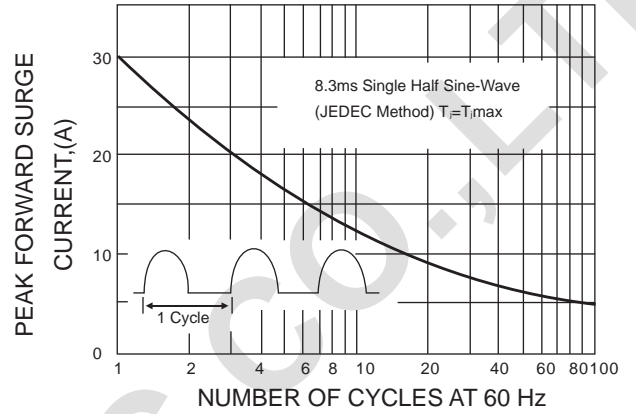


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

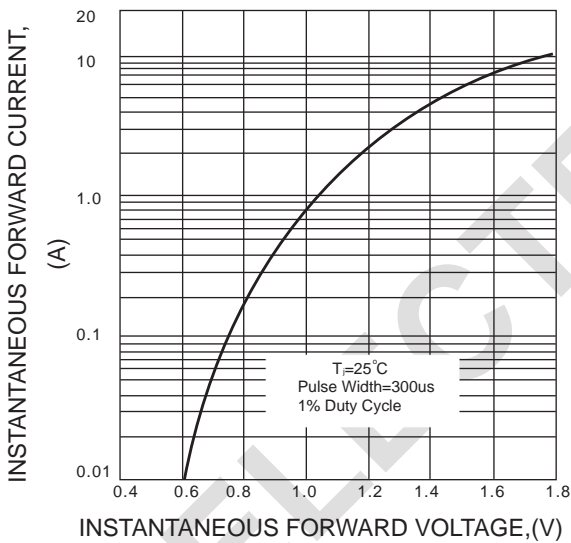


FIG.4-TYPICAL REVERSE CHARACTERISTICS

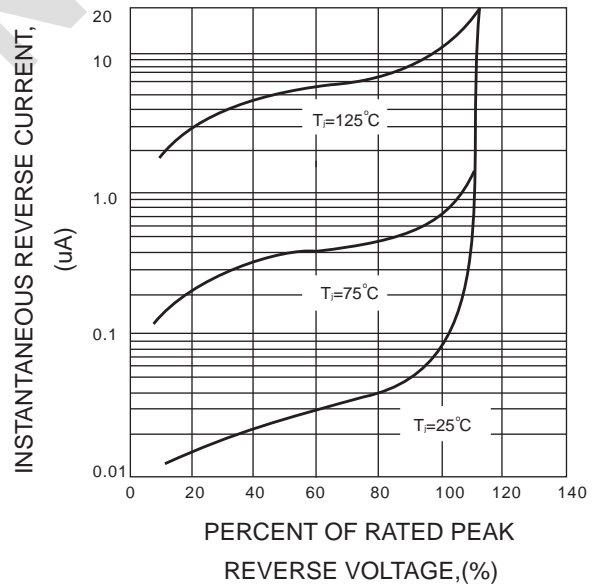


FIG.5-TYPICAL JUNCTION CAPACITANCE

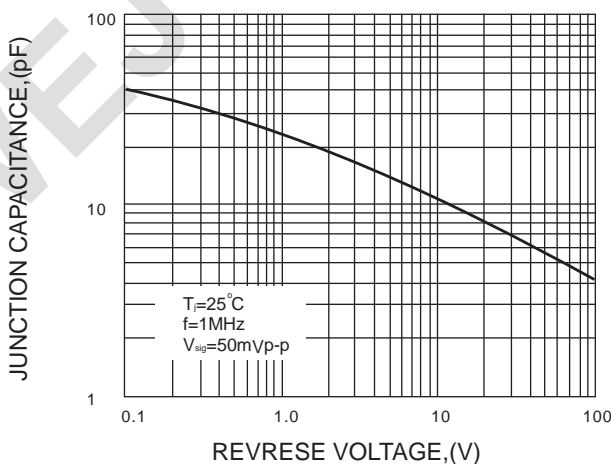


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

