

HEXFET® Power MOSFET for DC-DC Converters


- N-Channel Application-Specific MOSFETs
- Ideal for CPU Core DC-DC Converters
- Low Conduction Losses
- Low Switching Losses

Description

This new device employs advanced HEXFET Power MOSFET technology to achieve an unprecedented balance of on-resistance and gate charge. The reduced conduction and switching losses make it ideal for high efficiency DC-DC converters that power the latest generation of microprocessors.

The IRF7822 has been optimized for all parameters that are critical in synchronous buck converters including $R_{DS(on)}$, gate charge and Cdv/dt -induced turn-on immunity. The IRF7822 offers particularly low $R_{DS(on)}$ and high Cdv/dt immunity for synchronous FET applications.

The package is designed for vapor phase, infra-red, convection, or wave soldering techniques. Power dissipation of greater than 3W is possible in a typical PCB mount application.

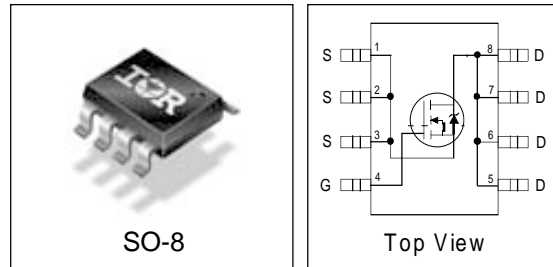

DEVICE CHARACTERISTICS^⑤

| IRF7822 | |
|--------------|-------|
| $R_{DS(on)}$ | 5.0mΩ |
| Q_G | 44nC |
| Q_{sw} | 12nC |
| Q_{oss} | 27nC |

Absolute Maximum Ratings

| Parameter | Symbol | IRF7822 | Units |
|---|--------------------|------------|-------|
| Drain-Source Voltage | V_{DS} | 30 | V |
| Gate-Source Voltage | V_{GS} | ±12 | |
| Continuous Drain or Source Current ($V_{GS} \geq 4.5V$) | $T_A = 25^\circ C$ | 18 | A |
| | $T_A = 70^\circ C$ | 13 | |
| Pulsed Drain Current ^① | I_{DM} | 150 | |
| Power Dissipation | $T_A = 25^\circ C$ | 3.1 | W |
| | $T_A = 70^\circ C$ | 3.0 | |
| Junction & Storage Temperature Range | T_J, T_{STG} | -55 to 150 | °C |
| Continuous Source Current (Body Diode) | I_S | 3.8 | A |
| Pulsed Source Current ^① | I_{SM} | 150 | |

Thermal Resistance

| Parameter | | Max. | Units |
|--|-----------------|------|-------|
| Maximum Junction-to-Ambient ^③ | $R_{\theta JA}$ | 40 | °C/W |
| Maximum Junction-to-Lead | $R_{\theta JL}$ | 20 | °C/W |

Electrical Characteristics

| Parameter | | Min | Typ | Max | Units | Conditions |
|-----------------------------------|--------------|-----|------|-----------|------------|--|
| Drain-to-Source Breakdown Voltage | BV_{DSS} | 30 | - | - | V | $V_{GS} = 0V, I_D = 250\mu A$ |
| Static Drain-Source on Resistance | $R_{DS(on)}$ | | 5.0 | 6.5 | m Ω | $V_{GS} = 4.5V, I_D = 15A$ ② |
| Gate Threshold Voltage | $V_{GS(th)}$ | 1.0 | | | V | $V_{DS} = V_{GS}, I_D = 250\mu A$ |
| Drain-Source Leakage Current | I_{DSS} | | | 30 | μA | $V_{DS} = 24V, V_{GS} = 0$ |
| | | | | 150 | | $V_{DS} = 24V, V_{GS} = 0,$ $T_j = 100^\circ C$ |
| Gate-Source Leakage Current | I_{GSS} | | | ± 100 | nA | $V_{GS} = \pm 12V$ |
| Total Gate Chg Cont FET | Q_G | | 44 | 60 | nC | $V_{GS}=5.0V, I_D=15A, V_{DS}=16V$ |
| Total Gate Chg Sync FET | Q_G | | 38 | | | $V_{GS} = 5.0V, V_{DS} < 100mV$ |
| Pre-Vth Gate-Source Charge | Q_{GS1} | | 13 | | | $V_{DS} = 16V, I_D = 15A$ |
| Post-Vth Gate-Source Charge | Q_{GS2} | | 3.0 | | | |
| Gate to Drain Charge | Q_{GD} | | 9.0 | | | |
| Switch Chg($Q_{GS2} + Q_{gd}$) | Q_{sw} | | 12 | | | |
| Output Charge | Q_{OSS} | | 27 | | | $V_{DS} = 16V, V_{GS} = 0$ |
| Gate Resistance | R_G | | 1.5 | | Ω | |
| Turn-on Delay Time | $t_{d(on)}$ | | 15 | | ns | $V_{DD} = 16V, I_D = 15A$ $V_{GS} = 5.0V$ Clamped Inductive Load |
| Rise Time | t_r | | 5.5 | | | |
| Turn-off Delay Time | $t_{d(off)}$ | | 22 | | | |
| Fall Time | t_f | | 12 | | | |
| Input Capacitance | C_{iss} | - | 5500 | - | pF | $V_{DS} = 16V, V_{GS} = 0$ |
| Output Capacitance | C_{oss} | - | 1000 | - | | |
| Reverse Transfer Capacitance | C_{rss} | - | 300 | - | | |

Source-Drain Rating & Characteristics

| Parameter | | Min | Typ | Max | Units | Conditions |
|---|-------------|-----|-----|-----|-------|--|
| Diode Forward Voltage* | V_{SD} | | | 1.0 | V | $I_S = 15A$ ②, $V_{GS} = 0V$ |
| Reverse Recovery Charge④ | Q_{rr} | | 120 | | nC | $di/dt \sim 700A/\mu s$ $V_{DS} = 16V, V_{GS} = 0V, I_S = 15A$ |
| Reverse Recovery Charge (with Parallel Schottky)④ | $Q_{rr(s)}$ | | 108 | | nC | $di/dt = 700A/\mu s$ (with 10BQ040) $V_{DS} = 16V, V_{GS} = 0V, I_S = 15A$ |

- Notes:**
- ① Repetitive rating; pulse width limited by max. junction temperature.
 - ② Pulse width $\leq 400 \mu s$; duty cycle $\leq 2\%$.
 - ③ When mounted on 1 inch square copper board
 - ④ Typ = measured - Q_{oss}
 - ⑤ Typical values of $R_{DS(on)}$ measured at $V_{GS} = 4.5V, Q_G, Q_{sw}$ and Q_{OSS} measured at $V_{GS} = 5.0V, I_F = 15A$.

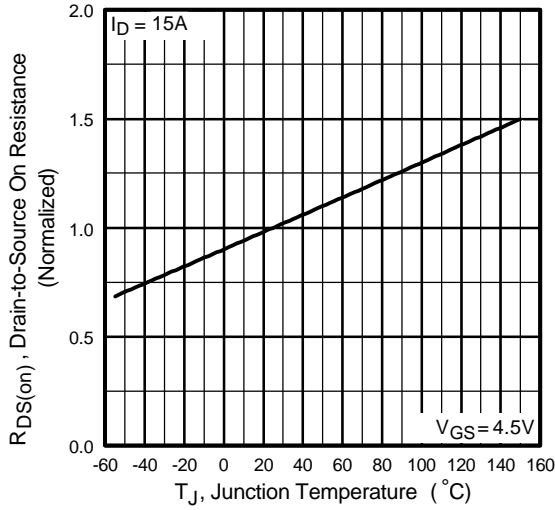


Fig 1. Normalized On-Resistance Vs. Temperature

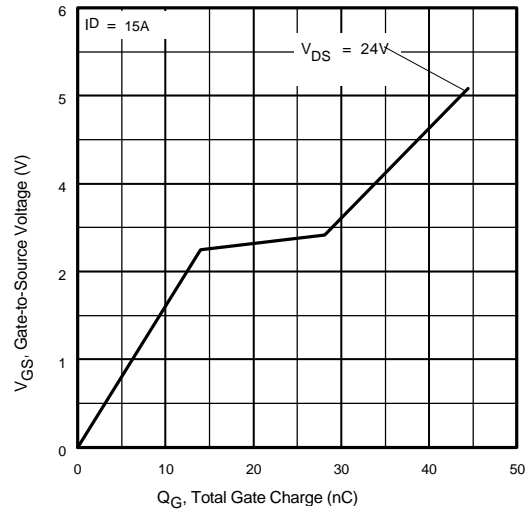


Fig 2. Typical Gate Charge Vs. Gate-to-Source Voltage

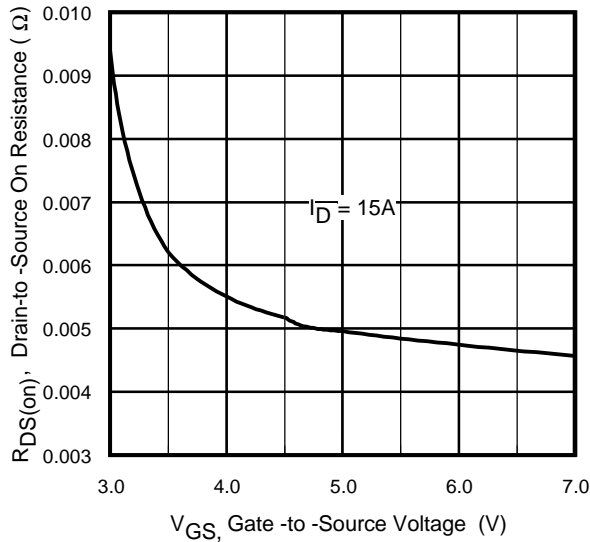


Fig 3. On-Resistance Vs. Gate Voltage





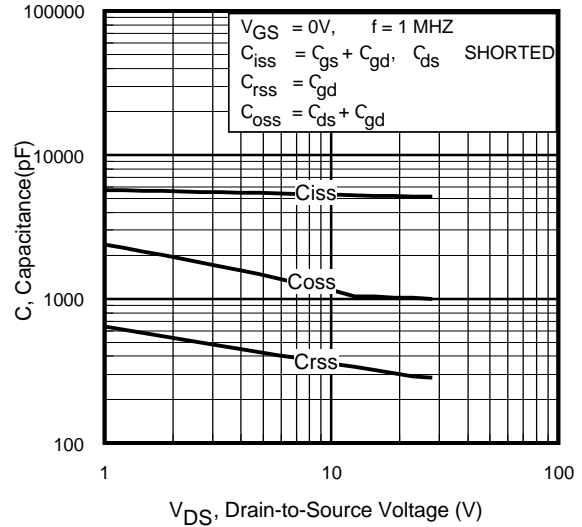


Fig 4. Typical Capacitance Vs. Drain-to-Source Voltage

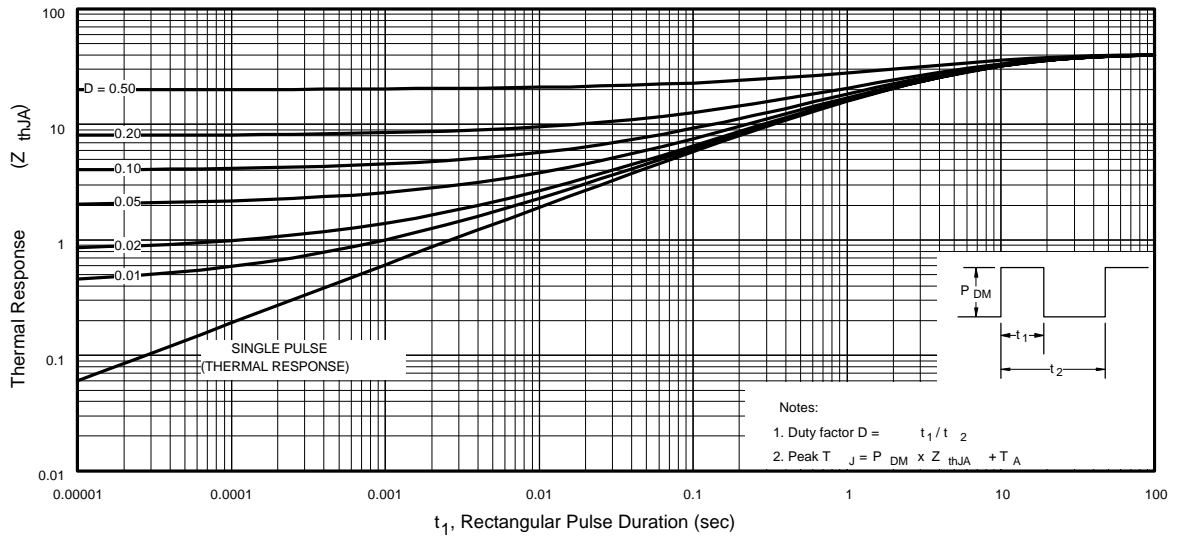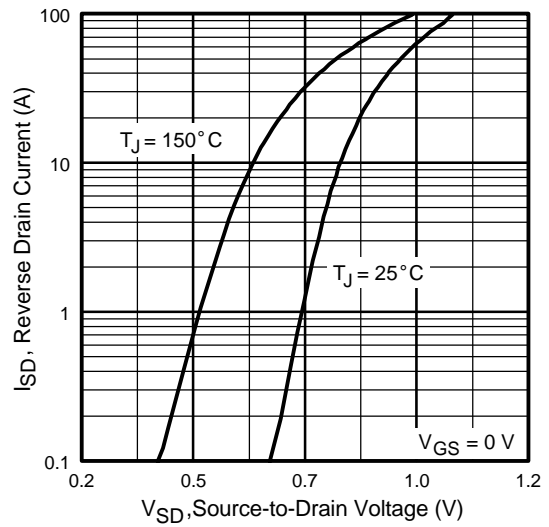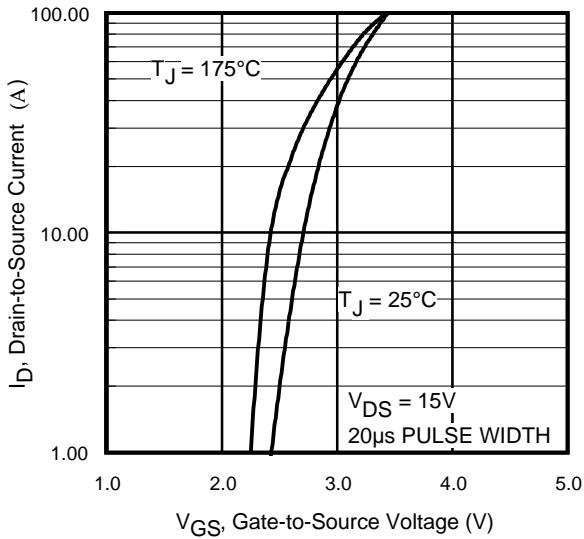


SO-8 Package Details

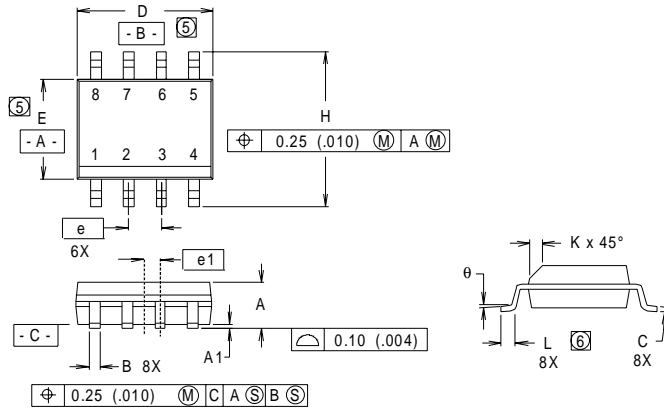

| DIM | INCHES | | MILLIMETERS | |
|-----|------------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | .0532 | .0688 | 1.35 | 1.75 |
| A1 | .0040 | .0098 | 0.10 | 0.25 |
| B | .014 | .018 | 0.36 | 0.46 |
| C | .0075 | .0098 | 0.19 | 0.25 |
| D | .189 | .196 | 4.80 | 4.98 |
| E | .150 | .157 | 3.81 | 3.99 |
| e | .050 BASIC | | 1.27 BASIC | |
| e1 | .025 BASIC | | 0.635 BASIC | |
| H | .2284 | .2440 | 5.80 | 6.20 |
| K | .011 | .019 | 0.28 | 0.48 |
| L | 0.16 | .050 | 0.41 | 1.27 |
| θ | 0° | 8° | 0° | 8° |

RECOMMENDED FOOTPRINT




NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION : INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
- ⑤ DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS
MOLD PROTRUSIONS NOT TO EXCEED 0.25 (.006).
- ⑥ DIMENSIONS IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE..

SO-8 Part Marking


EXAMPLE: THIS IS AN IRF7101

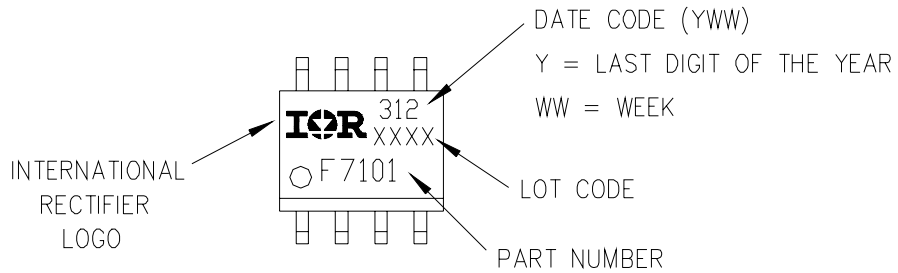


IRF7822

International
IR Rectifier

SO-8 Tape and Reel

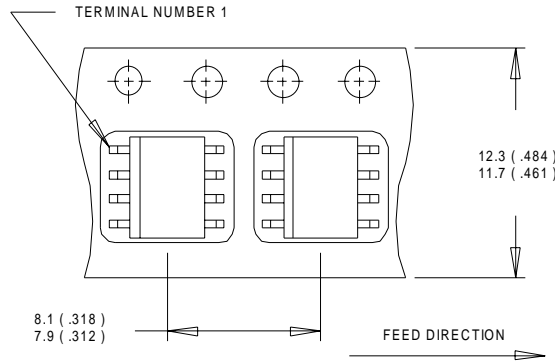

- NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
 2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
 3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

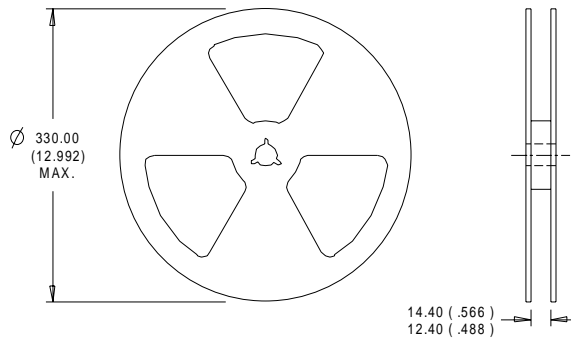

- NOTES :
1. CONTROLLING DIMENSION : MILLIMETER.
 2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.
This product has been designed and qualified for the Consumer market.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.07/01
www.irf.com