

■ Features

- Low power loss, high efficiency.
- High current capability, low forward voltage drop.
- High surge capability.
- Guardring for overvoltage protection.
- Ultra high-speed switching.
- Silicon epitaxial planar chip, metal silicon junction.
- Suffix "H" indicates Halogen-free part, ex.MBR2040FCTH. Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Mechanical data

- Epoxy : UL94-V0 rated flame retardant.
- Case : JEDEC ITO-220AB molded plastic body over passivated chip.
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed.
- Polarity: Color band denotes cathode end.
- Mounting Position : Any.
- Weight : Approximated 2.25 gram.

■ Maximum ratings and electrical characteristics


Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.1	I_o			20	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}			150	A
Reverse current	$V_R = V_{RRM} T_A = 25^\circ C$	I_R			0.1	mA
	$V_R = V_{RRM} T_A = 125^\circ C$				10	
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C_J		150		pF
Thermal resistance	Junction to ambient	$R_{\theta JA}$		30		°C/W
Storage temperature		T_{STG}	-55		+175	°C

Symbol	Marking code	Max. repetitive peak reverse voltage V_{RRM} (V)	Max. RMS voltage V_{RMS} (V)	Max. DC blocking voltage V_R (V)	Max. forward voltage @10A, $T_A = 25^\circ C$ V_F (V)	Max. forward voltage @10A, $T_A = 125^\circ C$ V_F (V)	Operating temperature T_J (°C)
MBR2040FCT	MBR2040CT	40	28	40	0.70	0.57	-55 ~ +150
MBR2045FCT	MBR2045CT	45	31.5	45			
MBR2060FCT	MBR2060CT	60	42	60			
MBR2065FCT	MBR2065CT	65	45.5	65			
MBR20100FCT	MBR20100CT	100	70	100			
MBR20150FCT	MBR20150CT	150	105	150			
MBR20200FCT	MBR20200CT	200	140	200			

■ Outline

ITO-220AB

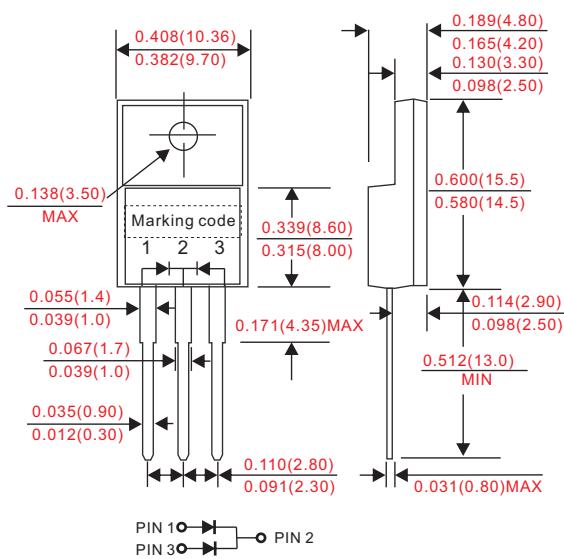

Dimensions in inches and (millimeters)

■ Rating and characteristic curves

Fig.1 - Forward Current Derating Curve

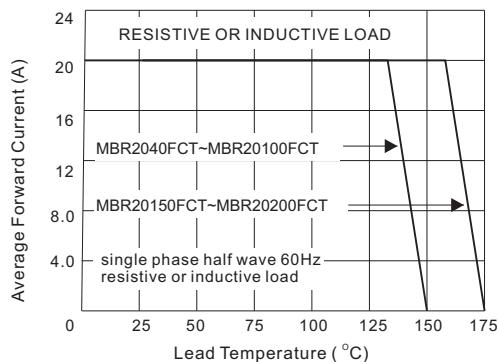


Fig. 3.1 - Instantaneous Forward Characteristics

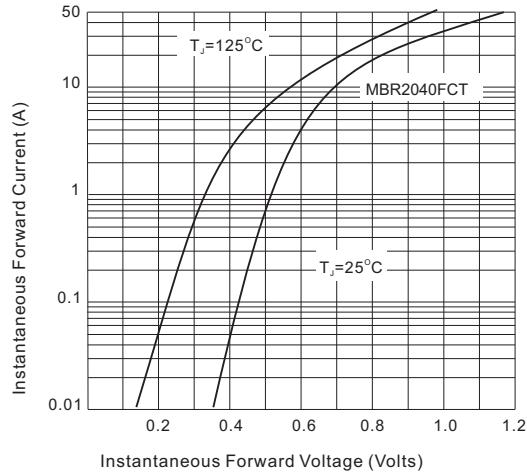


Fig. 3.3 - Instantaneous Forward Characteristics

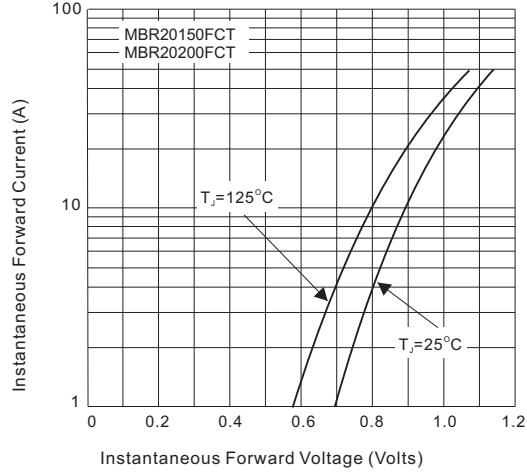


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

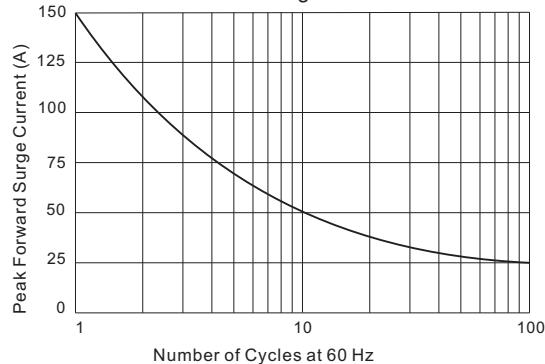


Fig. 3.2 - Instantaneous Forward Characteristics

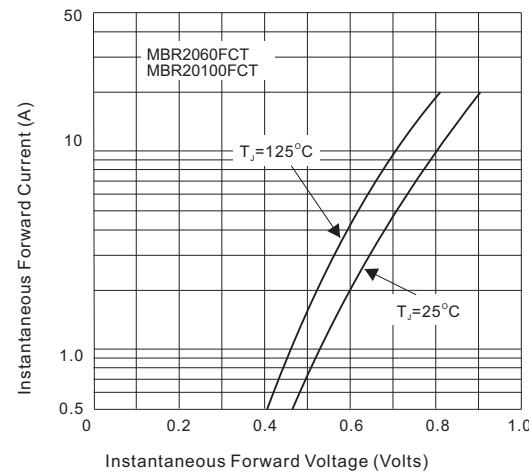


Fig. 4 - Reverse Characteristics

