

MSFB27-183-022K8


AMPS-IF

■Features

- IF filter for AMPS.
- Because it is leadless type, automatic mounting is possible.
- Excellent group delay distortion characteristics.

■Standard Frequencies


- 183.6MHz.

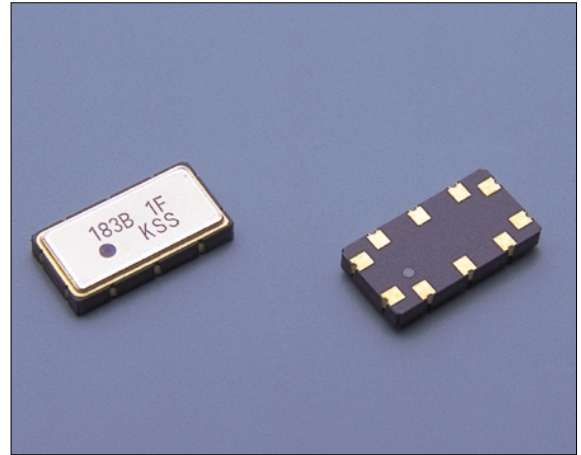

■Specifications

Item	Unit	Conditions	Specifications
Nominal Frequency	MHz	—	183.6
Operating Temperature Range	°C	-25~+75	—
Storage Temperature Range	°C	-35~+85	—
Pass Bandwidth	kHz	-3dB	Fo±11 MIN.
Ripple	dB	Fo±11kHz	1.5 MAX.
Insertion Loss	dB	Minimum Loss	5.5 MAX.
		Fo±60kHz	11 MIN.
Guaranteed Attenuation	dB	Fo±120kHz	40 MIN.
		Fo±11kHz	15 MAX.
Terminating Impedance	Ω/pF	—	410/-0.4

■Outline

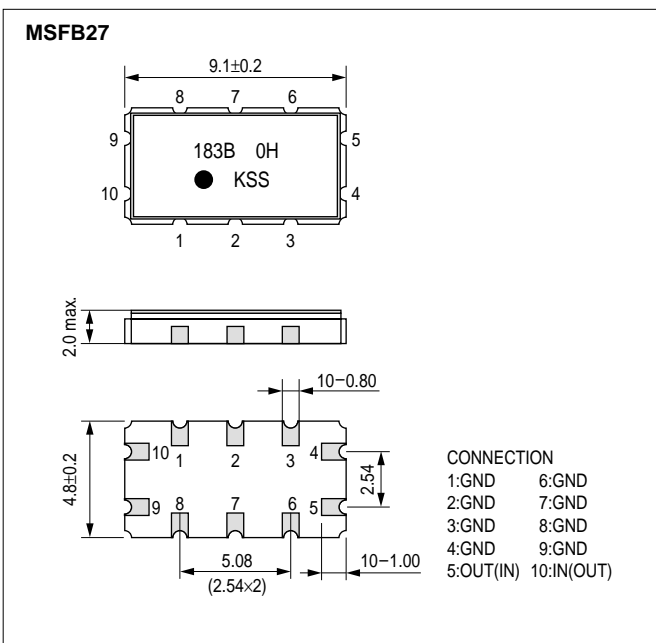

■Measurement Circuit

