

DOLBY B·C TYPE NOISE REDUCTION PROCESSOR


■ GENERAL DESCRIPTION

The NJM2065A is a low-voltage operating DOLBY B·C-type noise reduction processor IC. The NJM2065A is suitable to the head-phone stereo and small cassette tape recorder.

■ FEATURES

- Low Operating Voltage (1.8V~6.0V)
- Minimum External Components
- Good temperature characteristics (4mA)
- Internal Switch of NR ON/OFF ENCODE/DECODE
- Dolby Level Encode Output Level 100mVrms
Decode Output Level 100mVrms
- Package Outline DIP20, DMP20
- Bipolar Technology

■ PACKAGE OUTLINE

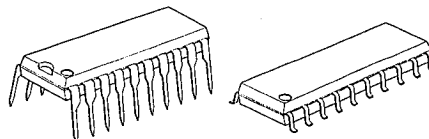

NJM2065AD

NJM2065AM

(note) Dolby and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation, San Francisco, CA94103-4813, USA.

This device available only to licensees of Dolby Lab. Licensing and application information may be obtained from Dolby Lab.

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V*	6.5	V
Power Dissipation	P _D	(DIP16) 700 (DMP16) 350	mW mW
Operating Temperature Range	T _{opr}	-20~+75	°C
Storage Temperature Range	T _{slg}	-40~+125	°C

■ ELECTRICAL CHARACTERISTICS

(V*=3.0V. (note 1). Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION				MIN.	TYP.	MAX.	UNIT
		R/P	NR	f(Hz)	OTHTER CONDITIONS				
Operating Voltage	V _{opc}					1.8	6		V
Operating Current	I _{cc}	R	OFF		No signal	1.5	3	5	mA
Voltage Gain (REC)	G _{VR}	R	OFF	1k		9	10	11	dB
(MON)	G _{VM}	R	OFF	1k		9	10	11	dB
Encode Characteristics									
B Type (1)	B-1	R	B	5k	0dB	-1.2	0.3	1.8	dB
B Type (2)	B-2	R	B	1.4k	-15dB	0.8	2.3	3.8	dB
B Type (3)	B-3	R	B	1k	-25dB	4.2	5.7	7.2	dB
B Type (4)	B-4	R	B	5k	-30dB	6.7	8.2	9.7	dB
B Type (5)	B-5	R	B	5k	-40dB	9.8	10.3	11.8	dB
C Type (1)	C-1	R	C	5k	0dB	-4.3	-2.3	-0.3	dB
C Type (2)	C-2	R	C	1k	-20dB	3.9	5.9	7.9	dB
C Type (3)	C-3	R	C	500	-30dB	9.8	11.8	13.8	dB
C Type (4)	C-4	R	C	700	-40dB	14.5	16.5	18.5	dB
C Type (5)	C-5	R	C	5k	-60dB	19.4	20.4	22.4	dB
Decode Characteristics									
B Type	B _d	P	B	5k	-30dB		-8.2		dB
C Type	C _d	P	C	1k	-40dB		-16.5		dB
Signal Handling	SH	P	C	1k	THD=1%, V*=1.8V	12	13		dB
S/N Ratio(PIN9)									
C Type	SN _c	R	C		} R _g =5.6kΩ CCIR/ARM	60	62		dB
B Type	SN _B	R	B			71			dB
NR OFF	SN _o	R	OFF			78			dB
Total Harmonic Distortion									
NR OFF (REC)	THD1	R	OFF	1k	0dB		0.03	0.2	%
NR OFF (MON)	THD2	P	OFF	1k	0dB		0.03		%
B Type (REC)	THD3	R	B	1k	0dB		0.05		%
B Type (MON)	THD4	P	B	1k	0dB		0.05		%
C Type (REC)	THD5	R	C	1k	0dB		0.09	0.4	%
C Type (MON)	THD6	P	C	1k	0dB		0.08		%
Control Voltage									
REC	V _{erR}	} Voltage between both terminals of				0		0.2	V
PLAY	V _{erP}	} 10kΩ register connected to pin 20				1.6		V ⁺	V
NR OFF	V _{erO}	} Voltage between both terminals of					open		V
B Type	V _{erB}	} 8.2kΩ register connected to pin 1				1.6		V ⁺	V
C Type	V _{erC}					0		0.2	V

(note 1): Definition of 0dB DOLBY LEVEL.

Encode Mode: On NR-OFF condition. put 400 Hz input signal to PIN19, and adjust the voltage of PIN15 to 31.6mV. At this condition the voltage of PIN9 is about 100mV which is 0dB.

Decode Mode: On NR-OFF condition. put 400Hz input signal, to PIN19, and adjust the voltage of PIN15 to 31.6mV. At this condition the voltage of PIN10 is about 100mV which is 0dB.

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.