


Features

- Stabilizes Power Supply Feedback Loop
- Reduces Power Supply Signal Gain
- Effective For Signals: 1 MHz to 1 GHz
- Low Energy Storage(Important For Safety Applications)
- Restores Output Signal Wave Forms Of High Speed Digital And Linear Systems.
- Eliminates The Need For Series Ferrite Beads For Power Supply Filtering(Application Dependent)

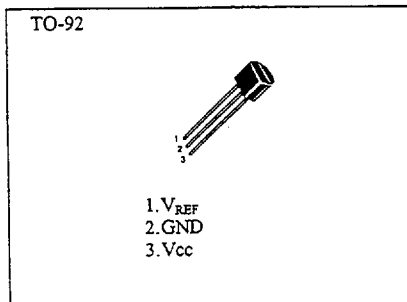

The P101 Power Supply Damping Circuit(PSDC) suppresses high frequency noise on the DC power supply lines as well as reducing EMI radiated from the applications themselves. To achieve this the P101 provides a low impedance path from V_{CC} to GND for signals above 1MHz. The PSDC functions as an AC coupled shunt regulator.

This device is designed to stabilize power supply resonance circuits in applications such as:

- Logic circuits
- Radio/TV frequency systems
- High performance ADC and DAC
- Mixed signal applications

By connecting the V_{REF} input through a series resistor to V_{CC} the PSDC impedance can be lowered further(Note:By exceeding the maximal allowable current consumption of 30mA the device may be damaged).When the V_{REF} input is connected to GND the PSDC will become inactive which is useful in high frequency test applications.

Due to the AC coupling of the PSDC this device can be paralleled to improve the performance of a system.

Absolute Maximum Ratings

Characteristics	Symbol	Rating	Units
Power Supply Voltage	V_{CC}	8	V
Max Current Consumption	I_{CC}	30	mA
Max Reference Input Current	I_{REF}	4	mA
Operating Ambient Temperature Range	T_A	-20...+125	$^{\circ}C$
Storage Temperature Range	T_S	-55...+150	$^{\circ}C$

DC Electrical Characteristics at $T_A=+25^\circ\text{C}$ (unless otherwise noted)

Characteristics	Symbol	Test Conditions	Limits			Units
			Min	Typ	Max	
Supply Voltage	V_{CC}		4.5		5.5	V
Supply Current	I_{CC}	$V_{CC}=5\text{V}$ $V_{REF}=\text{OPEN}$	0.72	1.2	1.68	mA
		$V_{CC}=5\text{V}$ $V_{REF}=2.2\text{K}\Omega$ to V_{CC}	6.2	10.4	14.5	mA
Reference Input Voltage	V_{REF}	$V_{REF}=\text{Open Circuit}$	1.3		1.9	V

AC Electrical Characteristics at $T_A=+25^\circ\text{C}$ (unless otherwise noted)

Characteristics	Symbol	Test Conditions	Limits			Units
			Min	Typ	Max	
Supply Impedance	$Z_{V_{CC}, V_{GND}}$	$V_{REF}=\text{Open}$ $f < 1\text{KHz}$	5K			Ohm
		$V_{REF}=\text{Open}$ $f < 10\text{KHz}$	5K			Ohm
		$V_{REF}=\text{Open}$ $f = 1\text{MHz}$			80	Ohm
		$V_{REF}=\text{Open}$ $f = 10\text{MHz}$			40	Ohm
		$V_{REF}=\text{Open}$ $f = 100\text{MHz}$			45	Ohm

FCI Semiconductor, reserves the right to make from, time to time, such amendments to the detail specifications as may be required to permit improvements in the design of its products.

The information included herein is believed to be accurate and reliable. However, FCI Semiconductor, assumes no responsibility for its use, nor for any infringements of patents or other rights of third parties are not intended for use in life support application, devices, or systems. Use of a FCI Semiconductor product in such applications without the written consent of FCI Semiconductor is prohibited.

PSDC Impedance versus Frequency

