

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**POW-R-BLOK™**  
**Dual SCR Isolated Module**  
**700 Amperes / Up to 1800 Volts**




**Description:**

Powerex Dual SCR Modules are designed for use in applications requiring phase control and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink.

**Features:**

- Electrically Isolated Heatsinking
- Compression Bonded Elements
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability

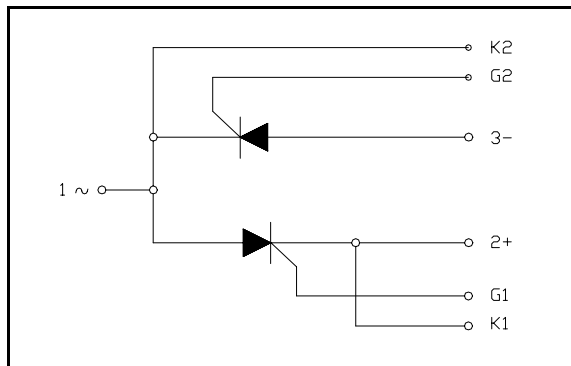

**Benefits:**

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

**Applications:**

- Bridge Circuits
- AC & DC Motor Drives
- Motor Soft Starters
- Battery Supplies
- Power Supplies
- Large IGBT Circuit Front Ends

**Ordering Information:**

Select the complete eight-digit module part number from the table below.

Example: PD431807 is a 1800 Volt, 700A Average Dual SCR Isolated POW-R-BLOK™ Module

| Type | Voltage Volts (x100) | Current Amperes (x100) |
|------|----------------------|------------------------|
| PD43 | 12                   | 07                     |
|      | 14                   |                        |
|      | 16                   |                        |
|      | 18                   |                        |

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**POW-R-BLOK™**  
**Dual SCR Isolated Module**  
**700 Amperes / Up to 1800 Volts**

**Absolute Maximum Ratings**

| Characteristics  | Conditions  | Symbol                | Units                                 |
|--|---|-----------------------|---------------------------------------|
| Repetitive Peak Forward and Reverse Blocking Voltage                     |   | $V_{DRM}$ & $V_{RRM}$ | Up to 1800 V                          |
| Non-Repetitive Peak Blocking Voltage ( $t < 5$ msec)                     |   | $V_{RSM}$             | $V_{RRM} + 100V$ V                    |
| RMS Current AC Switch Configuration (180° Conduction)                    | 180° Conduction, $T_C=74^\circ C$                   | $I_{T(RMS)}$          | 1775 A                                |
|  | 180° Conduction, $T_C=78^\circ C$                   | $I_{T(RMS)}$          | 1665 A                                |
|  | <b>180° Conduction, <math>T_C=82^\circ C</math></b> | $I_{T(RMS)}$          | <b>1550</b> A                         |
|  | 180° Conduction, $T_C=86^\circ C$                   | $I_{T(RMS)}$          | 1440 A                                |
| RMS Current Per SCR (180° Conduction)                                    | 180° Conduction, $T_C=74^\circ C$                   | $I_{T(RMS)}$          | 1256 A                                |
|  | 180° Conduction, $T_C=78^\circ C$                   | $I_{T(RMS)}$          | 1178 A                                |
|  | <b>180° Conduction, <math>T_C=82^\circ C</math></b> | $I_{T(RMS)}$          | <b>1100</b> A                         |
|  | 180° Conduction, $T_C=86^\circ C$                   | $I_{T(RMS)}$          | 1020 A                                |
| Average Forward Current Per SCR (180° Conduction)                        | 180° Conduction, $T_C=74^\circ C$                   | $I_{T(AV)}$           | 800 A                                 |
|  | 180° Conduction, $T_C=78^\circ C$                   | $I_{T(AV)}$           | 750 A                                 |
|  | <b>180° Conduction, <math>T_C=82^\circ C</math></b> | $I_{T(AV)}$           | <b>700</b> A                          |
|  | 180° Conduction, $T_C=86^\circ C$                   | $I_{T(AV)}$           | 650 A                                 |
| Peak One Cycle Surge Current, Non-Repetitive $T_j = 25C, V_r = 0$        | 60 Hz   | $I_{TSM}$             | 69,000 A                              |
|  | 50 Hz   | $I_{TSM}$             | 63,000 A                              |
| Peak One Cycle Surge Current, Non-Repetitive $T_j = 25C, V_r = V_{rrm}$  | 60 Hz   | $I_{TSM}$             | 46,000 A                              |
|  | 50 Hz   | $I_{TSM}$             | 42,000 A                              |
| Peak One Cycle Surge Current, Non-Repetitive $T_j = 125C, V_r = 0$       | 60 Hz   | $I_{TSM}$             | 60,000 A                              |
|  | 50 Hz   | $I_{TSM}$             | 54,750 A                              |
| Peak One Cycle Surge Current, Non-Repetitive $T_j = 125C, V_r = V_{rrm}$ | 60 Hz   | $I_{TSM}$             | 40,000 A                              |
|  | 50 Hz   | $I_{TSM}$             | 36,500 A                              |
| Peak Three Cycle Surge Current, Non-Repetitive                           | 60 Hz, $T_j = 125C, V_r = V_{rrm}$                  | $I_{TSM}$             | 32,100 A                              |
| Peak Ten Cycle Surge Current, Non-Repetitive                             | 60 Hz, $T_j = 125C, V_r = V_{rrm}$                  | $I_{TSM}$             | 25,200 A                              |
| $I^2t$ for Fusing for One Cycle $T_j = 125C, V_r = V_{rrm}$              | 8.3 milliseconds                                    | $I^2t$                | $6.60 \times 10^6$ A <sup>2</sup> sec |
|  | 10 milliseconds                                     | $I^2t$                | $6.66 \times 10^6$ A <sup>2</sup> sec |
| Maximum Rate-of-Rise of On-State Current, (Non-Repetitive)               | Per JEDEC Standard 397 5.2.2.6                      | di/dt                 | 400 A/ $\mu$ s                        |
| Maximum Rate-of-Rise of On-State Current, (Repetitive)                   | Per JEDEC Standard 397 5.2.2.6                      | di/dt                 | 150 A/ $\mu$ s                        |
| Operating Temperature  |   | $T_J$                 | -40 to +125 °C                        |
| Storage Temperature  |   | $T_{sig}$             | -40 to +150 °C                        |
| Max. Mounting Torque, M6 Mounting Screw                                  |   |                       | 132 in. – Lb.                         |
|  |   |                       | 15 Nm                                 |
| Max. Mounting Torque, M10 Terminal Screw                                 |   |                       | 106 in. – Lb.                         |
|  |   |                       | 12 Nm                                 |
| Module Weight, Typical   |   |                       | 455 g                                 |
|  |   |                       | 11.75 lb                              |
| V Isolation @ 25C  |   | $V_{rms}$             | 3000 V                                |

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**POW-R-BLOK™**  
**Dual SCR Isolated Module**  
**700 Amperes / Up to 1800 Volts**

**Electrical Characteristics, T<sub>J</sub>=25° C unless otherwise specified**

| Characteristics                          | Symbol               | Test Conditions  | Min.                     | Max.   | Units |
|--|----------------------|--|--------------------------|--|-------|
| Repetitive Peak Forward Leakage Current  | I <sub>DRM</sub>     | Up to 1800V, T <sub>J</sub> =125° C  |                          | 100  | mA    |
| Repetitive Peak Reverse Leakage Current  | I <sub>RRM</sub>     | Up to 1800V, T <sub>J</sub> =125° C  |                          | 100  | mA    |
| Peak On-State Voltage                    | V <sub>TM</sub>      | I <sub>TM</sub> =3000A, T <sub>J</sub> =125° C   |                          | 1.30   | V     |
| Threshold Voltage, Low-level             | V <sub>(TO)1</sub>   | T <sub>J</sub> = 125° C, I = 15%I <sub>T(AV)</sub> to πI <sub>T(AV)</sub>                |                          | 0.703  | V     |
| Slope Resistance, Low-level              | r <sub>T1</sub>      |  |                          | 0.184  | mΩ    |
| Threshold Voltage, High-level            | V <sub>(TO)2</sub>   | T <sub>J</sub> = 125° C, I = πI <sub>T(AV)</sub> to I <sub>TSM</sub>                     |                          | 1.01   | V     |
| Slope Resistance, High-level             | r <sub>T2</sub>      |  |                          | 0.117  | mΩ    |
| V <sub>TM</sub> Coefficients, Full Range |                      | T <sub>J</sub> = 125° C, I = 50A to 6kA<br>V <sub>TM</sub> = A + B Ln I + C I + D Sqrt I | A =<br>B =<br>C =<br>D = | 0.7999<br>-4.62 E-02<br>7.33 E-05<br>1.10 E-02 |       |
| Minimum dV/dt                            | dV/dt                | Exponential to 0.67V <sub>DRM</sub><br>T <sub>J</sub> =125° C, Gate Open                 | 600                      |  | V/μs  |
| Gate Trigger Current                     | I <sub>GT</sub>      | T <sub>J</sub> =25° C, V <sub>D</sub> =12V   |                          | 200  | mA    |
| Gate Trigger Voltage                     | V <sub>GT</sub>      | T <sub>J</sub> =25° C, V <sub>D</sub> =12V   |                          | 3.0  | Volts |
| Non-Triggering Gate Voltage              | V <sub>GDM</sub>     | T <sub>J</sub> =125° C, V <sub>D</sub> = ½ V <sub>DRM</sub>                              |                          | 0.15   | Volts |
| Holding Current                          | I <sub>H</sub>       |  |                          | 300  | mA    |
| Peak Forward Gate Current                | I <sub>GMT</sub>     |  |                          | 4.0  | Amp   |
| Peak Reverse Gate Voltage                | V <sub>GDM</sub>     |  |                          | 5  | Volts |
| Maximum Average Gate Power Dissipation   | P <sub>GM(AVE)</sub> |  |                          | 16   | Watts |


**Thermal Characteristics**

| Characteristics                             | Symbol            |  | Max.                       | Units                      |
|---|-------------------|--|----------------------------|----------------------------|
| Thermal Resistance, Junction to Case        | R <sub>θJ-C</sub> | Per Module, both conducting                                    | 0.029                      | °C/W                       |
|   |                   | Per Junction, both conducting                                  | 0.058                      | °C/W                       |
| Thermal Impedance Coefficients              | Z <sub>θJ-C</sub> | Z <sub>θJ-C</sub> = K <sub>1</sub> (1-exp(-t/τ <sub>1</sub> )) | K <sub>1</sub> = 5.04 E-04 | τ <sub>1</sub> = 2.47 E-03 |
|   |                   | + K <sub>2</sub> (1-exp(-t/τ <sub>2</sub> ))                   | K <sub>2</sub> = 2.31 E-03 | τ <sub>2</sub> = 4.42 E-02 |
|   |                   | + K <sub>3</sub> (1-exp(-t/τ <sub>3</sub> ))                   | K <sub>3</sub> = 2.83 E-03 | τ <sub>3</sub> = 1.370     |
|   |                   | + K <sub>4</sub> (1-exp(-t/τ <sub>4</sub> ))                   | K <sub>4</sub> = 5.24 E-02 | τ <sub>4</sub> = 9.668     |
| Thermal Resistance, Case to Sink Lubricated | R <sub>θC-S</sub> | Per Module   | 0.009                      | °C/W                       |


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

### Dual SCR Module 700 Amperes / Up to 1800 Volts


Typical On-State Forward Voltage Drop  
( $T_j = 125^\circ\text{C}$ )

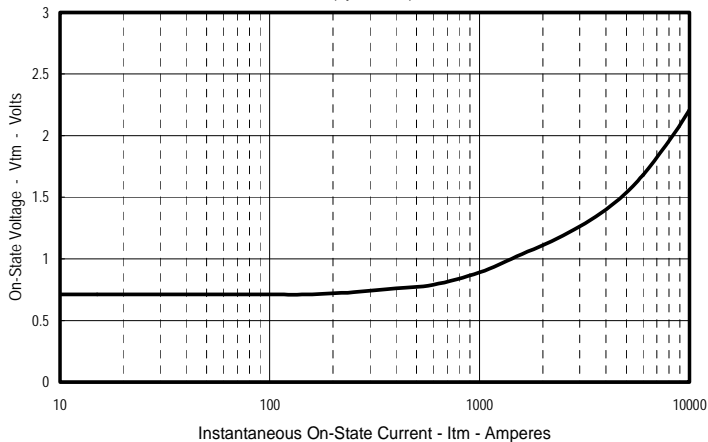


Maximum Transient Thermal Impedance  
(Junction To Case)

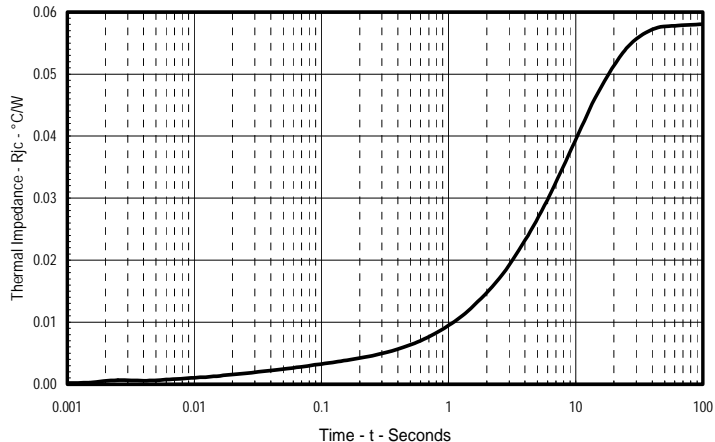


Maximum On-State Power Dissipation  
(Sinusoidal Waveform)

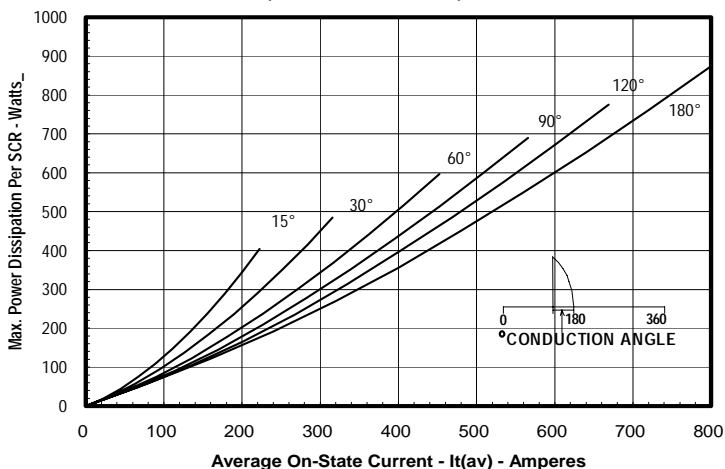


Maximum Allowable Case Temperature  
(Sinusoidal Waveform)

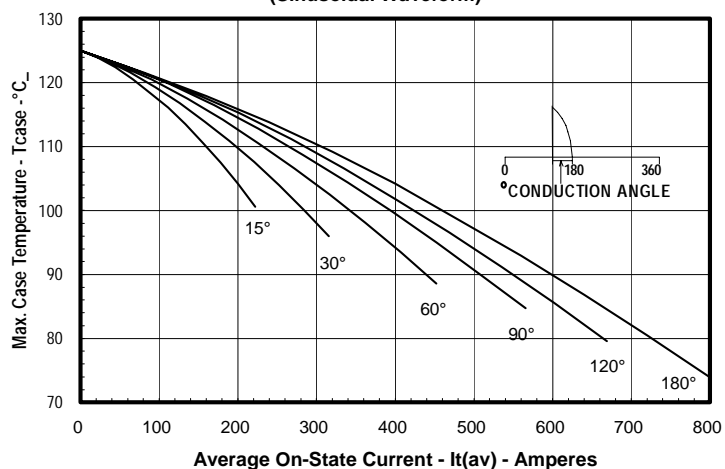

Maximum On-State Power Dissipation  
(Rectangular Waveform)

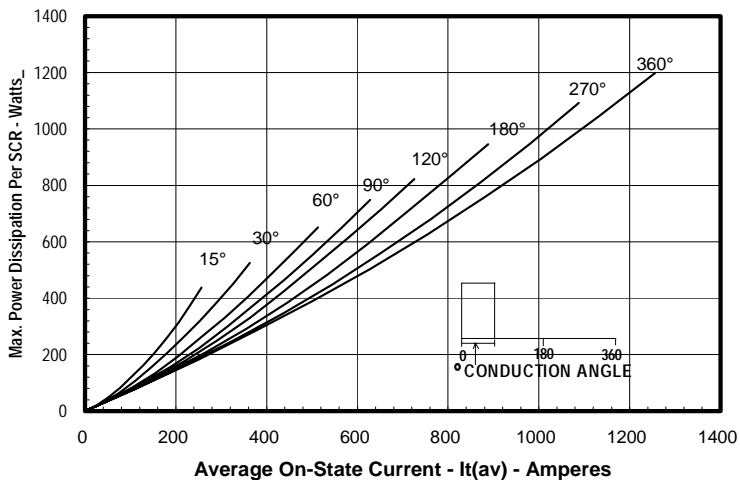

Maximum Allowable Case Temperature  
(Rectangular Waveform)

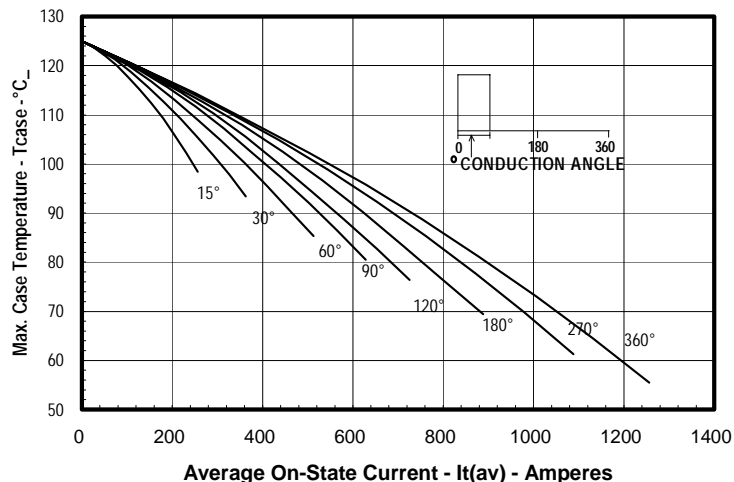

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

**Dual SCR Module**  
700 Amperes / Up to 1800 Volts

| DIM. | INCHES | MILLIMETERS |
|------|--------|-------------|
| A    | 7.80   | 198.1       |
| B    | 4.00   | 101.6       |
| C    | 2.68   | 68.1        |
| D    | 6.44   | 163.6       |
| E    | 3.44   | 87.4        |
| F    | .28    | 7.1         |
| G    | 7.31   | 185.7       |
| H    | 7.00   | 177.8       |
| J    | 1.65   | 42          |
| K    | .21    | 5.3         |
| L    | .28    | 7.1         |
| M    | .281   | 7.1         |
| N    | .45    | 11.4        |
| P    | .54    | 13.7        |
| Q    | 5.93   | 150.6       |
| R    | .19    | 4.8         |
| S    | .11    | 2.8         |
| T    | .48    | 12.2        |
| U    | 2.28   | 58          |
| V    | 2.34   | 64.5        |
| W    | 4.93   | 125.2       |
| X    | 3.81   | 96.8        |
| Y    | .03    | .8          |
| Z    | 2.00   | 50.8        |
| AA   | 1.00   | 25.4        |
| BB   | .50    | 12.7        |
| CC   | 1.00   | 25.4        |
| DD   | .406   | 10.3        |
| EE   | 2.87   | 72.9        |
| FF   | .66    | 16.8        |

