


## P600A thru P600M

### General Purpose Plastic Rectifier



#### FEATURES

- Low forward voltage drop
- Low leakage current
- High forward current capability
- High forward surge capability
- Solder dip 275 °C max. 10 s.

#### MECHANICAL DATA

**Case:** P600, void-free molded epoxy body  
 Molding compound meets UL 94 V-0 flammability rating  
 Base P/N-E3 - RoHS compliant, commercial grade

**Terminals:** Matte tin plated leads, solderable per  
 J-STD-002 and JESD 22-B102  
 E3 suffix meets JESD 201 class 1A whisker test

**Polarity:** Color band denotes cathode end


#### PRIMARY CHARACTERISTICS

$I_{F(AV)}$	6.0 A
$V_{RRM}$	50 V to 1000 V
$I_{FSM}$	400 A
$V_F$	0.9 V, 1.0 V
$I_R$	5.0 $\mu$ A
$T_J$ max.	150 °C

#### MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	P600A	P600B	P600D	P600G	P600J	P600K	P600M	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at	$I_{F(AV)}$	$T_A = 60$ °C, 0.375" (9.5 mm) lead length (fig. 1)							A
		$T_L = 60$ °C, 0.125" (3.18 mm) lead length (fig. 2)							
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	400							A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 50 to + 150							°C

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



ELECTRICAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)										
PARAMETER	TEST CONDITIONS	SYMBOL	P600A	P600B	P600D	P600G	P600J	P600K	P600M	UNIT
Maximum instantaneous forward voltage	6.0 A	$V_F$	0.90						1.0	V
	100 A		1.30						1.4	
Maximum DC reverse current at rated DC blocking voltage		$I_R$	5.0						$\mu\text{A}$	
			$T_A = 100\text{ }^\circ\text{C}$	1.0						mA
Typical reverse recovery time	$I_F = 0.5\text{ A}$ , $I_R = 1.0\text{ A}$ , $t_{rr} = 0.25\text{ A}$	$t_{rr}$	2.5						$\mu\text{s}$	
Typical junction capacitance	4.0 V, 1 MHz	$C_J$	150						pF	

THERMAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	P600A	P600B	P600D	P600G	P600J	P600K	P600M	UNIT	
Typical thermal resistance	$R\theta_{JA}^{(1)}$	20						$^\circ\text{C/W}$		
	$R\theta_{JL}^{(1)}$	4.0								

**Note**

(1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5 mm) lead length, P.C.B. mounted with 1.1" x 1.1" (30 mm x 30 mm) copper pads

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
P600J-E3/54	2.1	54	800	13" diameter paper tape and reel
P600J-E3/73	2.1	73	300	Ammo pack packaging

**RATINGS AND CHARACTERISTICS CURVES**

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

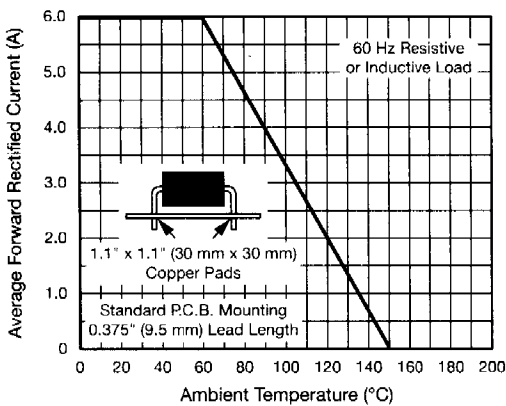


Fig. 1 - Maximum Forward Current Derating Curve

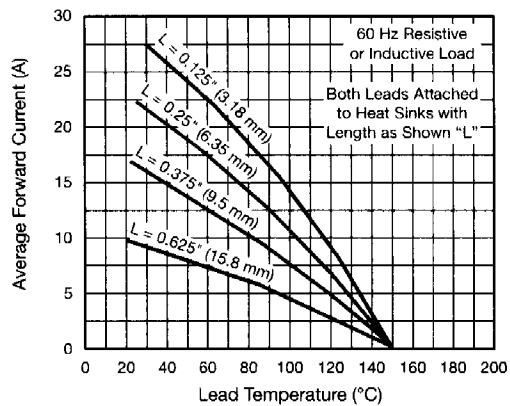


Fig. 2 - Maximum Non-repetitive Forward Surge Current

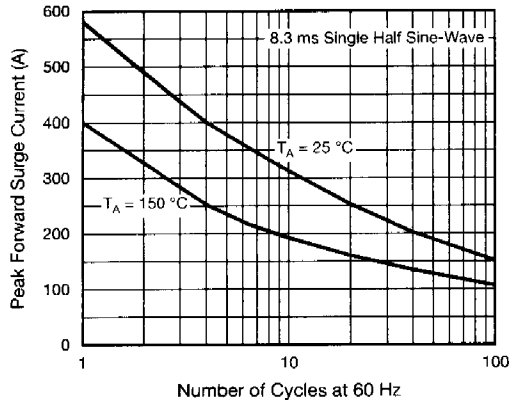


Fig. 3 - Typical Instantaneous Forward Characteristics

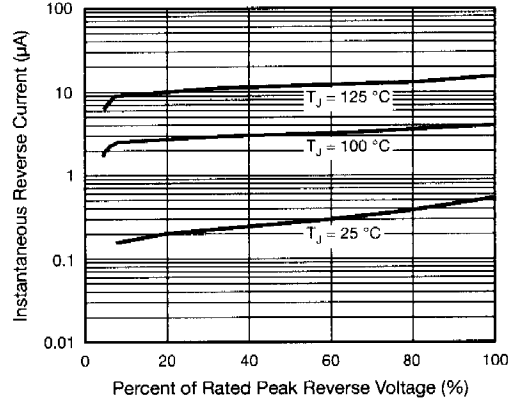


Fig. 5 - Typical Reverse Characteristics

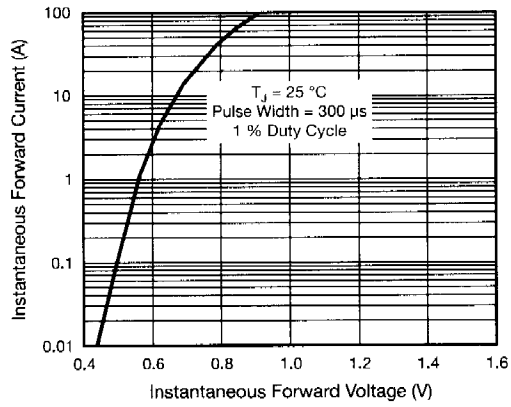


Fig. 4 - Typical Instantaneous Forward Characteristics

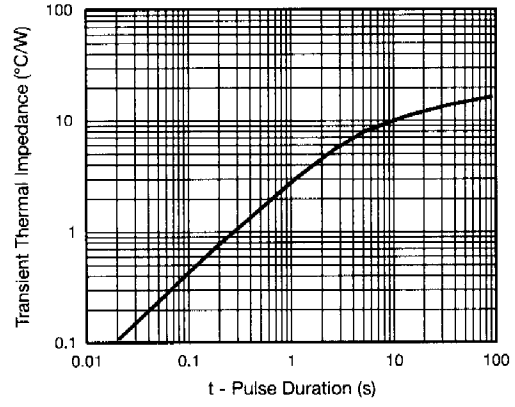


Fig. 6 - Typical Transient Thermal Impedance

**PACKAGE OUTLINE DIMENSIONS** in inches (millimeters)

