




RC-730

19" 3U High, Full-size Rackmount Chassis with MainBoard, Riser Card, 300W ATX P/S

Industrial Chassis

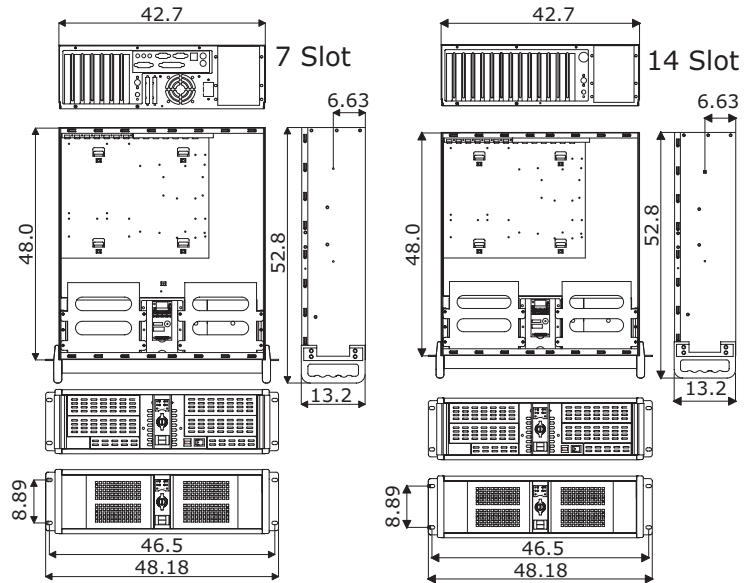

Features

- ◆ 19" 3U high, rackmount chassis compliant to EIA RS-310C standard
- ◆ Detachable card cage for easy installation and maintenance
- ◆ Provides mainboard, riser card, 300W ATX power supply
- ◆ External: 5.25" space x 4 + 3.5" space x 2
Internal: 3.5" space x 1
- ◆ 7-slot has 6cm ball bearing cooling fan x 1, optional 8cm ball bearing cooling fan x 3;
14-slot has 8cm ball bearing cooling fan x 3 (optional)
- ◆ Dual lockable latch doors
- ◆ FCC/CE industrial Class A approval
- ◆ System environmental monitor (optional)

Specifications

Chassis

Meets EIA RS-310C 19" 3U high, rackmount standard; heavy-duty steel, SECC 1.2t (Japan)

Drive Space

External: 5.25" space x 4 + 3.5" space x 2

Internal: 3.5" space x 1

Front Panel

Power switch, reset button and USB or PS/2 keyboard connectors; power and HDD active LED

Thermal Solution

System environmental monitor (optional) and removable air filter;

7-slot: 6cm ball bearing cooling fan x 1, optional 8cm ball bearing cooling fan x 3;

14-slot: 8cm ball bearing cooling fan x 3 (optional)

Altitude

15,000 feet

Power Supply

300W ATX power supply

Temperature

0~+50°C (operating); 0~+70°C (storage)

Humidity

5~95%; non-condensing

Safety Standard

FCC/CE on chassis and FCC/CE/UL/TUV on power supply

Dimensions (L x W x H)

48.0 x 42.7 x 13.2 cm

Ordering Guide

- ◆ **RC-730B**
19" 3U High, Full-size Rackmount Chassis (notify 7 or 14-slot, AT or ATX)
- ◆ **RC-730BA**
RC-730B Chassis w/2U 300W PFC ATX P/S

Accessory Options

HPP-6S (by order)

6-slot Riser Card