

## RMWM38001

### 38 GHz Mixer MMIC


#### General Description

The RMWM38001 is a 38 GHz Mixer designed for use in point to point and point to multi-point radios, and various communications applications. In conjunction with other Fairchild RF Components amplifiers, multipliers and mixers it forms part of a complete 38 GHz transmit/receive chipset. The RMWM38001 is a GaAs MMIC diode mixer utilizing our 0.25 $\mu$ m power PHEMT process. The MMIC can be used as both an Upconverter and a Downconverter and is sufficiently versatile to serve in a variety of mixer applications.

#### Features

- 4mil substrate
- Conversion loss 5dB (Upconverter)
- Conversion loss 8dB (Downconverter)
- No DC bias required
- Chip size 1.4mm x 1.4mm

#### Device



#### Absolute Ratings

Symbol	Parameter	Ratings	Units
P <sub>IN</sub>	RF Input Power (from 50 $\Omega$ source)	+25	dBm
T <sub>C</sub>	Operating Baseplate Temperature	-30 to +85	°C
T <sub>stg</sub>	Storage Temperature Range	-55 to +125	°C

#### Electrical Characteristics (At 25°C), 50 $\Omega$ system, LO = +12 dBm

Parameter	Min	Typ	Max	Units
RF Frequency Range	37		40	GHz
LO Frequency Range		32–35		GHz
IF Frequency Range		4.7–5.3		GHz
LO Drive Power		12	16	dBm
Up Conversion Loss		5		dB
Down Conversion Loss <sup>1</sup>		8	10	dB
Conversion Loss Variation vs Freq.		3		dB

**Note:**

1: Device 100% RF tested as downconverter only. LO drive = +12dBm, RF Pin = -10dBm, IF = 5GHz.

## Application Information

### CAUTION: THIS IS AN ESD SENSITIVE DEVICE.

Chip carrier material should be selected to have GaAs compatible thermal coefficient of expansion and high thermal conductivity such as copper molybdenum or copper tungsten. The chip carrier should be machined, finished flat, plated with gold over nickel and should be capable of withstanding 325°C for 15 minutes.

Die attachment should utilize Gold/Tin (80/20) eutectic alloy solder and should avoid hydrogen environment for PHEMT devices. Note that the backside of the chip is gold plated and is used as RF ground.

These GaAs devices should be handled with care and stored in dry nitrogen environment to prevent contamination of bonding surfaces. These are ESD sensitive devices and should be handled with appropriate precaution including the use of wrist grounding straps. All die attach and wire/ribbon bond equipment must be well grounded to prevent static discharges through the device.

Recommended wire bonding uses 3mils wide and 0.5mil thick gold ribbon with lengths as short as practical allowing for appropriate stress relief. The RF input and output bonds should be typically 0.012" long corresponding to a typical 2mil gap between the chip and the substrate material.

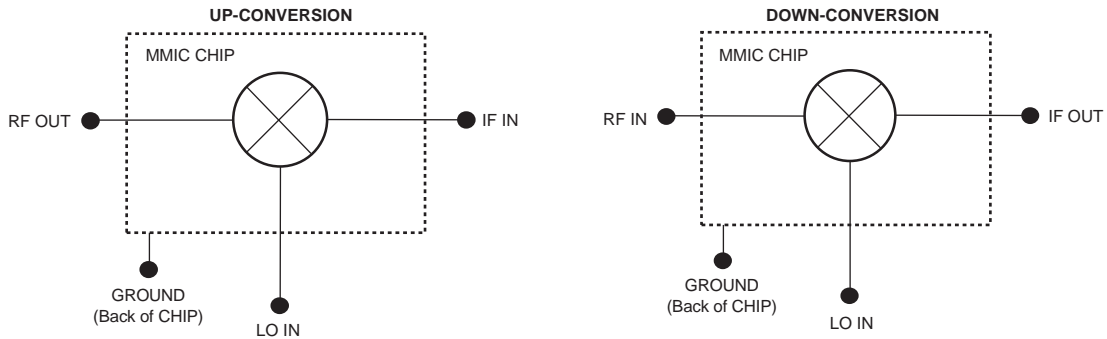


Figure 1. Functional Block Diagram

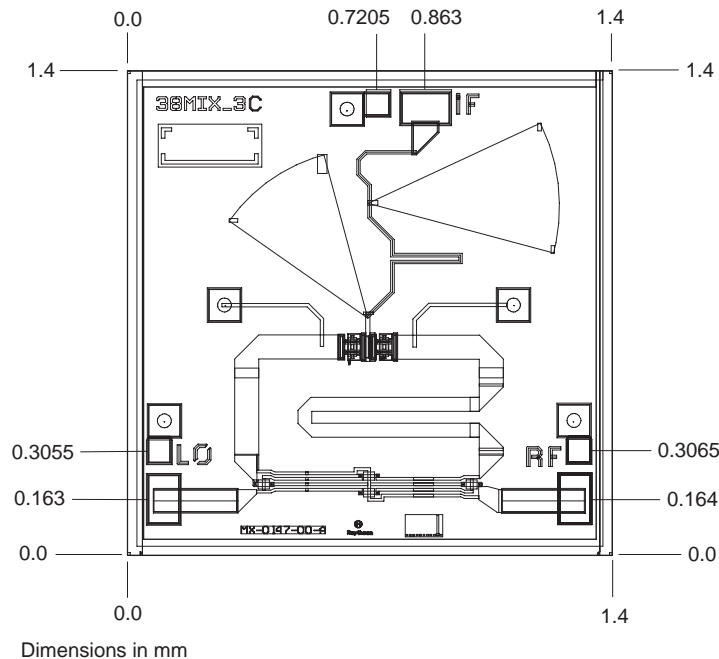


Figure 2. Chip Layout and Bond Pad Locations  
(Chip Size is 1.4mm x 1.4mm x 100µm. Back of chip is RF Ground)

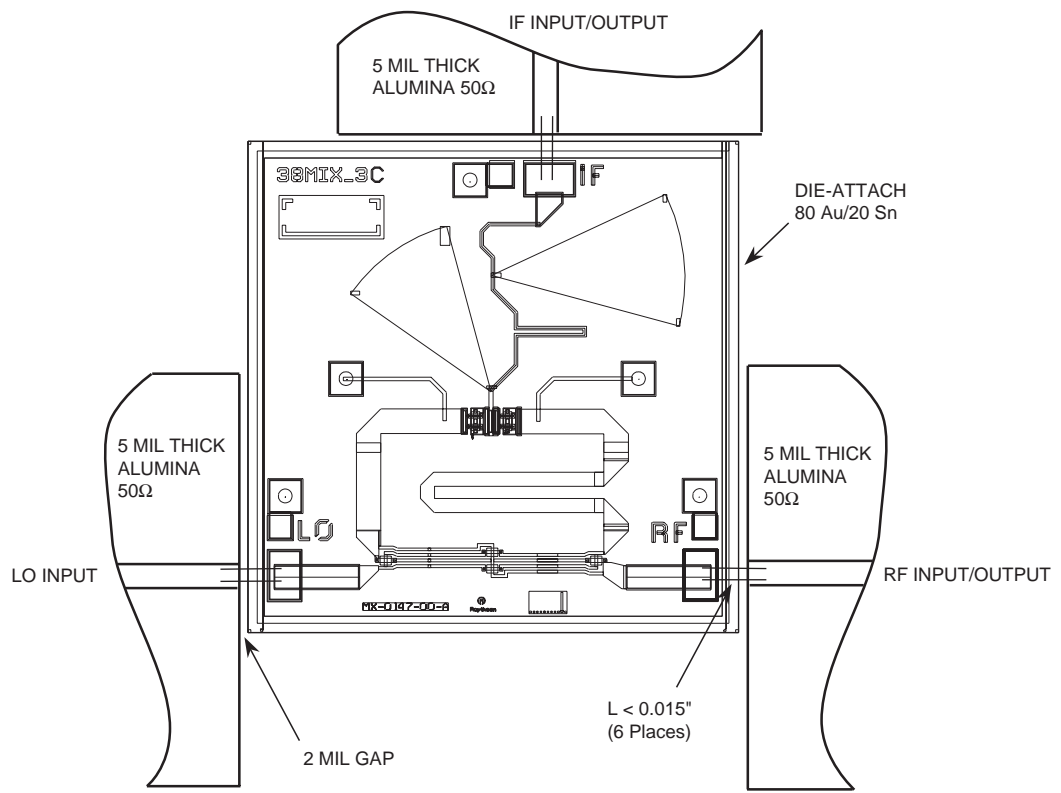


Figure 3. Recommend Assembly Diagram<sup>1</sup>

**Note:**

1: Use 0.003" by 0.0005" Gold Ribbon for bonding. RF input and output bonds should be less than 0.015" long with stress relief.

**Recommended Procedure for Operation**

**CAUTION: THIS IS AN ESD SENSITIVE DEVICE**

The RMWM38001 does not require DC bias. Apply RF input signal at the appropriate frequency band and input driver level.

### Typical Characteristics

PMWM38001 38 GHz Mixer On-Wafer Performance UpConverter.  
LO Drive Power = 12dBm

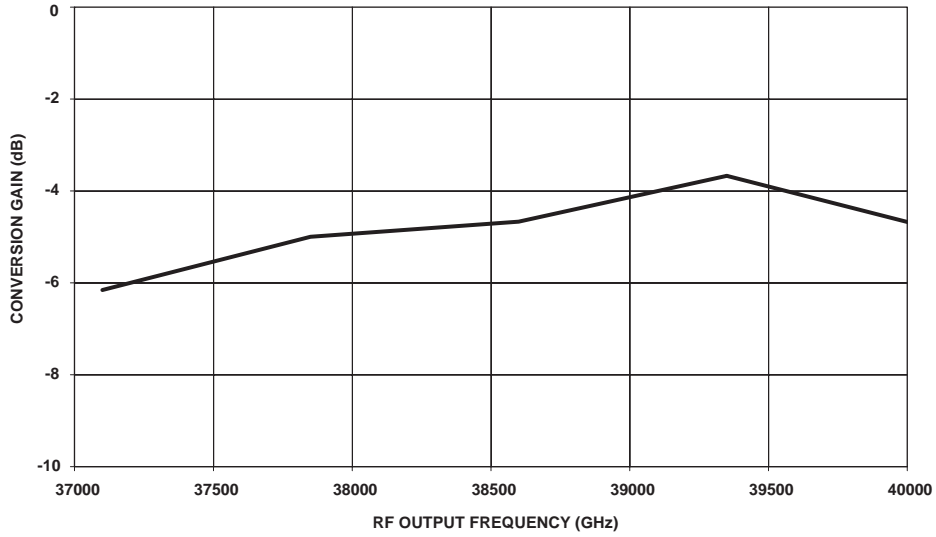


Figure 4.

PMWM38001 38 GHz Typical On-Wafer Performance DownConverter.  
LO Drive Power = 12dBm

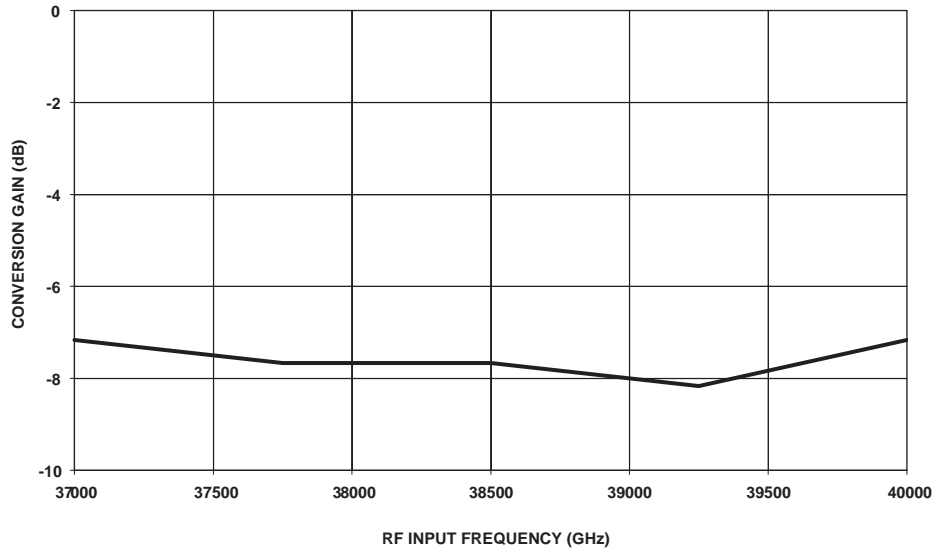


Figure 5.

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST®	ISOPLANAR™	Power247™	SuperFET™
ActiveArray™	FASTr™	LittleFET™	PowerSaver™	SuperSOT™-3
Bottomless™	FPST™	MICROCOUPLER™	PowerTrench®	SuperSOT™-6
CoolFET™	FRFET™	MicroFET™	QFET®	SuperSOT™-8
CROSSVOLT™	GlobalOptoisolator™	MicroPak™	QS™	SyncFET™
DOMET™	GTO™	MICROWIRE™	QT Optoelectronics™	TinyLogic®
EcoSPARK™	HiSeC™	MSX™	Quiet Series™	TINYOPTO™
E <sup>2</sup> C MOS™	ꞑC™	MSXPro™	RapidConfigure™	TruTranslation™
EnSigna™	i-Lo™	OCX™	RapidConnect™	UHC™
FACT™	ImpliedDisconnect™	OCXPro™	µSerDes™	UltraFET®
FACT Quiet Series™		OPTOLOGIC®	SILENT SWITCHER®	VCX™
Across the board. Around the world.™		OPTOPLANAR™	SMART START™	
The Power Franchise®		PACMAN™	SPM™	
Programmable Active Droop™		POP™	Stealth™	

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.