




# RS401 THRU RS407

## SILICON BRIDGE RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 4.0 Amperes

### RS-4

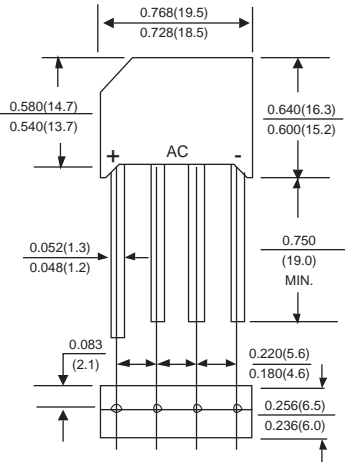

Dimensions in inches and (millimeters)

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
260°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on case

**Mounting Position:** Any

**Weight:** 0.22 ounce, 6.21 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	RS401	RS402	RS403	RS404	RS405	RS406	RS407	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward output rectified current at $T_c=50^\circ\text{C}$ (Note 2) $T_A=50^\circ\text{C}$ (Note 3)	$I_{(AV)}$	4.0 3.0						Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	150						Amps	
Rating for Fusing ( $t < 8.3\text{ms}$ )	$I^2t$	93						$\text{A}^2\text{s}$	
Maximum instantaneous forward voltage drop per bridge element at 4.0A	$V_F$	1.0						Volts	
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	$I_R$	10 1.0						$\mu\text{A}$ mA	
Typical Junction Capacitance (Note 1)	$C_J$	55						pF	
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	20						$^\circ\text{C}/\text{W}$	
Operating junction temperature range	$T_J$	-65 to +150						$^\circ\text{C}$	
storage temperature range	$T_{STG}$	-55 to +150						$^\circ\text{C}$	

#### NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.

2. Unit mounted on 3.0" x 3.0" x 0.11" thick (7.5x7.5x0.3cm) Al. plate.

3. P.C. Board mounted with 0.5" x 0.5" (12x12mm) copper pads, 0.375" (9.5mm) lead length.

# RATINGS AND CHARACTERISTIC CURVES RS401 THRU RS407

