




# S5ABF THRU S5MBF

**SURFACE MOUNT GENERAL PURPOSE SILICON RECTIFIER**  
 Reverse Voltage - 50 to 1000 Volts Forward Current - 5.0 Amperes

## SMBF

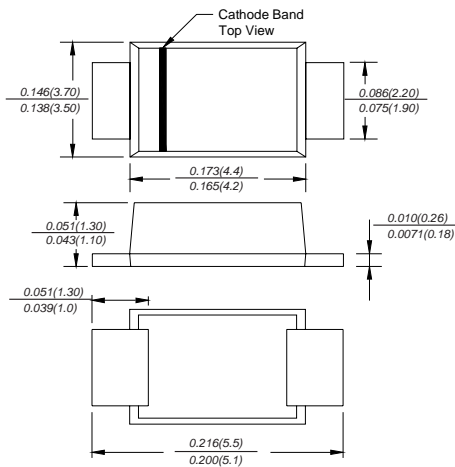

## FEATURES

- ◆ For surface mounted applications
- ◆ Low profile package
- ◆ Glass Passivated Chip Junction
- ◆ Easy to pick and place
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

## MECHANICAL DATA

**Case:** JEDEC SMBF molded plastic body  
**Terminals:** leads solderable per MIL-STD-750, Method 2026  
**Mounting Position:** Any  
**Weight:** 57mg/0.002oz

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


MDD Catalog Number	SYMBOLS	S5ABF	S5BBF	S5DBF	S5GBF	S5JBF	S5KBF	S5MBF	UNITS
Marking code		S5AB	S5BB	S5DB	S5GB	S5JB	S5KB	S5MB	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_L=65^\circ\text{C}$	$I_{(AV)}$	5.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	125							Amps
Maximum instantaneous forward voltage at 5.0A	$V_F$	1.1							Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=125^\circ\text{C}$	$I_R$	5.0 150.0							$\mu\text{A}$
Typical junction capacitance (NOTE 1)	$C_J$	45							pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	40							$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. P.C.B. mounted with 0.5x0.5" (12.7x12.7mm) copper pad areas




# RATINGS AND CHARACTERISTIC CURVES S5ABF THRU S5MBF


**Fig.1 Forward Current Derating Curve**

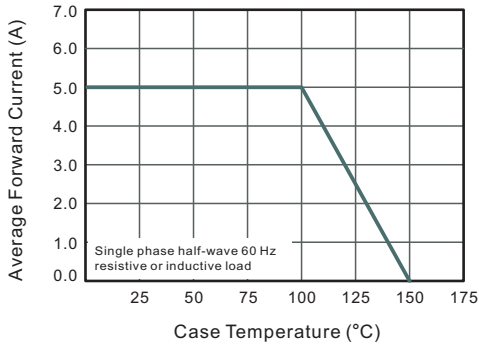


**Fig.2 Typical Reverse Characteristics**

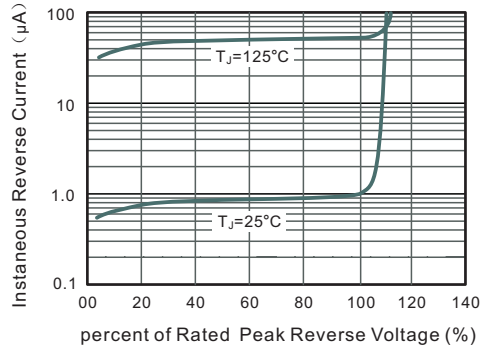


**Fig.3 Typical Forward Characteristic**

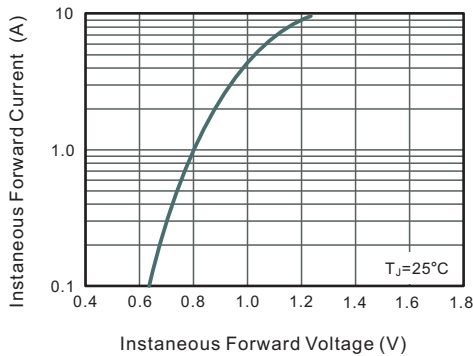

**Fig.4 Typical Junction Capacitance**

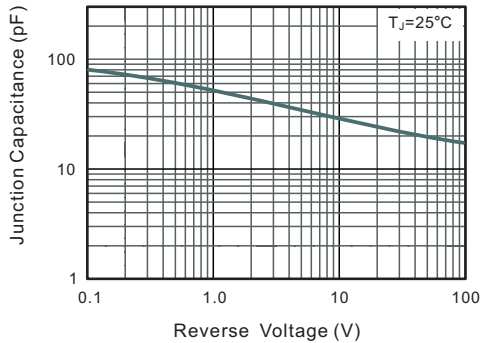

**Fig.6 Maximum Non-Repetitive Peak Forward Surge Current**

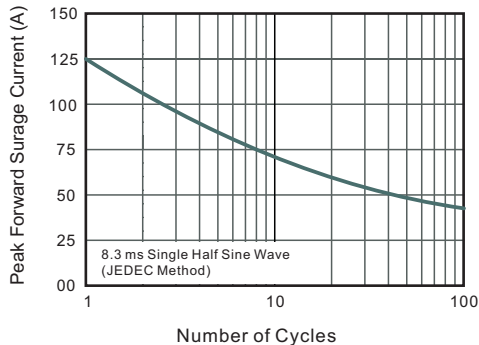

The curve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

