



SB520 THRU SB5100

SCHOTTKY BARRIER RECTIFIER


Reverse Voltage - 20 to 100 Volts Forward Current - 5.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-201AD molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.04 ounce, 1.10 grams

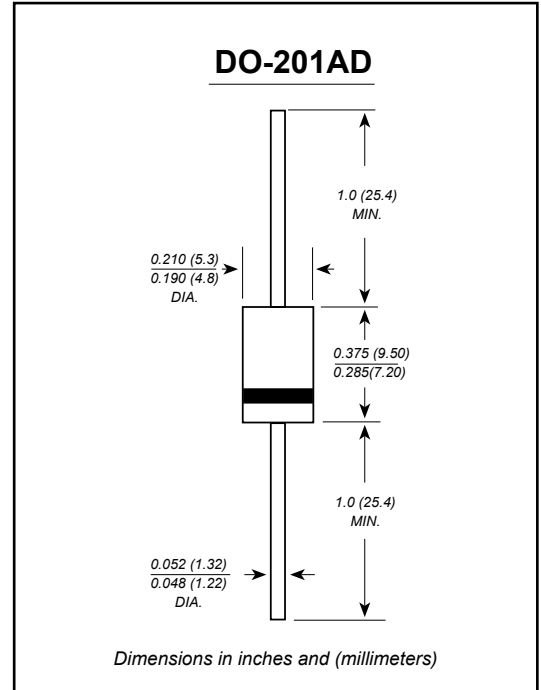

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristic	SYMBOLS	SB520	SB540	SB560	SB580	SB5100	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	80	100	V
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	40	60	80	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig.1)	I _(AV)	5.0					A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0					A
Maximum instantaneous forward voltage at 5.0A	V _F	0.55		0.70		0.85	V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5					mA
		50.0		25.0			
Typical junction capacitance (NOTE 1)	C _J	500		400			pF
Typical thermal resistance (NOTE 2)	R _{θJA}	25.0					°C/W
Operating junction temperature range	T _J	-65 to +125		-65 to +150			°C
Storage temperature range	T _{STG}	-65 to +150					°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



SB520 THRU SB5100

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

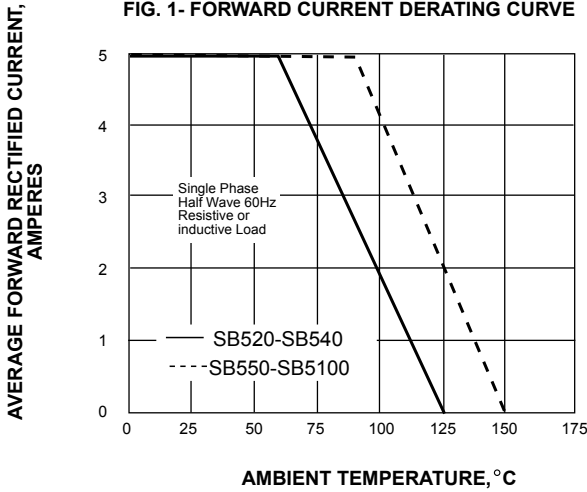


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

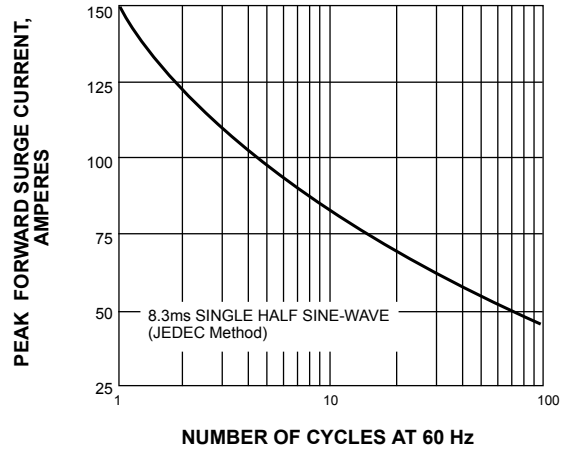


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

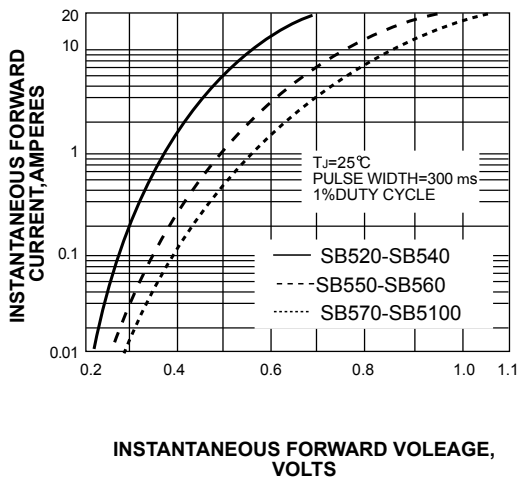


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

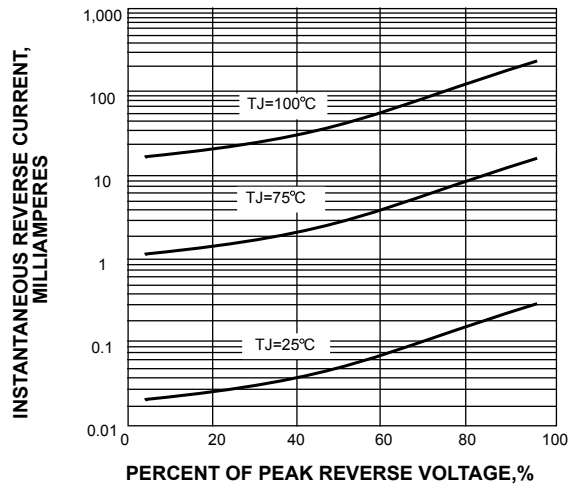


FIG. 5-TYPICAL JUNCTION CAPACITANCE

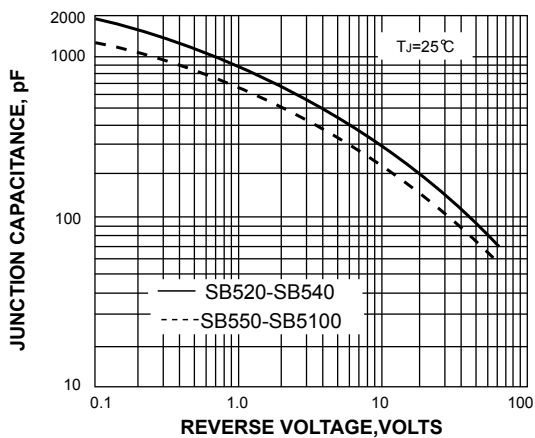


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

