

RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free

FEATURES


- High Current Capability
- Extremely Low Thermal Resistance
- For Surface Mount Application
- Higher Temp Soldering : 250 °C for 10 Seconds At Terminals
- Low Forward Voltage

MECHANICAL DATA

Case: Molded plastic
Epoxy: UL 94V-0 rate flame retardant
Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
Polarity: Color band denotes cathode end
Mounting position: Any

PACKAGE DIMENSIONS

SOD-123
PLASTIC PACKAGE

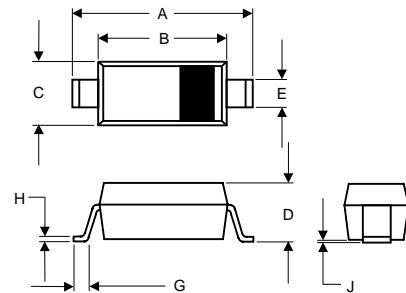

DIM	MILLMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.55	3.85	0.140	0.152
B	2.55	2.85	0.100	0.112
C	1.40	1.80	0.550	0.071
D	-----	1.15	-----	0.045
E	0.30	0.78	0.120	0.031
G	0.15	-----	0.006	-----
H	-----	0.25	-----	0.001
J	-----	0.15	-----	0.006

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SCK120LP	SCK140LP	UNITS
Maximum Recurrent Peak Reverse Voltage	20	40	V
Working Peak Reverse Voltage	20	40	
Maximum DC Blocking Voltag	20	40	V
Average Forward Current ($I_{F(AV)}$) @ $T_J = 90^\circ\text{C}$)		1.0	A
Reak Forward Current (I_{FSM} @ 8.3ms half sine)		10	A
Maximum Instantaneous Forward Voltage ($V_F @ I_{FM} = 1.0\text{A}$, $T_A = 25^\circ\text{C}$)	0.37	0.46	V
Maximum DC Reverse Current At Rated DC Blocking Voltage (I_R @ $T_J = 25^\circ\text{C}$)	1.0	0.1	mA
Typical Junction Capacitance (C_J)		60	pF
Operating Temperature Range T_J		-50 ~ +125	°C
Storage Temperature Range T_{STG}		-65 ~ +150	°C

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.

Marking Code	
SCK120LP	KA
SCK140LP	KC

RATING AND CHARACTERISTIC CURVES (SCK120LP THRU SCS140LP)

FIG.1 TYPICAL FORWARD CHARACTERISTICS

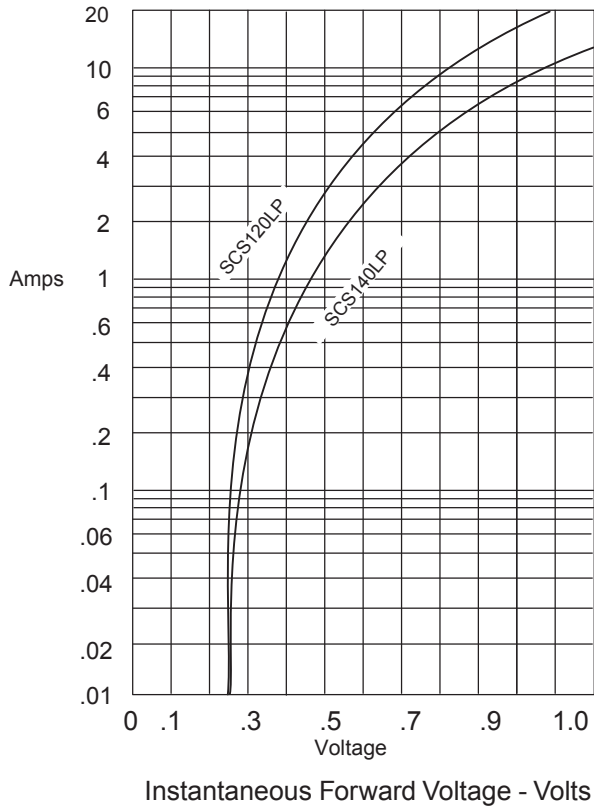


FIG.2-JUNCTION CAPACITANCE

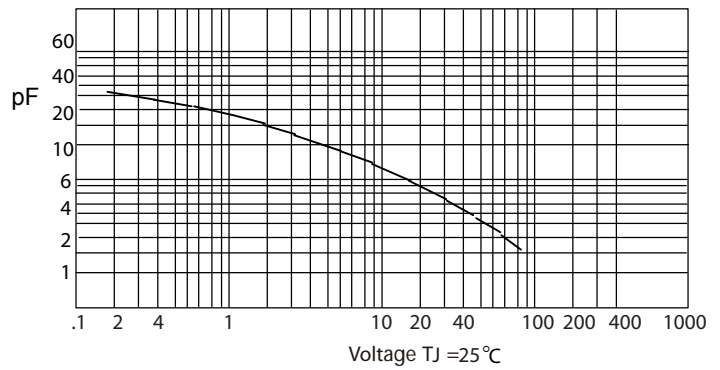


FIG.3-FORWARD DERATING CURVE

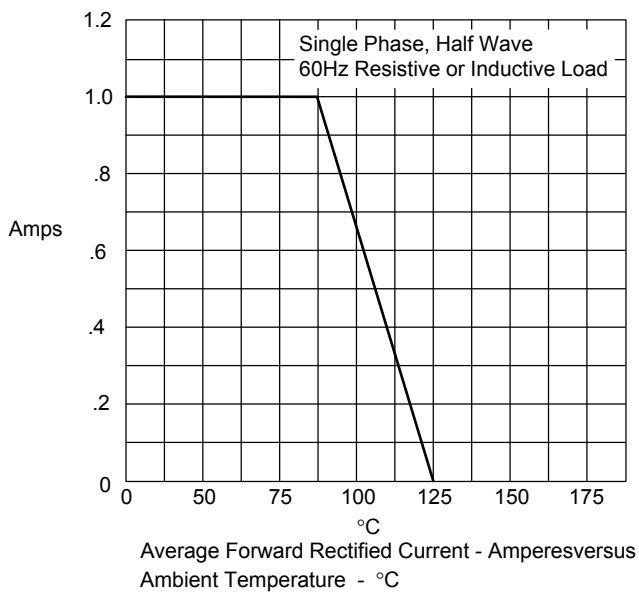


FIG.4-PEAK FORWARD SURGE CURRENT

