

A.D.A compliant


### Specification

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)


Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- 98% P.F.electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1 - One piece cast aluminum removable housing for ease of access to lamp and ballast.
- 2- White translucent sealed high impact acrylic diffuser.
- 3 - Isolated ballast compartment for compact fluorescent electronic ballast.
- 4- Multiple cast aluminum louver blades built in assembly.

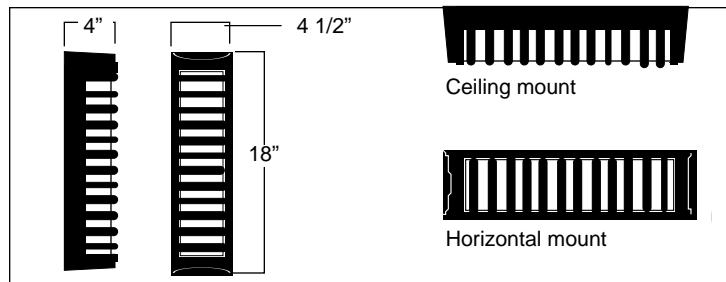

### Photometry

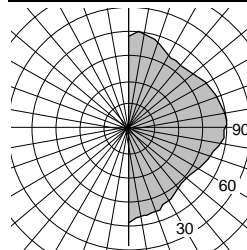



Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on [www.luminis.com](http://www.luminis.com).

### Certification

UL. Wet Location.

### Mounting

Max. weight: 6 lbs.  
Installation: Mounts over a standard 4" octagonal electrical box with 3 1/2" c/c mounting holes. (by others ) additional separate mounting holes are provided with wall plate.

Model#	Light source selection	Voltage	Finish	Options
<input type="checkbox"/> SL100 	<input type="checkbox"/> PL-L 2G11 <input type="checkbox"/> Single lamp <input type="checkbox"/> F124 (1x24W)	<input type="checkbox"/> COMP. FLUO. <input type="checkbox"/> Smart ballast 120/277 <input type="checkbox"/> 347 V (To specify)	<u>Standard selection</u> <input type="checkbox"/> WHT: Snow white <input type="checkbox"/> BKT: Jet black <input type="checkbox"/> BZT: Bronze <input type="checkbox"/> GRT: Titanium gray <input type="checkbox"/> DGT: Gun metal <input type="checkbox"/> CHT: Champagne <input type="checkbox"/> MST: Matte silver <input type="checkbox"/> GNT: Forest green <u>Optional colors</u> <input type="checkbox"/> CS: Custom color <input type="checkbox"/> RAL: RAL# color	<input type="checkbox"/> SC Round column adaptor  Indicate column diameter in inches. 12" Min. dia. Ex: SC24 (24"Dia..)
(Lamps by others)				

luminaires may be altered for design improvements or discontinued without prior notice.