



### Features

- Miniature relay with high switching capability : 40A.
- Contact form : Form A or 1Form C.
- Special type of 4000VAC dielectric strength and 6000V surge voltage (1.2/50uS) between coil and contact available
- Sealed type.
- Patent Number: ZL 2008 20050972.1
- Satisfy IEC60335-1 product is available.
- Satisfy IEC60079-15 product is available.

### Safety Approval

UL , C-UL File No. : E190598  
 CQC File No. : CQC02001002109

### Contact Capacity

Model	SLA-G
Nominal switching capacity (res. load)	40A 277VAC
Max. switching current	40A
Max. switching voltage	277VAC
Max. switching power	11,080VA

### Charateristic Data

Contact material	Silver alloy	
Initial contact resistance (at 6VDC 1A)	50mΩ Max.(1A 6VDC)	
Operate time (at nominal volt.)	15msec. Max. (no diode)	
Release time (at nominal volt.)	10msec. Max. (no diode)	
Initial insulation resistance	100MΩ Min.(DC500V)	
Initial dielectric strength	Between open contacts :	AC1,500V , 50/60Hz 1min
	Between coil and contact :	AC2,500V , 50/60Hz 1min. (4kV available)
Vibration resistance	Functional	10 ~ 55Hz at double amplitude of 1.5 mm
	Destructive	10 ~ 55Hz at double amplitude of 1.5 mm
Shock resistance	Functional	10G Min.
	Destructive	100G Min.
Endurance (operations)	Mechanical (at 7,200 ops./h)	10,000,000 cycles(at room temperature)
	Electrical (at 360 ops./h)	30,000 cycles(at room temperature)
Ambient temperature	-40°C ~ +75°C (no condensation)	
Unit weight	Sealed type: Approx. 24.0g	

### Coil Data (at 20 °C)

Nominal voltage (VDC)	Nominal operating current 10% ( mA)	Coil resistance 10% ( Ω)	Max. allowable voltage	Pick-up voltage (Max.)	Drop-out voltage (Min.)	Nominal operating power
5	180.00	27	130 % of nominal voltage	75 % of nominal voltage	5 % of nominal voltage	0.90W
6	150.00	40				
9	100.00	90				
12	75.00	160				
15	60.00	250				
18	50.00	360				
24	37.50	640				
48	18.75	2,560				
110	8.20	13,400				

### Safety Approval Ratings

(Note:More detail of approval ratings,please refer to the safety certification)


Approval	CQC	UL/CUL
File No.	CQC02001002109	E190598
Approved ratings	Form A : 30A 250VAC 40A 277VAC	Form A: 40A 277VAC, Resistive 30A 240VAC, Resistive/General Use 15A 240VAC 1-1/2HP 240VAC;3/4 HP 120VAC TV-8 120VAC 30A 120VAC, Resistive/General Use Pilot duty: 470 VA, 240VAC Electronic Ballast: 10A 277VAC /120VAC
	Form C : 20A/10A 250VAC 40A 277VAC	Form C: N.O. 40A 277VAC,Resistive 30A 240/120VAC,Resistive 30A 240/120VAC,General Use 20A 240VAC, Resistive 10A 240VAC, Resistive 1-1/2HP 240VAC 3/4HP 125/120VAC TV-8 120VAC 20A 240VAC, General Use Pilot Duty: 470VA 240VAC Electronic Ballast: 10A 277VAC/120VAC

- (1) The above-mentioned unspecified temperature ratings, means that the ambient temperature is room temperature.
- (2) Only some typical ratings are listed above. Each rating's test condition is different, so the electrical endurance will be different. If more details are required, please contact us.
- (3) For sealed type testing, please open the ventilation hole of case before test.


### Ordering Information

Nomenclature											
SLA	-S	-1	12	D	M	J	1	-G	-F	-XX	
Special Parameter : Nil-Standard type, Letter or number-Special requirement											
Insulation System : Nil-Standard, B-Class B, F-Class F											
Parameter sign : G-High contact load(40A),Double-layer spring,5.0 Contact											
Contact Material : Nil-AgSnO <sub>2</sub> , 1-AgCdO											
Terminal Type : Nil-Standard, J-Without 6# terminal											
Contact Form : Nil-Form C, M-Form A											
Coil Power : D-0.90W											
Coil Voltage (VDC) : 05, 06, 09, 12, 15, 18, 24, 48, 110											
Number of Poles : 1-1 Pole											
Protective Construction : S-Flux proofed,SH-Sealed type washable											
Type Designation : SLA											


Outline Dimensions, Wiring Diagram, P.C. Board Layout (unit : mm)

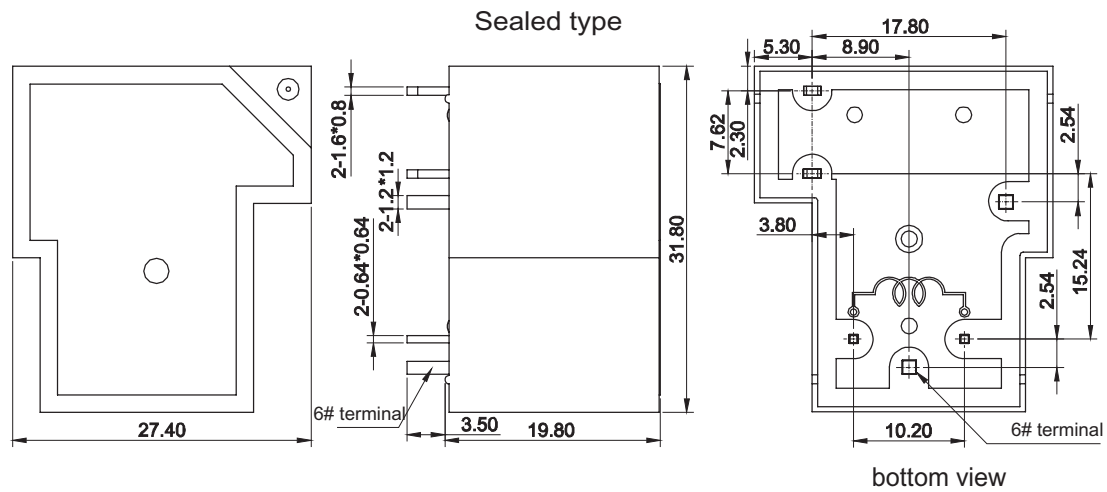

Unless otherwise specified :  
 If dimension < 1mm, tolerance : 0.2 mm;  
 If dimension 1~5mm, tolerance : 0.3 mm;  
 If dimension > 5mm, tolerance : 0.4 mm.  
 Note : 1. Extended terminal dimension is dimension before soldering.  
 2. Tolerance of P.C.B. layout : 0.1 mm.

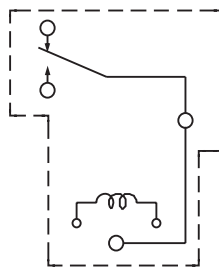


1c

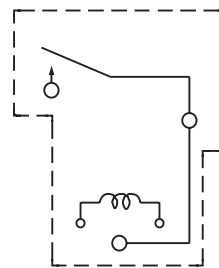


1a

Wiring Diagram (bottom view)

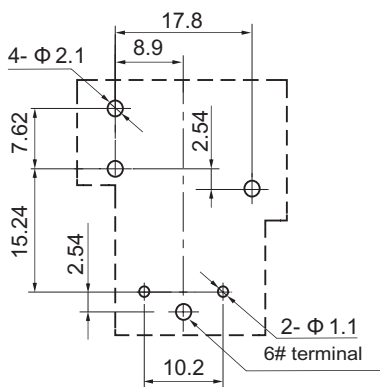

1c

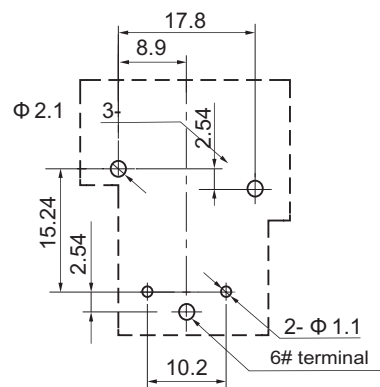


1a

P.C.B. Layout (bottom view)


Typical Applications

- Car
- UPS


## Characteristic Curves

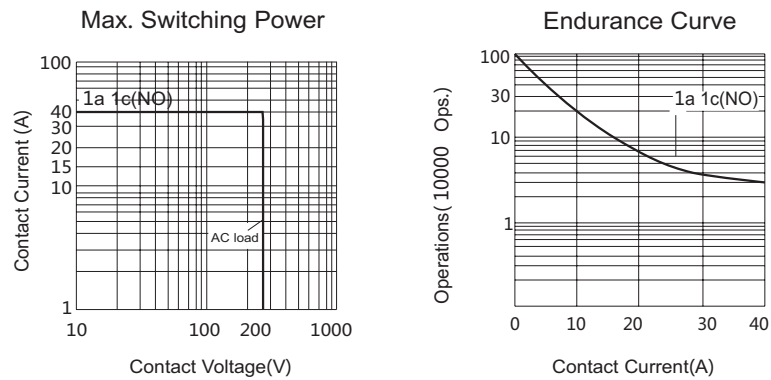

Note: If you choose the sealed type, before using, please remove the convex platform at the top of the case to ensure the normal performance of the relay after the completion of a PCB operations. they are as shown in the following diagram:

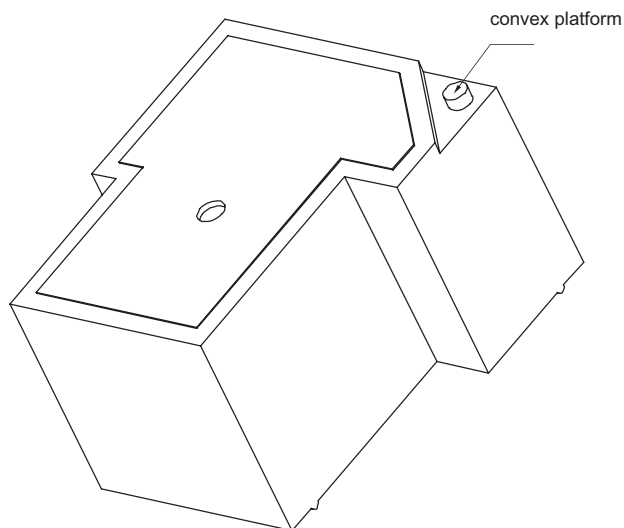

with convex platform

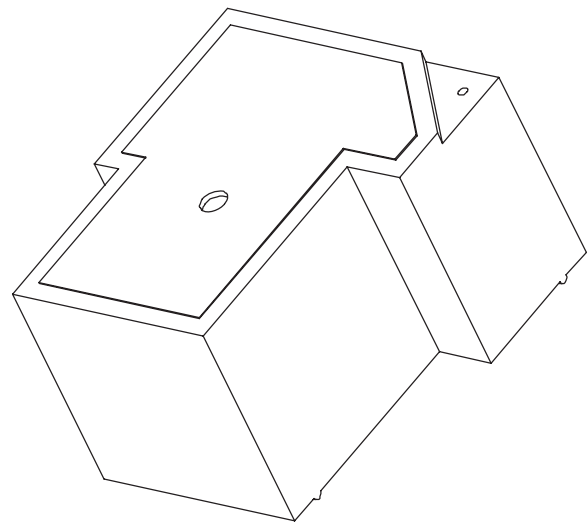

without convex platform

### Disclaimer:

This datasheet is the customers' reference. All the specification are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should in a right position to choose the suitable product for their own application. For sealed relays after installation and cleaning, please open the vent hole on the case before use. If there is any query, please contact Sanyou for the technical service. However it is the user's responsibility to determine which product should be used only.