

## STEERING DIODE ARRAY

**APPLICATIONS**

- ✓ USB Interface Ports
- ✓ Cellular Phones
- ✓ Video
- ✓ Handheld Electronics
- ✓ Personal Computers

**IEC COMPATIBILITY (EN61000-4)**


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 $\mu$ s - Level 2(Line-Gnd) & Level 3(Line-Line)

**FEATURES**


- ✓ ESD Protection > 40 kilovolts
- ✓ 225 Milliwatt Continuous Power Dissipation
- ✓ Provides Two (2) Lines of Protection
- ✓ **LOW LEAKAGE CURRENT < 1.0 $\mu$ A**
- ✓ **ULTRA LOW CAPACITANCE: 3pF Typical**

**MECHANICAL CHARACTERISTICS**

- ✓ Molded JEDEC SOT-143
- ✓ Weight 35 milligrams (Approximate)
- ✓ Flammability rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Marking: Marking Code

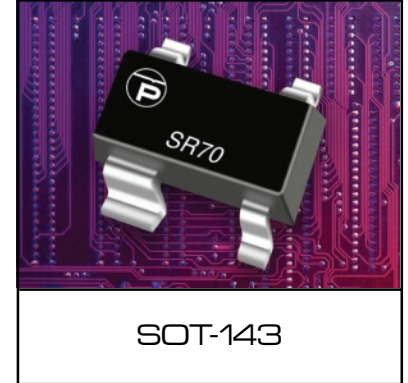

SOT-143


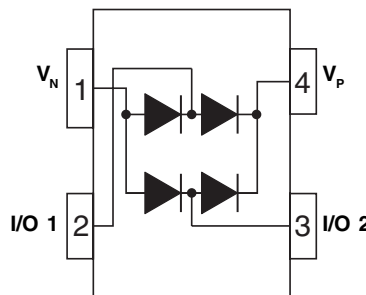
**PIN CONFIGURATION**

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	$T_J$	-55°C to 150°C	°C
Storage Temperature	$T_{STG}$	-55°C to 150°C	°C
Forward Peak Pulse Current ( $t_p = 8/20\mu s$ )	$I_{PP}$	24	A

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER	DEVICE MARKING	REPETITIVE PEAK REVERSE VOLTAGE	MINIMUM REVERSE BREAKDOWN VOLTAGE	MAXIMUM REVERSE LEAKAGE CURRENT	MAXIMUM FORWARD CLAMPING VOLTAGE 8/20 $\mu s$ $I_{PP}$ @ 1A	MAXIMUM FORWARD CLAMPING VOLTAGE 8/20 $\mu s$ $I_{PP}$ @ 24A	MAXIMUM CAPACITANCE (See Note 1)
		$V_{RRM}$ VOLTS	$I @ 50\mu A$ $V_{(BR)}$ VOLTS	@ $V_{RRM}$ $I_R$ $\mu A$	$V_{FC}$ VOLTS	$V_{FC}$ VOLTS	@ 0V, 1 MHz Cj pF
SR70	PSA	70	85	1	1.5	7	10

Note 1: Measured between I/O pins and ground. 3pF typical between I/O pins.

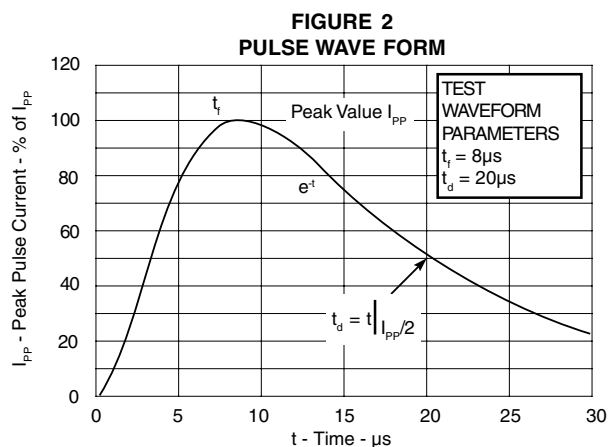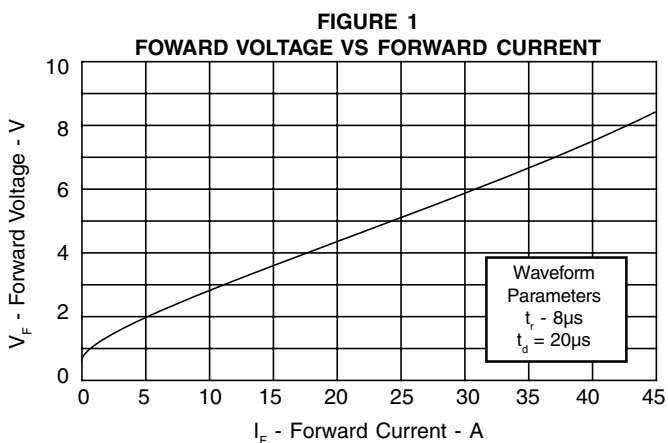

**PACKAGE OUTLINE & DIMENSIONS**

### PACKAGE OUTLINE

### SOT-143

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.0120
B	1.20	1.39	0.047	0.055
C	0.84	1.14	0.033	0.045
D	0.39	0.50	0.015	0.020
F	0.79	0.93	0.031	0.037
G	1.78	2.03	0.070	0.080
H	0.013	0.10	0.0005	0.004
J	0.08	0.15	0.003	0.006
K	0.46	0.60	0.018	0.024
L	0.445	0.60	0.0175	0.024
R	0.72	0.83	0.028	0.033
S	2.11	2.48	0.083	0.098

### MOUNTING PAD

TYPICAL		
DIM	Millimeters	Inches
1	2.85	0.112
2	2.00	0.079
3	1.80	0.071
4	1.90	0.075
5	1.05	0.041
6	2.75	0.108
7	1.20	0.047
8	0.80	0.031
9	0.85	0.033
10	0.85	0.033
11	0.85	0.033

### NOTES

1. Dimensioning and tolerances per ANSI Y14.5M, 1985.
2. Controlling Dimension: Inches
3. Dimensions are exclusive of mold flash and metal burrs.

### TAPE & REEL ORDERING NOMENCLATURE

1. Surface mount product is taped and reeled in accordance with EIA-481.
2. Suffix-T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., SR70-T7.
3. Suffix-T13 = 13 Inch Reel - 10,00 pieces per 8mm tape, i.e., SR70-T13.

**Outline & Dimensions: Rev 1 - 11/01, 06011**

**COPYRIGHT © ProTek Devices 2003**

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

**ProTek Devices**  
 2929 South Fair Lane, Tempe, AZ 85282  
 Tel: 602-431-8101 Fax: 602-431-2288  
 E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)  
 Web Site: [www.protekdevices.com](http://www.protekdevices.com)