

# HIGH VOLTAGE CERAMIC DISC CAPACTOR - LOW D.F.


Suntan®

DISCONTINUED

# TS16L

## FEATURES

- Use for coupling, and by-pass circuit there are a stable and high reliability products

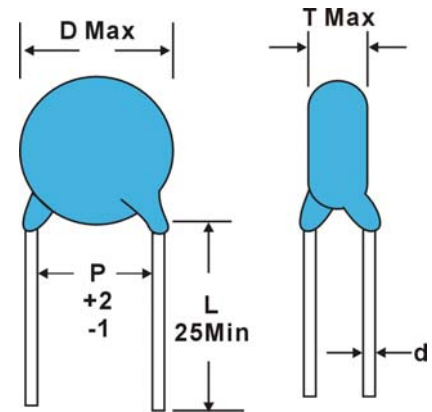

EPOXY COATED

## APPLICATION

- High-Voltage DC power supplies or discharges. (Lasers, X-ray apparatus, Mosquito Kill lamps, etc.)
- High frequency AC circuits.
- Noise Suppressor or horizontal out-put circuits. (TV, Monitor, etc.)

TEMP. CHARAC	Y5P (B)	Y5T	N4700
D. F. MAXIMUM	0.5%	0.3%	0.1%

T. C. W. V	Y5P(B)	Y5T	DIMENSION			
			D	P	T	d
1KV	101~561	101~561	06	5	4	0.6
	102	102	07	5		
	202		10	7.5		
	332		14	10		
	472		16	10		
2KV	101~331	101~331	06	5	4	0.6
	391	471	07	5		
	561	681	08	5		
	102	102	10	7.5		
	152	152	12	7.5		
	222	222	14	10		
3KV		101~221	06	7.5	5	0.6
	221~331	331	07	7.5		
	471~561	471	08	7.5		
	681~821	821	10	7.5		
	102	102	12	7.5		
	152	152	14	10		
6.3KV		221	07	7.5	6	0.8
	221~331	331	08	7.5		
	471	471	10	7.5		
	102	102	13	10		
8KV		151	07	10	6	0.8
	221	221	08			
	391	391	10			
	681	681	13			
	102~122	122	16			
10KV		121	07	10	7	0.8
	101~221	181	09			
	331~471	331	11			
	561~681	561	14			
	102	102	17			
15KV		820	08	10	7	0.8
	101~221	151	10			
	331~471	331	13			
	561	561	16			

Note: Specification are subject to change without notice. For more detail and update, please visit our website.