


# W210TS

## HIGH VOLTAGE, PHOTO MOS RELAY

# COSMO

### FEATURES

- Photo Mos Relay and Optocoupler in One Package
- Control 350VAC or DC Voltage
- Switch 130mA Loads
- LED control Current, 5mA
- Low ON-Resistance
- $dv/dt, >500V/ms$
- Isolation Test Voltage, 1500VACrms

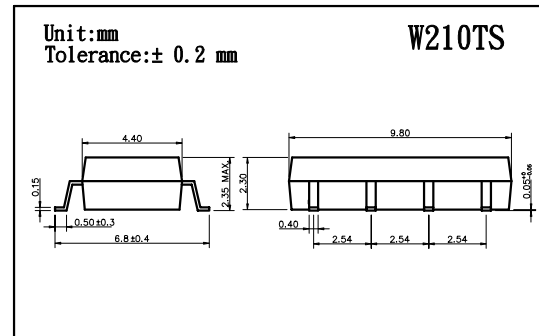

### Absolute Maximum Ratings( $T_a=25^\circ C$ )

#### Emitter(Input)

Reverse Voltage .....	5.0V
Continuous Forward Current .....	50mA
Peak Forward Current .....	1A
Power Dissipation .....	100mW
Derate Linearly from $25^\circ C$ .....	1.3mW/ $^\circ C$




#### Detector(Output)

Output Breakdown Voltage .....	$\pm 350V$
Continuous Load Current .....	$\pm 130mA$
Power Dissipation .....	500mW

#### General Characteristics

Isolation Test Voltage .....	1500VACrms
Isolation Resistance $V_{io}=500V, T_a=25^\circ C$ .....	$\geq 10^{10} \Omega$
Total Power Dissipation .....	550mW
Derate Linearly from $25^\circ C$ .....	2.5mW/ $^\circ C$
Storage Temperature Range .....	$-40^\circ C$ to $+125^\circ C$
Operating Temperature Range .....	$-30^\circ C$ to $+85^\circ C$
Junction Temperature .....	$100^\circ C$
Soldering Temperature, 2mm from case, 10 sec .....	$260^\circ C$

- Turn on/Turn off time

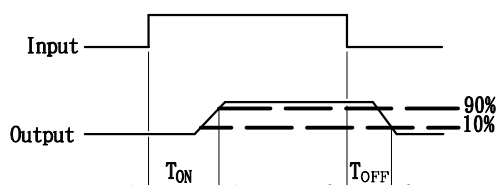

# W210TS



## HIGH VOLTAGE, PHOTO MOS RELAY

### Characterisitcs

(Ta=25°C)


Description	Symbol	Min.	Typ.	Max.	Unit	Test Condition
<b>Emitter(Input)</b>						
Forward Voltage	VF		1.2	1.5	V	IF=10mA
Operation Input Current	IFON			5	mA	VL=± 20V, IL=100mA t=10mS
Recovery Input Current	IFOFF	0.2			mA	VL=± 20V, IL<=5uA
<b>Detector (output)</b>						
Output Breakdown Voltage	VB	350			V	IB=50uA
Output Off-State Leakage	IT(OFF)		0.2	1	uA	VT=100V, IF=0mA
I/O Capacitance	CISO		6		pF	IF=0, f=1MHz
ON Resistance	RON		20	30	Ω	IL=100mA, IF=10mA
Turn-on Time	TON		0.3	1.0	ms	IF=10mA, VL=± 20V
Turn-off Time	TOFF		0.7	1.5	ms	t=10ms, IL=± 100mA

### Mos Relay Schematic and Wiring Diagrams

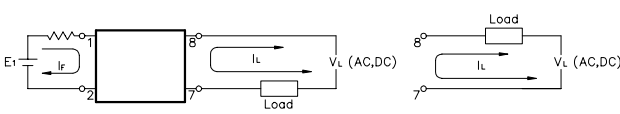
Type	Schematic	Output configuration	Load	Con- nection	Wiring Diagrams
W210TS		1a	AC/DC	-	

### DATA CURVE


Load current vs. ambient temperature  
Allowable ambient temperature:  
-40°C to +85°C

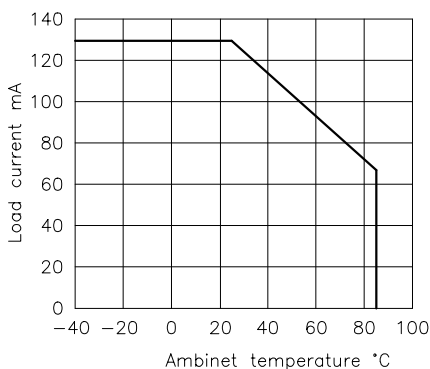

On resistance vs. ambient temperature  
Across terminals 7 and 8 pin  
LED current: 5mA  
Continuouse load current: 130mA(DC)

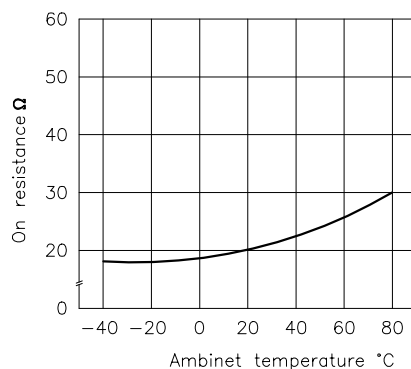


Trun on time vs. ambient temperature  
Load voltage 400V(DC)  
LED current: 5mA  
Continuouse load current: 130mA(DC)

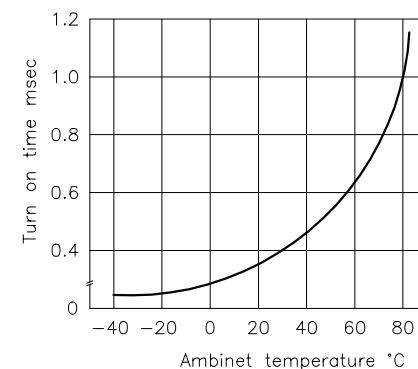


### W210TS


Turn off time vs. ambient temperature  
LED current: 5mA  
Load voltage: 400V(DC)  
Continuous load current: 130mA(DC)

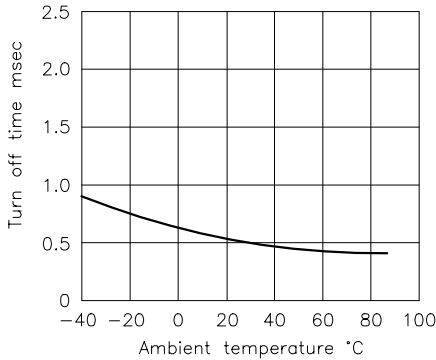


LED operate vs. ambient temperature  
Load voltage: 400V(DC)  
Continuous load current: 130mA(DC)

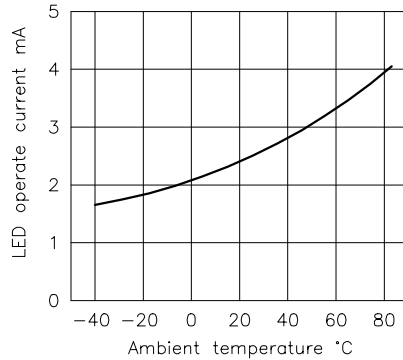


LED turn off current vs. ambient temperature  
Load voltage: 400V(DC)  
Continuous load current: 130mA(DC)

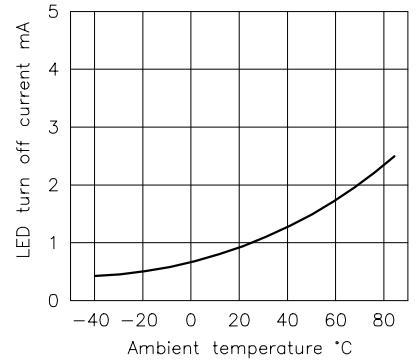


LED dropout voltage vs. ambient temperature  
LED current: 5 to 50mA

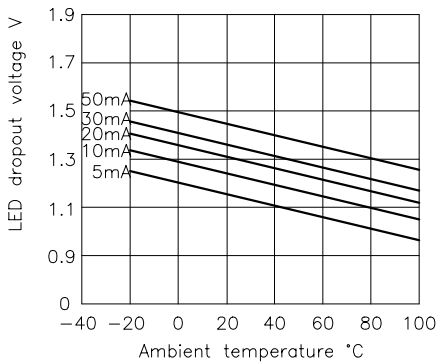


Voltage vs. current characteristics of output at MOS FET portion  
Measured portion: across terminal 7 and 8 pin  
Ambient temperature: 25°C




Off state leakage current  
Across terminals 7 and 8 pin  
Ambient temperature: 25°C

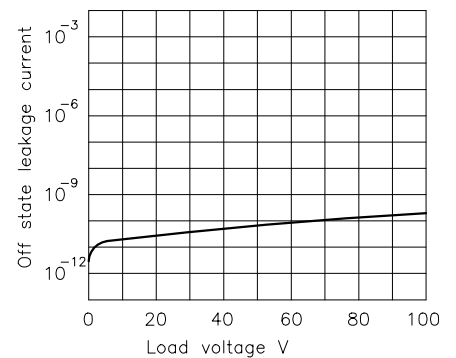

LED forward current vs. turn on time  
Across terminals 7 and 8 pin  
load voltage: 400V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25°C

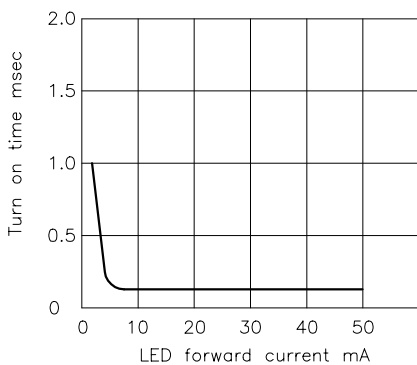

LED forward current vs. turn off time  
Across terminals 7 and 8 pin  
load voltage: 400V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25°C

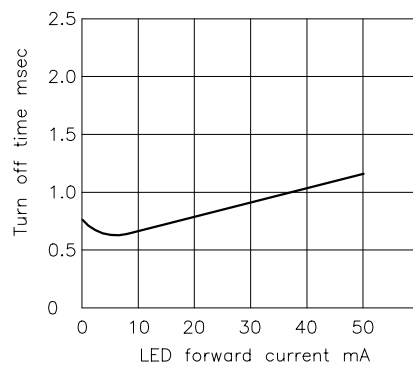

Applied voltage vs. output capacitance  
Across terminals 7 and 8 pin  
Frequency: 1MHz; Ambient temperature 25°C

